

February 2024
Draft Design Code Document Issue

Cambridge Northern Neighbourhoods Design Code

Inspired * Living

 Department for Levelling Up,
Housing & Communities

 GREATER CAMBRIDGE
SHARED PLANNING

**Pollard
Thomas
Edwards**

Contents

Introduction	03		
Supporting Documents	04		
Using the Code	05		
Area Map	06		
Engagement process	07		
Grove School Engagement	08		
Context and History	10		
Local Character	11		
Routes and Destinations	14		
Sustainable Homes - EPC Ratings	15		
Tree Shading	16		
Parks and Open Green Spaces	17		
Opportunities Framework	18		
The Five Principles	19		
1. Make Space for Nature	20		
- Greening opportunities	21		
- Urban greening	22		
- Nature Conservation	23		
- Living Landscapes	24		
- Water Responsiveness	25		
2. Prioritise Walking and Cycling	26		
- Movement opportunities	27		
- Green and Active Travel	28		
- Cycle and Wheeling Trips	29		
- Public Transport Use	30		
- Reducing Car Dominance	31		
3. Thriving Public Spaces	32		
- Public space opportunities	33		
- Cultural Sociability	34		
- Nature Based Play	35		
- Active and Healthy Lifestyles	36		
- Materials and Elements	37		
4. Enhance Character	38		
- Placemaking opportunities	39		
- Identity of Home	40		
- Enclosure and Focal Points	41		
- Scale and Form	42		
- Do's and Don'ts	43		
5. Increase Sustainability	44		
- Placemaking opportunities	45		
- New Buildings	46		
- Clean Energy	47		
- Climate Change Resilience	48		
- Improving Existing Buildings	49		
- Householders Guide	50		
Planning Checklists	51		

Revisions	
Rev	C
Date	13/02/2024
Notes	Issued for Draft

Copyright in this document and all contents belongs to Pollard Thomas Edwards LLP (excluding only material reproduced from other sources where shown).

Introduction

Introduction

The Cambridge Northern Neighbourhoods Design Code is a pilot design code that tests the process of consultation led area design coding to an existing residential area in Cambridge.

The area was selected as an example of the city's post-war suburban character and based on previous characterisation studies carried out. The area combines parts of Kings Hedges, Arbury and West Chesterton, and largely consists of estates of low-rise post-war housing development.

Prior to the code, there has been no specific design quality guidance for the area.

Change

The area is experiencing the pressures of development and changing need in the wider city. This has come through infill development, intensification and changing uses bringing change or erosion of character.

With many of the post-war structures now appearing to be nearing or even at the end of their original 'design life', and the need to meet more stringent energy requirements, we anticipate the pressure of change is likely to grow, whether through extensive refurbishment or replacing with new buildings.

The pressure of change is a significant challenge for this area, and others facing similar issues. However it also offers the opportunity, if used wisely, to bring improvement and investment to the area - while retaining its best characteristics. For example providing better and affordable homes, increased sustainability, better connections and a more attractive local environment.

The code has used a consultation led approach to start to capture key priorities for local residents to make future change work for them. We think it is essential that any future plan making works with local people and builds on this 'engagement first' approach.

Project Scope

The purpose of the code is to help guide investment, set a framework to co-ordinate, guide, and assess development through the planning process as well as enable and empower individuals and landowners to improve their homes and surrounding landscape

Beyond the boundaries of this code, it is proposed that the lessons learned, processes and principles from producing and using this Code could inform an approach to Coding in other existing areas of Greater Cambridge. We have titled this approach Inspired+Living.

The code acts as a catalyst for raising design standards in ways that reflect local priorities and the first steps in conversations about how the suburb can harness the pressures for change to help improve the area without losing its best qualities. In doing so, the design code seeks to address some of the strategic place-making challenges and opportunities that exists such as highway dominated areas, backland sites, spaces left over after planning, area with a poor public realm, poorly used garage sites, reinvigorate local centres/ community and non-residential buildings.

This makes it an unusual design code. It has not been developed on the back of any existing specific proposals or with the framework of a spatial masterplan for the area. In doing so, it has however exposed the need to develop a strategic plan for the area.

In their place, extensive consultation to establish local priorities has been distilled into 5 principles - around which this document has been based. These principles cover themes of nature, movement, public space, character, and sustainability.

The themes reflect the value placed on the mature green landscapes surrounding homes, and the strong sense of active and community in the area.

Beyond the detail within the principles themselves the code intends to:

- Encourage joined up thinking and an integrated approach from early design stages
- Provide guidance for outcomes that can be delivered flexibly at small or large scales
- Prioritise local leafy character and community while allowing for change and development
- Build upon existing local plan requirements

Getting the balance right

The Code's design requirements are targeted to deliver the key principles and aim to set out some simple and clear priorities for good quality placemaking.

As a result of the consultation process so far this has been balanced where necessary with practical planning considerations, and recognising the differing needs of residents - for example balancing the need for safer and greener streets while still ensuring that vehicle access is maintained.

Safety has been an important concern for many residents, and so we have included requirements for retaining open views of footpaths and spaces when planting new trees.

Other balances need to be struck where we find differing opinions, for example balancing the desire for better and more accessible homes for local disabled and elderly people, with some residents' wish to see no changes to buildings. We have also sought to balance between the poor condition of some buildings currently and reducing demolition and waste of embodied carbon.

Many residents have raised concerns about maintenance. We have built-in consideration of practical maintenance of spaces in the future and have worked with the council team to ensure we are not asking for outcomes that can't be delivered or maintained.

All the principles, as well as our initial suggested "next steps", include requirements for ongoing consultation with local residents as part of developing any future area proposals.

Next Steps

The area is experiencing physical challenges of aging estate buildings, combined with large surface parking areas and increasing pressure for infill and other ad-hoc development.

The challenges cannot all be met in a piecemeal way, and are unlikely to help retain the green and leafy qualities that residents value, or deliver improvements they want to see prioritised. Instead we need a strategic and more far sighted approach. As a result we have recommended next steps as part of the outcome of the coding process, that builds on the significant needs, priorities and opportunities for improvement that have come out of the consultation to date.

We advocate continuing to work closely with local people to apply the principles in this document through focussed and collaborative plan making to generate, test and coordinate ideas and sense check what may be possible - and when.

Producing the Code

This code was produced during a 6-month period through a combination of frequent internal meetings and workshops with council officers, online engagement, school project and public events.

The Greater Cambridge Shared Planning Service (GCSPS) secured funding as part of the National Design Code Pathfinder Pilot Phase 2 from the Department of levelling up, Housing and New Communities (DLUHC) to test how design coding could work in existing area at a city scale.

GCSPS commissioned Pollard Thomas Edwards (PTE) as the lead consultant, working with landscape architects Mcgregor Coxall, transport consultants DLP, to collaboratively develop the design code with Greater Cambridge Shared Planning and the community.

The code was also developed in consultation with the Department for Levelling Up, Housing and Communities (DLUHC) and builds on the National Model Design Code - which provides detailed guidance on the production of design codes, guides and policies to promote successful design.

The National Model Design Code 10 characteristics of a well-designed place provided a key starting point for our conversations with residents. The headline characteristics have been condensed from 10 characteristics to be folded into our 5 broader statements of principle to reflect the resident priorities we identified, and drawn together to promote an integrated design approach.

Supporting Documents

Key Resources

This code is not intended as a standalone document. First and foremost it builds upon council policies held in the Local Plan. Where necessary specific policies have also been referred to.

To assist applicants, design teams, local residents and officers we have also referred to established good practice, further reading and potential support from other organisations, policies and standards. Links to these have been signposted on each of the principles pages.

The following list sets out some key documents and other links which can help teams to deliver the aspirations and expectations of the code. Please note that this is not intended to be exhaustive.

Local Policies

Cambridgeshire City Council Local Plan 2018

Policy links have been flagged in the document as part of certain specific requirements. For avoidance of doubt, all policies indicated as a “must” are intended to reflect established and enforceable local plan policies.

All the current local plan policies can be found on the council website.

cambridge.gov.uk/local-plan-2018

3. Thriving Public Spaces

Charter for Play, Play England

Designing for play to prioritise the social, emotional, intellectual and physical development of children.

playengland.org.uk/

Sport England Active Design

Active Design sets out how the design of our environments can help people to lead more physically active and healthy lives - it's about helping to create 'active environments'.

sportengland.org/guidance-and-support/facilities-and-planning/design-and-cost-guidance/active-design

1. Make Space for Nature

Green Infrastructure

The GI Framework helps local planning authorities and developers meet requirements in the National Planning Policy Framework.

The Framework has also been developed to enable other organisations and groups such as parks and greenspace managers and local communities to think more about green infrastructure and plan for its creation or improvement

designatedsites.naturalengland.org.uk/GreenInfrastructure/Home.aspx

4. Enhance Character

National Design Guide

This guide produced by the Department for Levelling Up, Housing & Communities illustrates how well-designed places that are beautiful, enduring and successful can be achieved in practice.

gov.uk/government/publications/national-design-guide

Cambridgeshire Quality Charter for Growth

Sets out core principles of the level of quality expected in new developments in Cambridgeshire

cambridge.gov.uk/media/2950/cambridgeshire_quality_charter_2010.pdf

2. Prioritise Walking and Cycling

Manual for Streets 2

Intended to assist creative design and helping to prioritise people and public space in the planning, construction and improvement of our streets.

tsrgd.co.uk/pdf/mfs/mfs2.pdf

Cambridgeshire Active Travel Strategy

Provides policies to enable and encourage more people to travel by active travel modes and reduce the number of journeys made by car.

cambridgeshire.gov.uk/residents/travel-roads-and-parking/transport-plans-and-policies/cambridgeshires-active-travel-strategy

5. Increase Sustainability

Cambridge Sustainable Housing Design Guide (2021 revised edition)

Provides a summary of the council's expectations for sustainable design and placemaking for council homes.

cambridge.gov.uk/media/1503/cambridge-sustainable-housing-design-guide.pdf

LETI

Is a body of voluntary network of professionals that provides advice and guidance to deliver zero carbon. The website has links to a wide range of technical guidance, support and project examples.

leti.uk

Shading for Housing

Practical overview and guidance on selecting products to tackle overheating in buildings.

goodhomes.org.uk/news/shading-for-housing

Retrofitting Your Home

Cambridge City Council document providing guidance for small and large projects to improve energy efficiency in your home.

cambridge.gov.uk/media/11676/retrofitting-your-home-report.pdf

Applying the Code

Role of the code

The role of the code is to promote high quality sustainable design for homes and buildings, streets, and green spaces.

At the small scale the code is intended to inspire and set out placemaking requirements so that each project as it comes forward can be harnessed to contribute to resident priorities for improvement – for example retaining and adding green thresholds, hedges and trees.

The code encourages and signposts for ways for local residents to have more involvement in the green spaces – including supporting increased resident social management for the existing shared estate spaces, maintaining spaces for example for food growing or nature conservation.

At a larger scale, the code is intended to act as a launching point for future strategic area improvement and investments that build on resident’s priorities.

The code should not be seen as a tool to prevent change, but a way to harness the opportunities that development and investment can offer to deliver benefits that can reflect local priorities.

Using the Code

The code requires an integrated approach to design. The code is a compact document and code users are intended to show how their proposals comply with the 5 principles and work together to deliver an attractive sense of place.

It is recognised that some types of projects and particularly smaller projects will have correspondingly varying scope to apply some principles. For example, a single house is unlikely to deliver public space or highway improvements. It can however contribute to the street, make space for nature in its threshold planting and boundaries, and use sustainable design and materials. In contrast, larger and multi home developments will be expected to address all aspects of the code where there is scope to do so.

For planning submissions, applicants are recommended to assess the relevant principles to their project and confirm these with their planning officer at the early stages of the project.

Status of the code

This is a draft Design Code SPD for consultation. Following consultation, the councils will seek to adopt it.

The code will be used by:

- 1) developers /applicants /infrastructure providers preparing their schemes
- 2) the public when reviewing and commenting on planning applications
- 3) decision makers in determining applications

The code must be referred to for all planning applications that lie within the area in this document. For applications lying on or near the boundaries of the area, the Code should also be considered when establishing the principles behind designs.

The Code is intended to guide development and adaptation of all aspects of public realm and landscape, movement routes, and buildings.

The code is not a standalone document. It is intended as a helpful, illustrated summary of the principles that we expect development teams to adopt when undertaking projects within the study area. To keep the code short, and avoid repetition of existing documents, we have signposted and provided helpful links to sources of detailed technical guidance. A summary of local planning guidance documents is included in the appendices of this document.

The Design Code is intended to supplement the existing Cambridge Local Plan. However, it would also need to work with changes proposed to Plan making regulations (including the requirement for local authorities to produce design codes), the NPPF and following the adoption of the new local plan. Therefore, this Design Code is an important pilot to help shape the future District Wide Design Code and any site or area specific Design Codes the Councils may wish to bring forward

Reading the principles

The principles follow a standard format. A bold introduction statement and illustrative graphic at the start of each principle strategic outcomes that must be delivered. Subsequent pages provide detail guidance on different aspects of the principle using illustrations and precedents.

Must and Should

Guidance within the Code contains two levels of compliance:

- Where compliance is a mandatory requirement, the word ‘must’ is used
- Where compliance is recommended, the word ‘should’ is used.

For avoidance of doubt, all policies indicated as a “must” are intended to reflect established and enforceable local plan policies.

A completed Compliance Checklist and accompanying proving illustrations must be included as part of future Reserved Matters Applications and we suggest this is incorporated within the Design and Access Statement (DAS).

Where guidance is NOT followed the alternative design proposals must be justified by their potential benefits or by the need to meet changing legislation, varying circumstances, or technical advancements.

All deviations from the Code must justify how they maintain the wider quality, sustainability, and placemaking, requirements of the Code.

Status of Images

All diagrams are illustrative unless otherwise stated.

While the principles they illustrate should be followed by designer, they should not be treated as fixed outcomes. The Code sets a quality baseline. Development proposals should show innovation and set out how they can deliver or exceed the requirements set out in this Design Code.

Framework Plans

Over the development of the code council officers and residents shared their concerns and issues about specific places, using the digital map hosted on the Citizen-Lab website.

We have mapped these onto a spatial plan for the area, highlighting those areas where specific concerns or suggestions have been raised. Where specific objectives or principles are seen as particularly relevant these are highlighted. This illustrative framework is not a blueprint but is intended to help provide a starting point for design teams when considering improvements.

Updating the Code

The life of Design Code can and should be long, and technology, social needs, and other opportunities for further improvement will emerge over time. A good example of this may be changing patterns of car ownership – allowing reduced parking and improved use of allocated space.

A first review should take place to reflect the adoption of the new local plan – to ensure that the ‘must’ and ‘should’ requirements reflect the new policies. The principles have been developed with regard to the emerging local plan, with the aim of simplifying this update.

As things change, while the overarching principles set out by the code must be retained, the detail of how this is delivered could change with good justification to achieve similar or better outcomes. This flexibility is part of the robustness of the Code – ensuring it stays relevant in future.

With a collaborative approach and dialogue, the detail content of this document should be open to periodic review to ensure its contents remain relevant, with any proposed changes taken to the Quality Design Review Panel as well as other consultees.

Inspired+Living

In proposing the design principles, we have thought carefully about how they can be applied more broadly to other similar suburbs and neighbourhoods. Issues of weak infrastructure, eroding green spaces, pressure of change, and weak built character, are common problems for suburbs. It is intended that lessons learned and principles from The Cambridge Northern Neighbourhoods Design Code pilot will be taken to other suburban areas of the city in a collective approach we are calling Inspired Living.

Results of the code will be shared nationally to help guide the production of other district and citywide design codes that all councils will be required to produce in the future.


Area Map

The Cambridge Northern Neighbourhoods Design Code is focussed on two distinct suburban areas, lying to the east and west of Arbury Town Centre and Arbury Road.

The area is bounded to the north and east by Kings Hedges Road, and to the west by the emerging Darwin green Development. To the south the coding area boundary is more varied, but includes the rear garden boundaries of Gilbert Road, Milton Road, and Highfield Avenue.


The Boundaries of the Design Code were chosen based on previous character studies carried out for Cambridge. The area from the studies are identified as suburban post-war housing. This reflects the intention and background of the code as a pathfinder pilot project and was a practical tool that helped the team focus on buildings and places of similar age and shared characteristics.

The red line is a result of an area-based approach. However, we believe the principles the team have developed with the residents are applicable in many other residential neighbourhoods, and where new developments bound it we recommend the Principles in this Code are still considered.

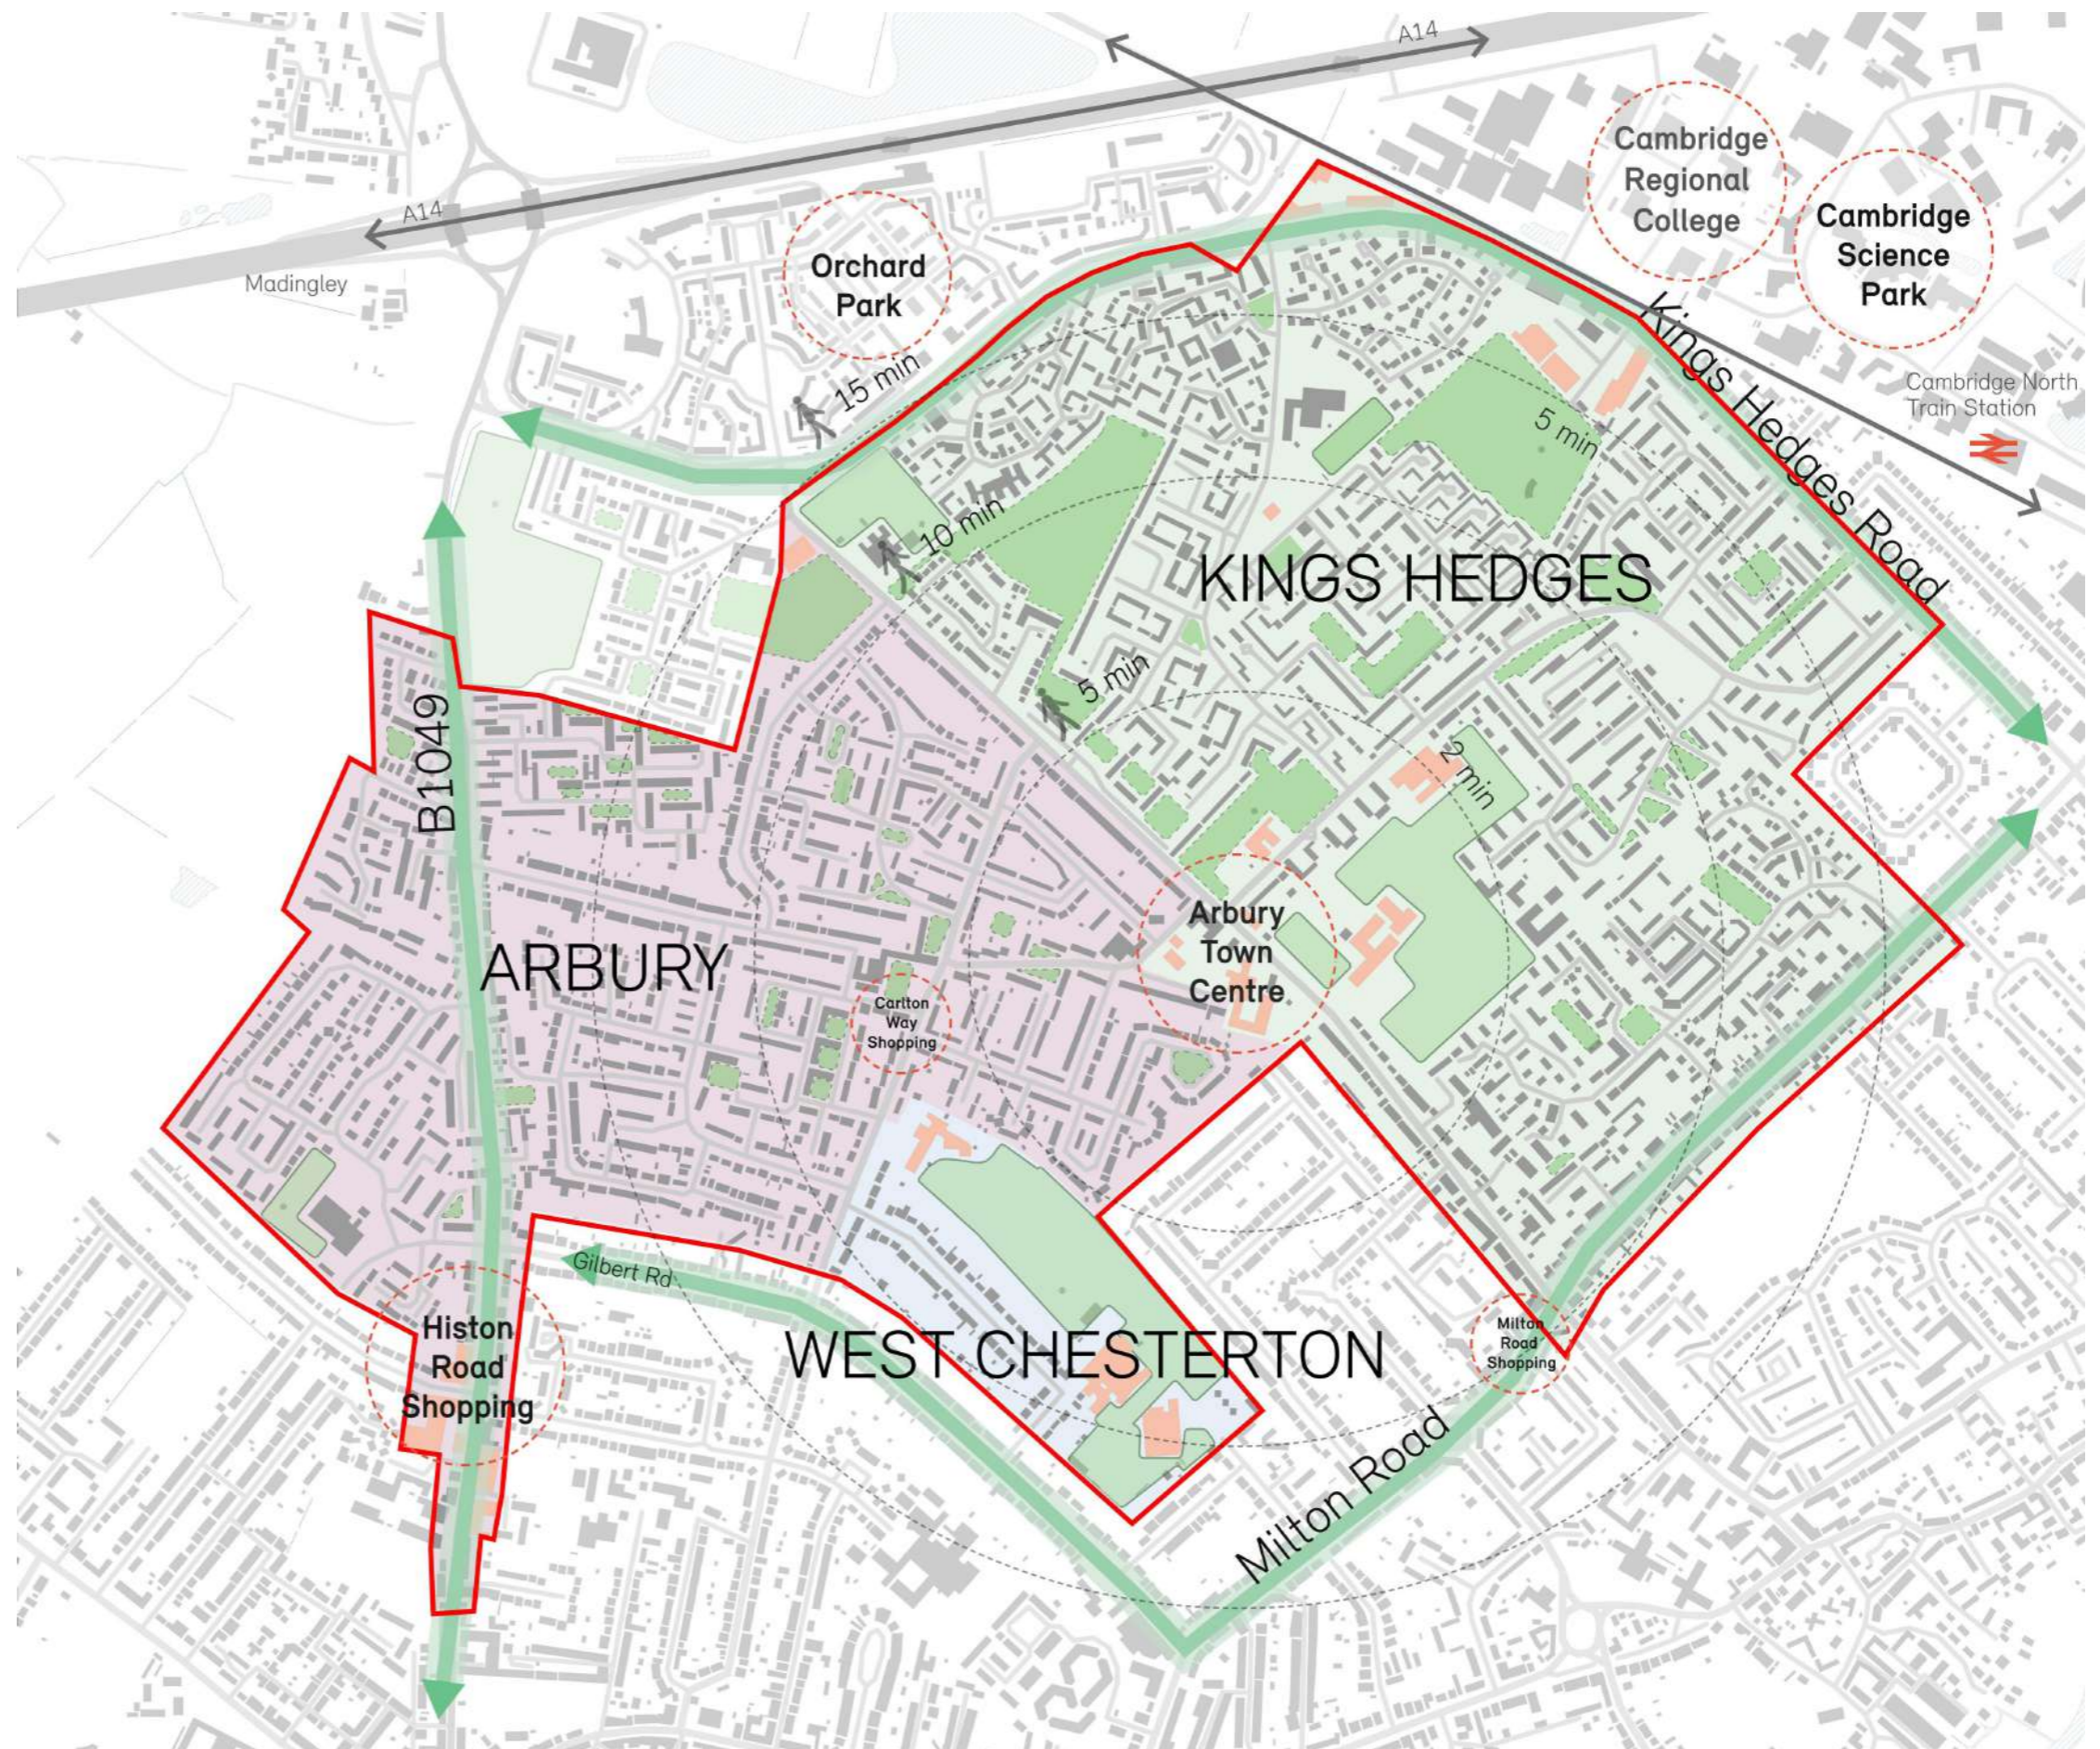

KEY

- Buildings
- Specific buildings
- Green spaces
- Study area



Engagement process and the core group

Public engagement has been central to the creation of the Design Code, informing both its structure and content. This engagement needs to be built on and continue in future.

The team used a combination of online and in-person events and surveys to track the gather local information and concerns. Engagement was split into 3 Phases to help the team manage the process from listening to local concerns and priorities and developing the principles, through to sharing final drafts of the document itself.

Citizen-Lab online engagement and surveys

Online engagement was carried out using Cambridge's Citizen-Lab software. Public neighbourhood engagement ran for 6 months on the site.

The team recorded almost 200 conversations, comments, and detailed surveys over the life on the project. This has guided both the principles and much of the detailed content of the code and given the project a powerful resource to draw from.

Volunteer conversations

We worked on-line with a small group of residents to discuss their feelings about having a design code for the area, and how residents could make use of it to help them positively shape the area in future.

In-person workshops and conversations

3 in-person events were held at the Meadows Community Centre during the life of the project. These were attended by small numbers of residents. During the events we exhibited progress on the code and provided hard copy versions of the online surveys. We also held presentations and workshops at each event, giving residents the chance to explore and map the different challenges in the area, and how the code could tackle them.

Core Group

The core group was assembled to bring together strategic stakeholders and decision makers from across the local authority and statutory consultees. Members included highways, landscape, housing, sustainability, strategic planning, and development management. By combining leadership and decision makers from a wide range of professional disciplines, and working in a round table way, the group has helped build confidence in the code to be ambitious, but also focussed and deliverable.

The core group met online each month to track progress. Themed workshops took the code from identifying overarching principles through to detail coordination and testing.

Members of the group also attended walkabouts and in-person resident workshops. This brought expertise and the chance to discuss principles and priorities directly with residents.

Joint Greater Cambridge Design Review Panel/ Cambridgeshire Quality Panel

The draft principles and code were presented to a joint meeting of the Greater Cambridge Design Review Panel/Cambridgeshire Quality Panel.

The panels welcomed the consultation that had been undertaken and the principles and key content. Detail comments from the panel have been incorporated into the completed code including:

- Strengthen recommendations to address ongoing challenge of aging estate structures and sustainability
- Emphasise landscape and nature detail requirements to link better with the other principles
- Provide guidance for householders on how to apply code principles

Disability Consultative Panel

The draft document was presented to the Panel. The Panel welcomed the Code principles and ambition. Key points raised by the Panel included:

- Need to focus on improving conditions and poor accessibility in many homes for vulnerable people
- Insecurity of many existing flat blocks
- Importance of convenient vehicle access for disabled people (particularly taxis)
- The Importance of creating accessible and welcoming social and activity spaces to combat loneliness, depression and isolation

Engagement Record


A full engagement and consultation report for the project has been produced and is available via the Citizen-Lab website.



Image of a residents workshop




Consultation boards from a residents workshop

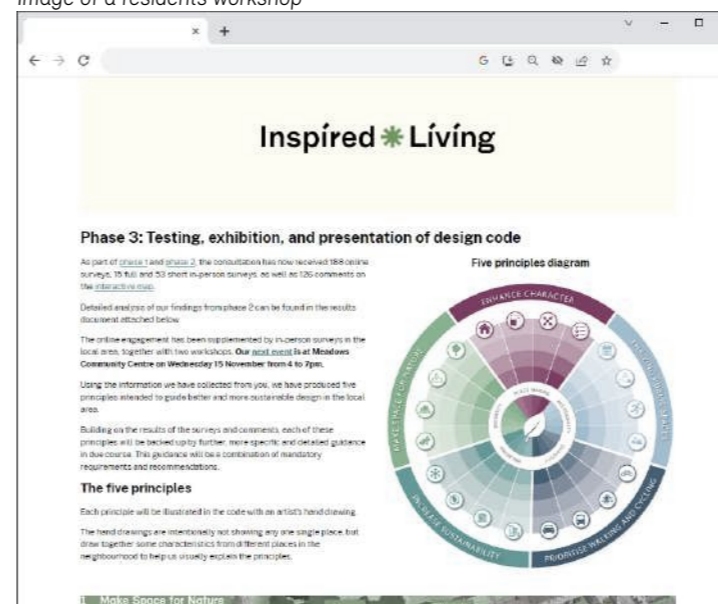

CitizenLab online engagement



Core group on a walking tour around Arbury and Kings Hedges

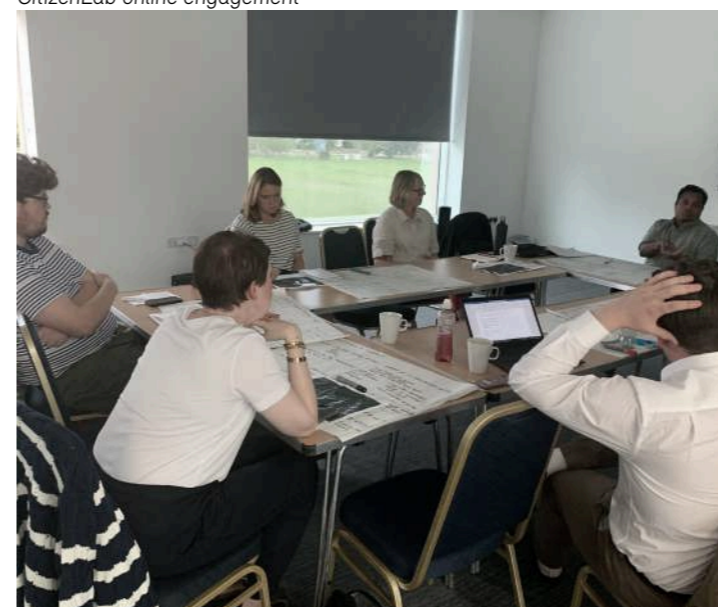

In-person workshops developing the Code



Core group on a walking tour around Arbury and Kings Hedges

Grove School Engagement

The code team worked with the Council's Youth Engagement Service and the staff and students of Grove Primary School to share the code's 5 principles and gain ideas and feedback. Grove Primary School is well placed for this engagement, located near to Arbury town centre.

We spent 1.5 days with the school, in activities designed to align with Key Stage 2 National Curriculum subjects science, art and design, geography, design and technology and citizenship to ensure relevance and educational value. A total of 67 year 5 and year 6 students took part.

Activities included careers advice, introduction to biodiversity principles and challenges, what is a design code, and a follow-up quiz – alongside project specific learning and creative tasks.

Project activities

The student's project work focussed on a trip to the town centre of Arbury, including Arbury Court, car park and play area. Tasks covered each of the 5 principles of the code, learning what they meant, how they work together, and thinking about creative ways they can be applied in the area.

As part of outdoor learning, the children answered questions about what they saw and what their favourite things were. Questions requiring observation were combined with more searching questions including:


- What would make it nicer or easier for you to walk or ride your bike to the town centre?
- How can being near nature and animals help people?
- How can we protect our environment?
- Why it is a good idea to live near Arbury town centre?

Answers to these questions have been incorporated into the code. Key outcomes were a focus on incorporating nature and play, with a strong preference for planting more trees and creating safe habitats for animals.

Creative tasks

Each student produced a design or drawing based on one of the different principles of the code.

1. Draw the nature and animals you saw on the trip
2. Design a cycle/scooter friendly parking area

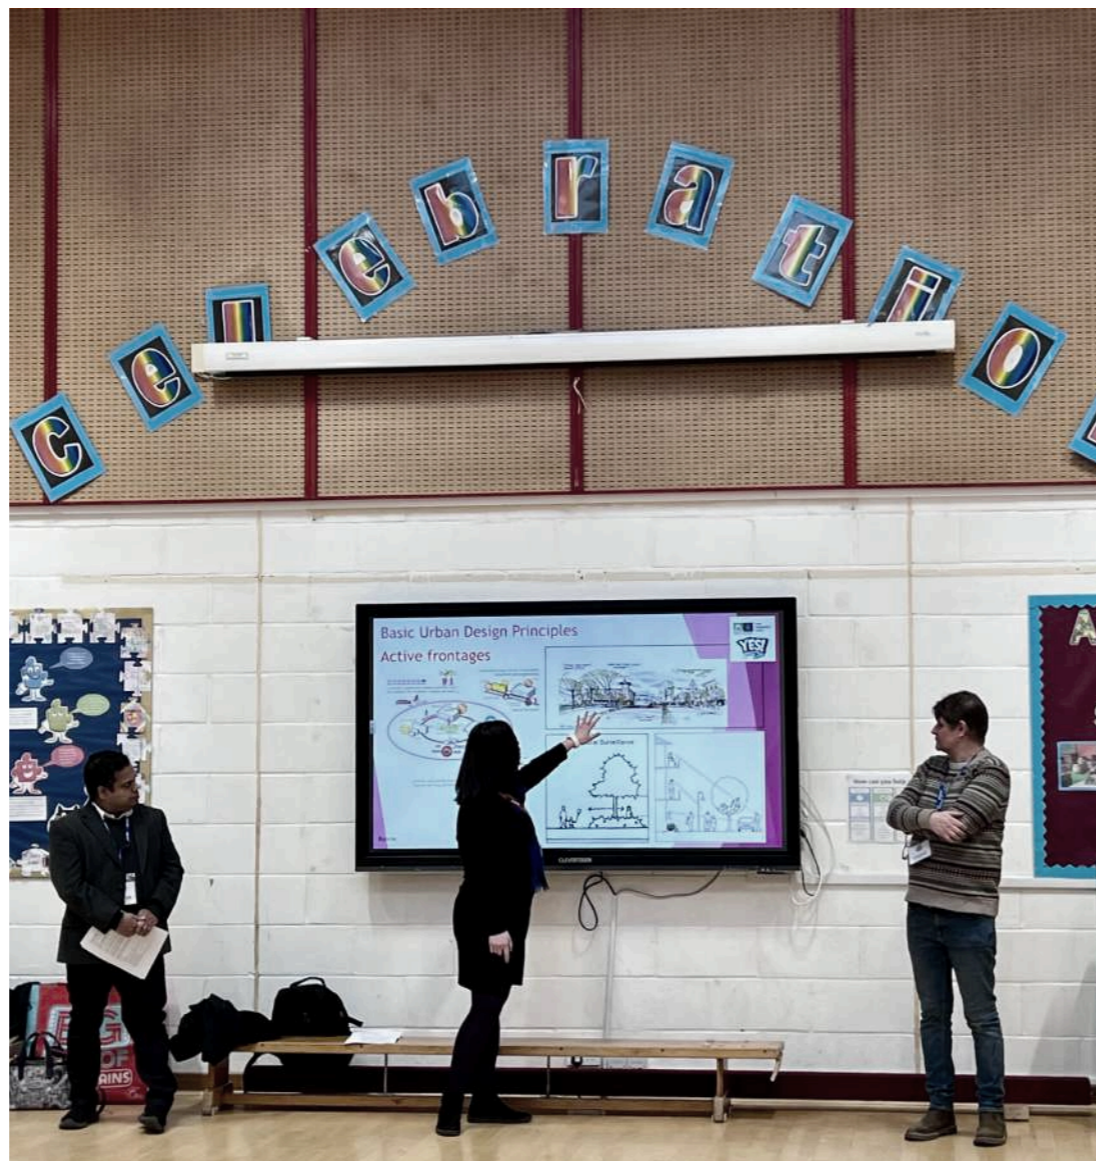

Presenting urban design to year 5 and 6 students



Facilitator speaking to year 5 and 6 students on what they can imagine for Arbury Court



Judging of the bird box and bird feeder competition



Councillors discussing the potential of Arbury Court




Judging of the drawing competition

Grove School Engagement

3. Design a play space
4. Design the town centre of the future
5. Design a sustainable building

The outcomes of the creative task were excellent. The students' drawings have successfully captured each of the 5 principles and more importantly reflect the integrated spirit of the code by consistently showing how the principles could work together to make the better places they want.

Each student also decorated their own bird feeder or bird box which they can keep and install at home.

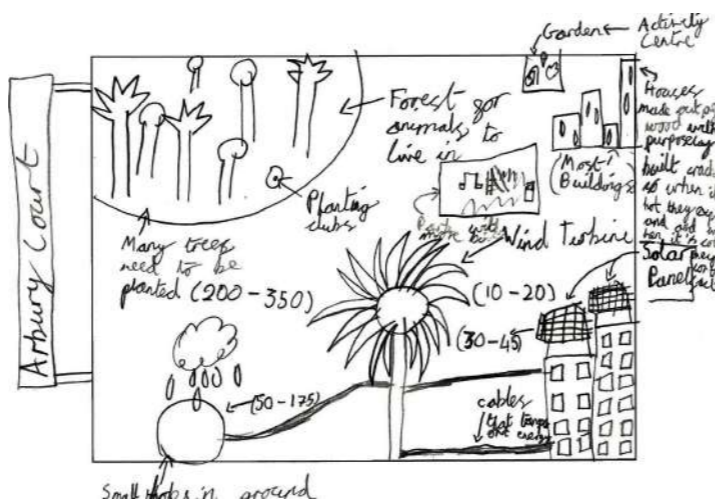

Drawing winner of increase sustainability by Yahya



Year 5 and 6 Bird Feeder Finalists



Drawing winner of make space for nature by Adele

Reflecting engagement outcomes in the code

It was powerful for the team to see the area from the perspective of younger children. It was also interesting to see how the students' priorities aligned to most adults we have spoken to, and how clearly these were expressed with drawings dominated by green trees, animals, and places to be together.

The outcomes have been enhanced priorities for the five principles such as:

Make space for nature

Restful spaces for people that provide homes and habitat for animals. This should include bees and other insects as well as larger animals and birds



Year 5 and 6 Bird Feeder Finalists



Drawing winner of promote cycling and travelling by Elena



Year 5 and 6 Bird Box Finalists

Promote walking and cycling

Create attractive welcoming cycling facilities that are a joy to use. The children included designs for bright indoor spaces, as well as outdoor stands integrated with trees and landscape.

Thriving public spaces

Children are often not inspired by large, grassy areas and want more imaginative and varied play. This might include slides incorporated into the landscape, safe water play, and places to meet and be together.

Enhance Character

Consider how sense of place engages all the senses. For example, the bakery is popular due to its distinctive and pleasant aroma.

Increase Sustainability

combines many aspects of design. Many children wanted designs to collect water in shallow ponds which can contribute to recreation and habitat for animals.



Drawing winner of enhance character by Emilia



Drawing winner of thriving public spaces by Valentine

Context and History

The Study Area

The Northern Cambridge Neighbourhoods in this code are made up of post-war areas of King's Hedges, West Chesterton & Arbury. The area is bisected by Arbury Road, which defines the two main neighbourhoods of the Code's study area – Arbury to the west, and Kings Hedges to the east.

Early history

The Roman Road of Akeman Street, which linked Cambridge to the north coast of Norfolk, runs through the area. The road ran northeast following the present-day Carlton Way and Mere Way, and through the Kings Hedges recreation ground.

During the medieval period the area became meadows and common land, following which the meadows were also dug for brick manufacture.

The land east of Arbury Road was known as Albrach from as early as the 13th century. In 1558 it was enclosed and renamed Kings Hedges. The name is believed to derive from it being the hedges of the ancient King's hunting preserve.

While Cambridge grew to the south and west of the area before the war, both Arbury and Kings Hedge's remained a network of fields and hedges until the development of the estates.


Development

Development of the estates began in the Arbury area, starting in 1957 and continuing through the 1960's. Arbury Court and the nearby Church of the Good Shepherd where both developed in this period.

Construction of the King's Hedges Estate began in 1967. These homes were intended predominantly for families moved from older parts of the city. The designs for the estate were innovative for the time, separating cars and walking routes. This has left a legacy of extensive green spaces but also poorly connected streets

Arbury town centre has developed over the years, with the original street access for Arbury Court filled in to build a supermarket. The original school that fronted Arbury Road was demolished and rebuilt on land behind it - leaving the frontage bare. These developments physically isolated the town centre from Arbury Road, making the town centre feel more fragmented and less visible than was originally planned.

1953

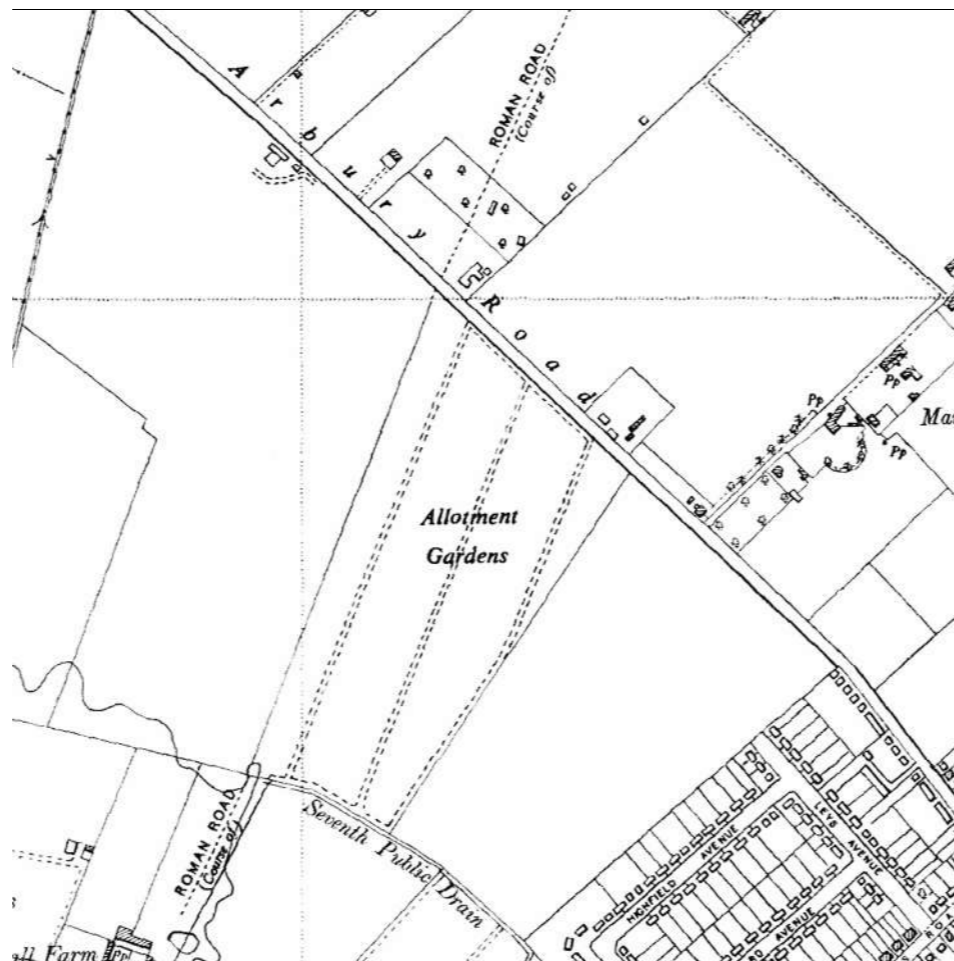


Historical OS map from 1953

1992



Historical OS map from 1992

1973

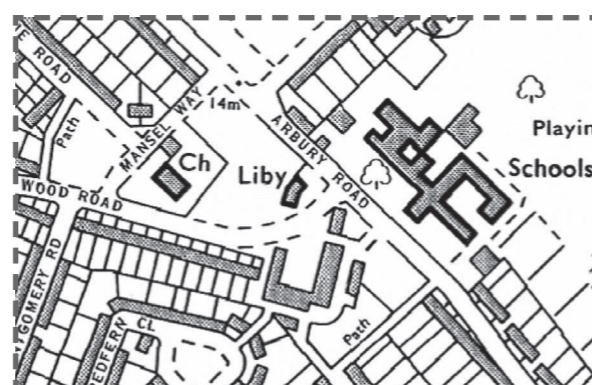

Historical map of Arbury Road, with the Original Arbury Court 1973

1992



Historical map of Arbury Road, with Arbury Court taken in the 90's, 1992

2023



2023 Aerial and street view of Arbury Court

Age and Condition of Buildings

Having been constructed between the 1950's and 1970's, many components of the existing estate buildings within the local area have reached or will soon be reaching the end of their original design life. Recent surveys for Arbury and Kings Hedges Wards demonstrate 16% of units with Energy Performance Certificate (EPC) ratings of D&E rating. These ratings can result in poor living conditions for residents, so requiring major investments to be made to achieve even the minimum C rating.

Problems with some existing estate buildings have included:

- Underused areas of the building leading to anti-social behaviour
- Poor building design, such as cold and thin walls
- Poor accessibility
- Lack of secure entrances,
- Lack of access to green spaces
- High heating bills

The aging of estate buildings represents both significant challenges and opportunities to apply the principles of the code in creative ways, balance existing and new buildings, and reflect the character of different neighbourhoods.

Reusing existing buildings reduces carbon emissions and can help to retain local character – but also limits the opportunities to enhance design quality – for example options for external building appearance, or accessible layouts inside the home.

Replacing buildings brings more opportunities to improve design and provide better homes – but results in more carbon emissions during construction. This must be reduced by following the sustainability principles in the code for example working to reuse materials on site wherever possible.

Working with existing building residents

Major change of any kind can be disruptive to residents – whether with a 'deep retrofit' of existing buildings, or their replacement with new homes. It is vital that the priorities of existing building residents are understood through consultation and factored in early in the process.

Every project is unique but resident priorities emerging from recent project surveys carried out by the housing team at Cambridge City Council have been:

- Reduced bills
- Improved safety and security
- Providing more, affordable, homes
- Attractive appearance and a modern character

More than buildings themselves, retaining sense of community and local friendships is of paramount importance to residents. Where buildings are to be replaced, new homes should be made available to existing residents allowing a single move to help minimise disruption and keep communities together.

Retrofit vs rebuild assessment

To minimise embodied carbon resulting from new developments, assessment to retain some or all existing structures within major (10+ home) development sites should be carried out at the early planning stages, during the brief development and scoping for the project.

Take a retrofit first (retrofirst) approach, including adaptive building reuse with some new additions.

Where demolition is required or appropriate – for example to enable better accessibility for residents, buildings can become 'material banks' rather than being wasted. Projects must emphasise material re-use e.g. reusing bricks rather than crushing for hardcore. As well as being more sustainable, this could also help retain local character.

Feasibility

At initial stages, feasibility testing may be practically demonstrated through desktop studies, analysis drawings and strategic diagrams for example:

Condition – assess challenges, requirements and opportunities to maintain/improve the structural condition

Energy – current energy use and strategies/challenges for improvement

character – analysis of buildings/layout and contribution to place, or potential to be adapted – e.g. by improving poor natural surveillance on frontages

Fitness – accessibility and likely sustainable future use

Wider opportunities – look beyond the site boundaries, what are the site opportunities to deliver on local priorities?

- better connectivity
- better access to green space
- Improved public realm and placemaking
- more affordable homes

Demonstrate challenges/synergies for existing structures to adapt to deliver these opportunities.



Local Character

Arbury

The Northern Cambridge Neighbourhoods in this code were identified as a distinct area of post-war suburban housing and housing estates based on previous character studies conducted for Cambridge City.

However, the area has more than one character, and there are a variety of different styles and periods of post-war architecture and planning, from homes set around leafy tree-lined avenues in Arbury, to larger 'set piece' estate planning and green spaces in Kings Hedges. Both areas include a mix of houses and flats, with noticeable changes in scale.

The urban layouts are characteristic of mid-20th century design, contrasting between street facing homes oriented around private cars and private gardens, and planning for more shared (often very undefined) green spaces, separation from the car, and focus on communal benefits.

While they have challenges, this contrast in layout is an asset, giving distinctiveness to the two areas. The code principles have been developed to be equally relevant to these contrasting characteristics and encourages the Five Principles to be applied in different ways to retain positive character while allowing necessary change.

The key characteristic of Arbury is its green and leafy frontages. The street network is clearly defined and is lined with grass verges and trees. Front gardens are typically deep and building frontages maintain consistent building lines. Existing flat blocks stand out in the area, often planned against the grain of the area, and taller than surrounding buildings.

- A. Encourage retention and reinstatement of front garden planting and hedges and avoid excessive paving over front gardens
- B. Promote tree planting and maintaining planted verges in the highway
- C. Protect green spaces from fly parking and encourage socially and environmentally beneficial uses.
- D. Encourage new socially, economically, and environmentally beneficial uses for redundant garages and garage areas
- E. Encourage opportunities to appropriately strengthen character and sense of place with memorable landscape spaces and building designs.
- F. The neighbourhood's bungalows are increasingly being redeveloped. New developments should include homes for older people to preserve the mix within the local community.
- G. Improve integration/planning of flat blocks
- H. Enhance status of Arbury Town Centre emphasising co-location of uses, improved buildings and frontages and mixed use design



CGI Aerial over Arbury



1. Typical leafy suburban street in Arbury



2. Flats above Arbury Court



3. Front garden treatment of a suburban street in Arbury

Local Character

The key characteristic of Kings Hedge's Estate are its communal green spaces including shared garden squares and large parks that are interspersed with clusters or long terraces of houses and four storey flats.

While there are a lot of green spaces, many lack a clear function and the parks are separated from the main network of routes on the estate which reduces their accessibility, visibility, and benefit to residents. Private gardens are small, and the front gardens are typically hard paved areas containing very little planting.

Streets are often poorly overlooked. The backs of homes and garages line long cul-de-sacs, large parking courts, and alleyways.

The Code Principles should be applied to enhance character and enable positive changes and improvements:

- A. Improve access to nature and good quality green spaces
- B. Promote trees and other planting in front of homes 'hedges for Kings Hedge's'
- C. Encourage positive use for green spaces such as community gardening and food growing
- D. Enable new socially, economically, and environmentally beneficial uses for redundant garages and garage areas to provide active frontages and improved safety from overlooking
- E. Provide active frontages to streets, green spaces and parking courts
- F. Streets not roads - strengthen character and sense of place with memorable green spaces, focal points, and sense of enclosure
- G. Create a convenient interlinking network of safe and landscaped walking and cycling routes

Any significant proposals in both areas should be the subject of early consultation and local involvement to establish the brief and scope.

Kings Hedge's Estate



CGI Aerial over Kings Hedges Estate



4. Front elevation facing onto a green open space



5. Wide green verges near Nuns Way



6. Front Elevation of a typical Nuns Way facing on to a green open space

Routes & Destinations

Overall, the road network within the Design Code area is typically 'residential' in nature with a number of predominantly north-south 'main' roads providing a more strategic function in terms of providing access to the A14 to the north and central Cambridge to the south. These main links include Kings Hedges Road, Arbury Road, the B1049 Cambridge/Histon Road and Mere/Carlton Way and are characterised by public transport provision and on and off carriageway cycle lanes and footways.


Bar the 'main' links, the majority of the remaining street network comprises more lightly trafficked 'neighbourhood' roads, 'quiet streets' and 'residential cul-de-sacs'. These typically perform a 'residential' function, are more lightly trafficked and accommodate cycling movements on road with pedestrian footways provided adjacent to the carriageway. On-street parking is typically provided on these more lightly trafficked roads.

Poor connectivity

The large numbers of cul-de-sacs frequently lead to poor connectivity between neighbouring streets and to park spaces.

The layout of the Kingsway Flats blocks desirable east-west movement between Rosewood Road and Alex Wood Road and connections to Arbury town centre.

Where opportunities are identified to improve connectivity, this must be done prioritising walking and cycling.

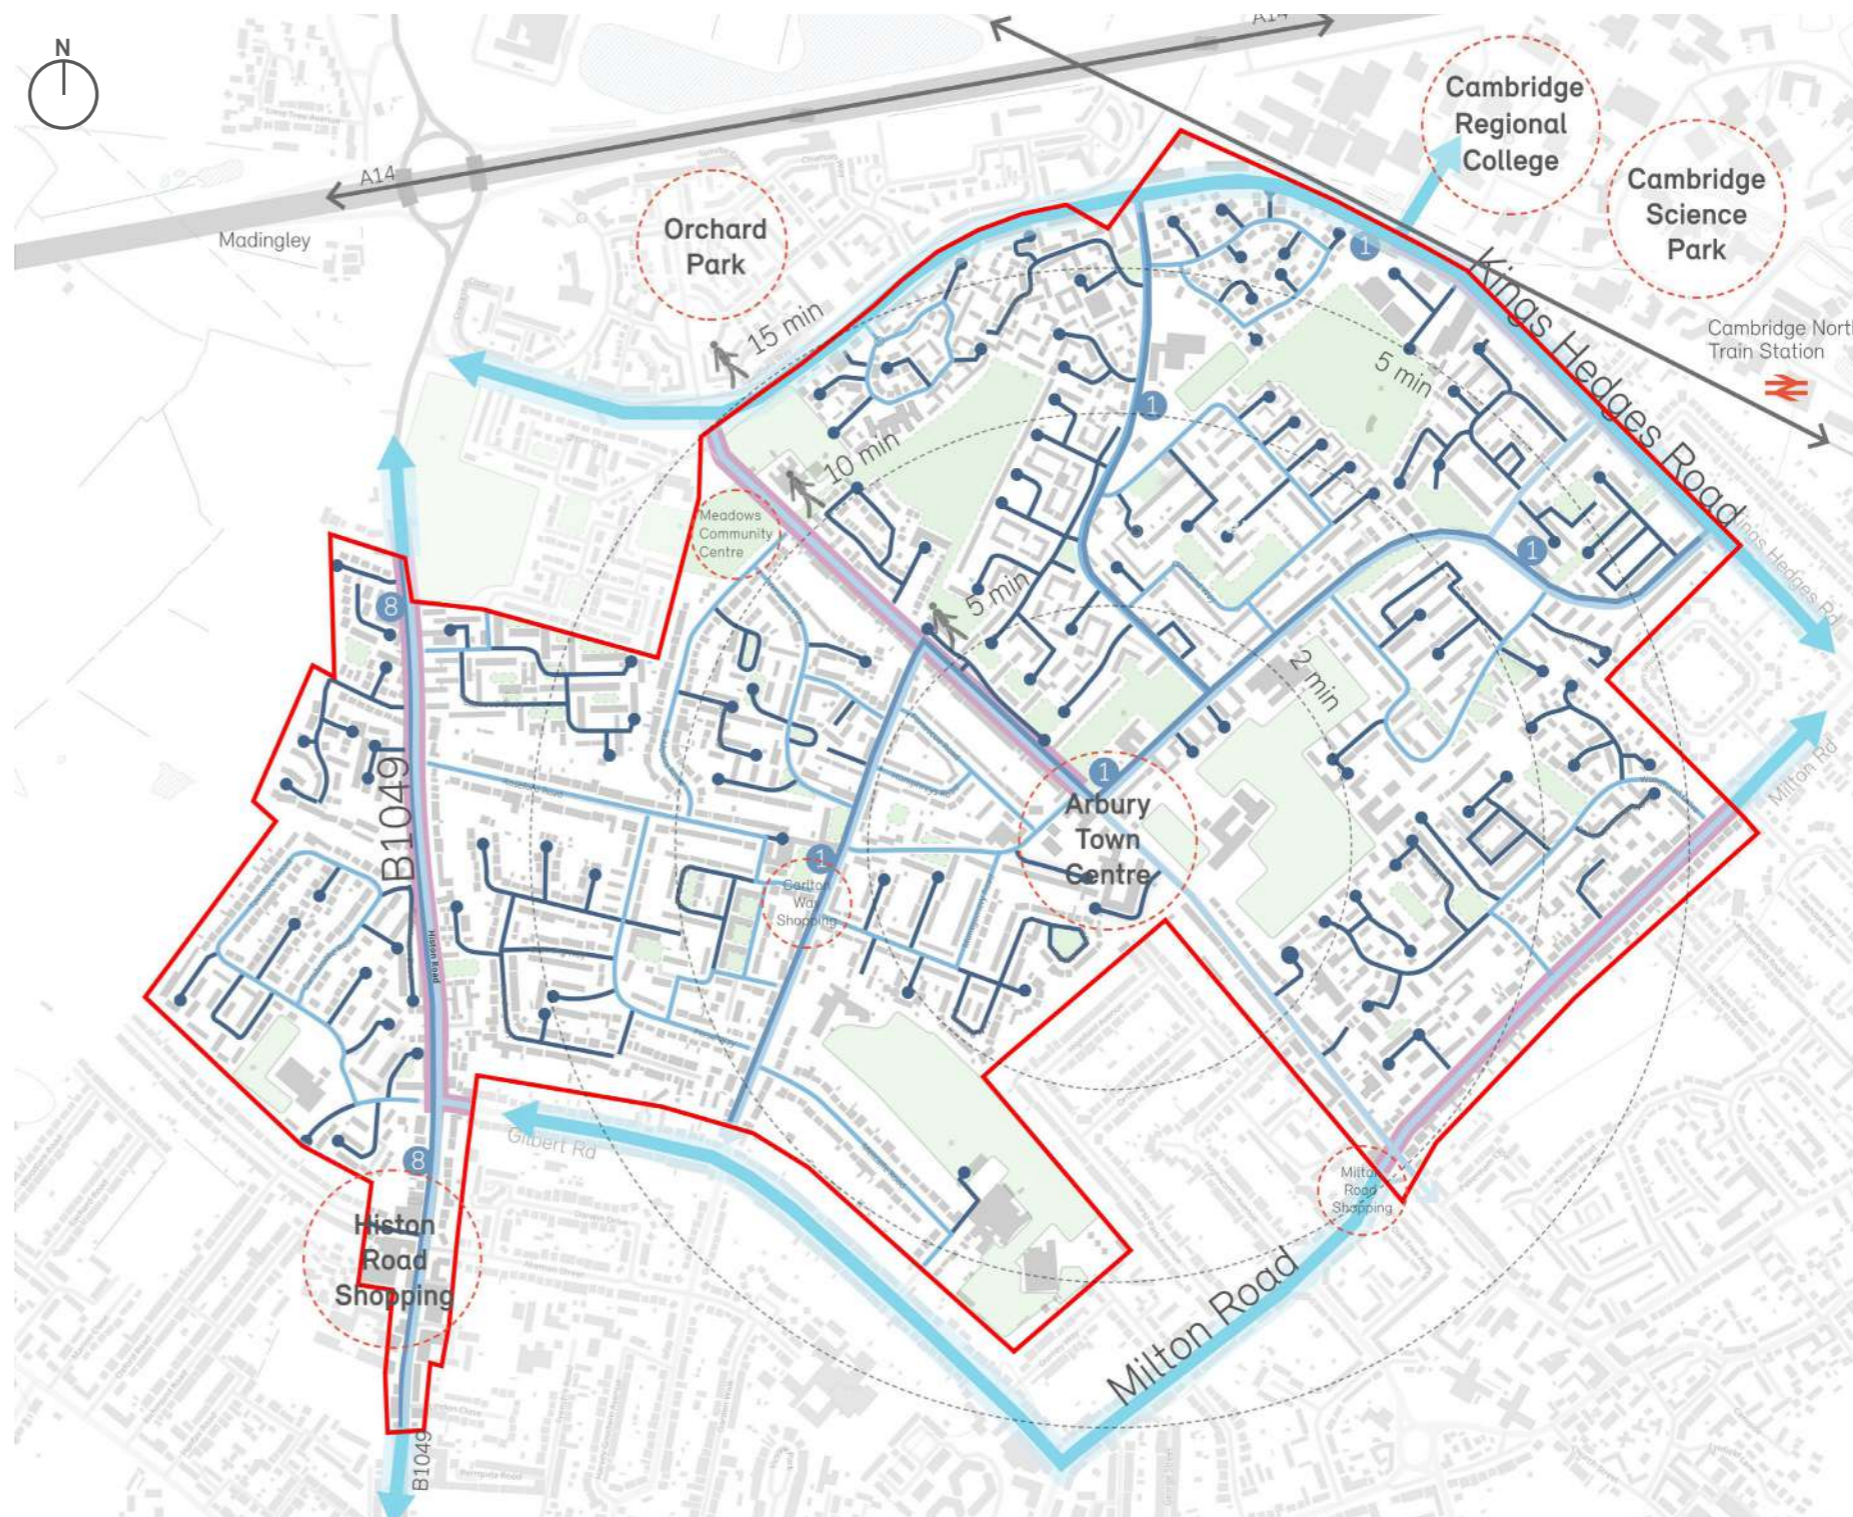

KEY

- Main roads
- Neighbourhood roads
- Quiet streets and informal cycle routes
- 8 Bus route and number
- Walking distances
- Formal dedicated cycle lanes
- Study Area

Sustainable Homes - EPC Ratings

A vital aspect of improving sustainability in the area is raising the energy efficiency of the existing buildings. Due to deprivation in the area, reducing heating bills and improving comfort, health and well-being within the home is particularly important.

The plan opposite indicates relative EPC ratings for homes in area, taken from recent census data, and illustrates the scale of the challenge facing many of the buildings. The dark pink areas show those parts where homes fall below the anticipated 2028 minimum "C" rating for all private rented homes. Areas of red show areas where homes are below the minimum "E" rating.

Building owners should be encouraged and assisted to improve energy performance, with a particular focus on buildings with ratings below "C". Energy efficiency improvements must reflect the requirements set out in Principle 5, governing for example appearance, and where possible take opportunities to deliver on other principles.

Where buildings with the poorest energy performance overlap with other challenges to delivering the code principles (such as poor existing urban design, weak movement networks, and lack of urban greening) this can be indicative of larger-scale problems to tackle than basic refurbishment can deliver. Where this is the case then both refurbishment, partial, and full new-development options must be explored and tested for their effectiveness in delivering local improvement based upon the 5 principles.



KEY

- Band - A-C
- Band - D-F
- Band - G
- Study Area




Tree Shading

Within the area set out by the Design Code, there is a deficit in tree shading, as shown in the adjacent map. Trees with large canopies will provide a greater degree of shading than trees with smaller canopies.

Tree shading is important for neighbourhoods because it offers a range of physical, ecological and social benefits. These include: street temperature regulation, air quality improvement, and the creation of wildlife habitat corridors. In short, tree shading contributes significantly to creating more liveable, sustainable, and enjoyable urban environments.

The “Make Spaces for Nature” section outlines how tree canopy can be enhanced across Arbury and Kings Hedges and help improve the community experience and climate resilience of the area.

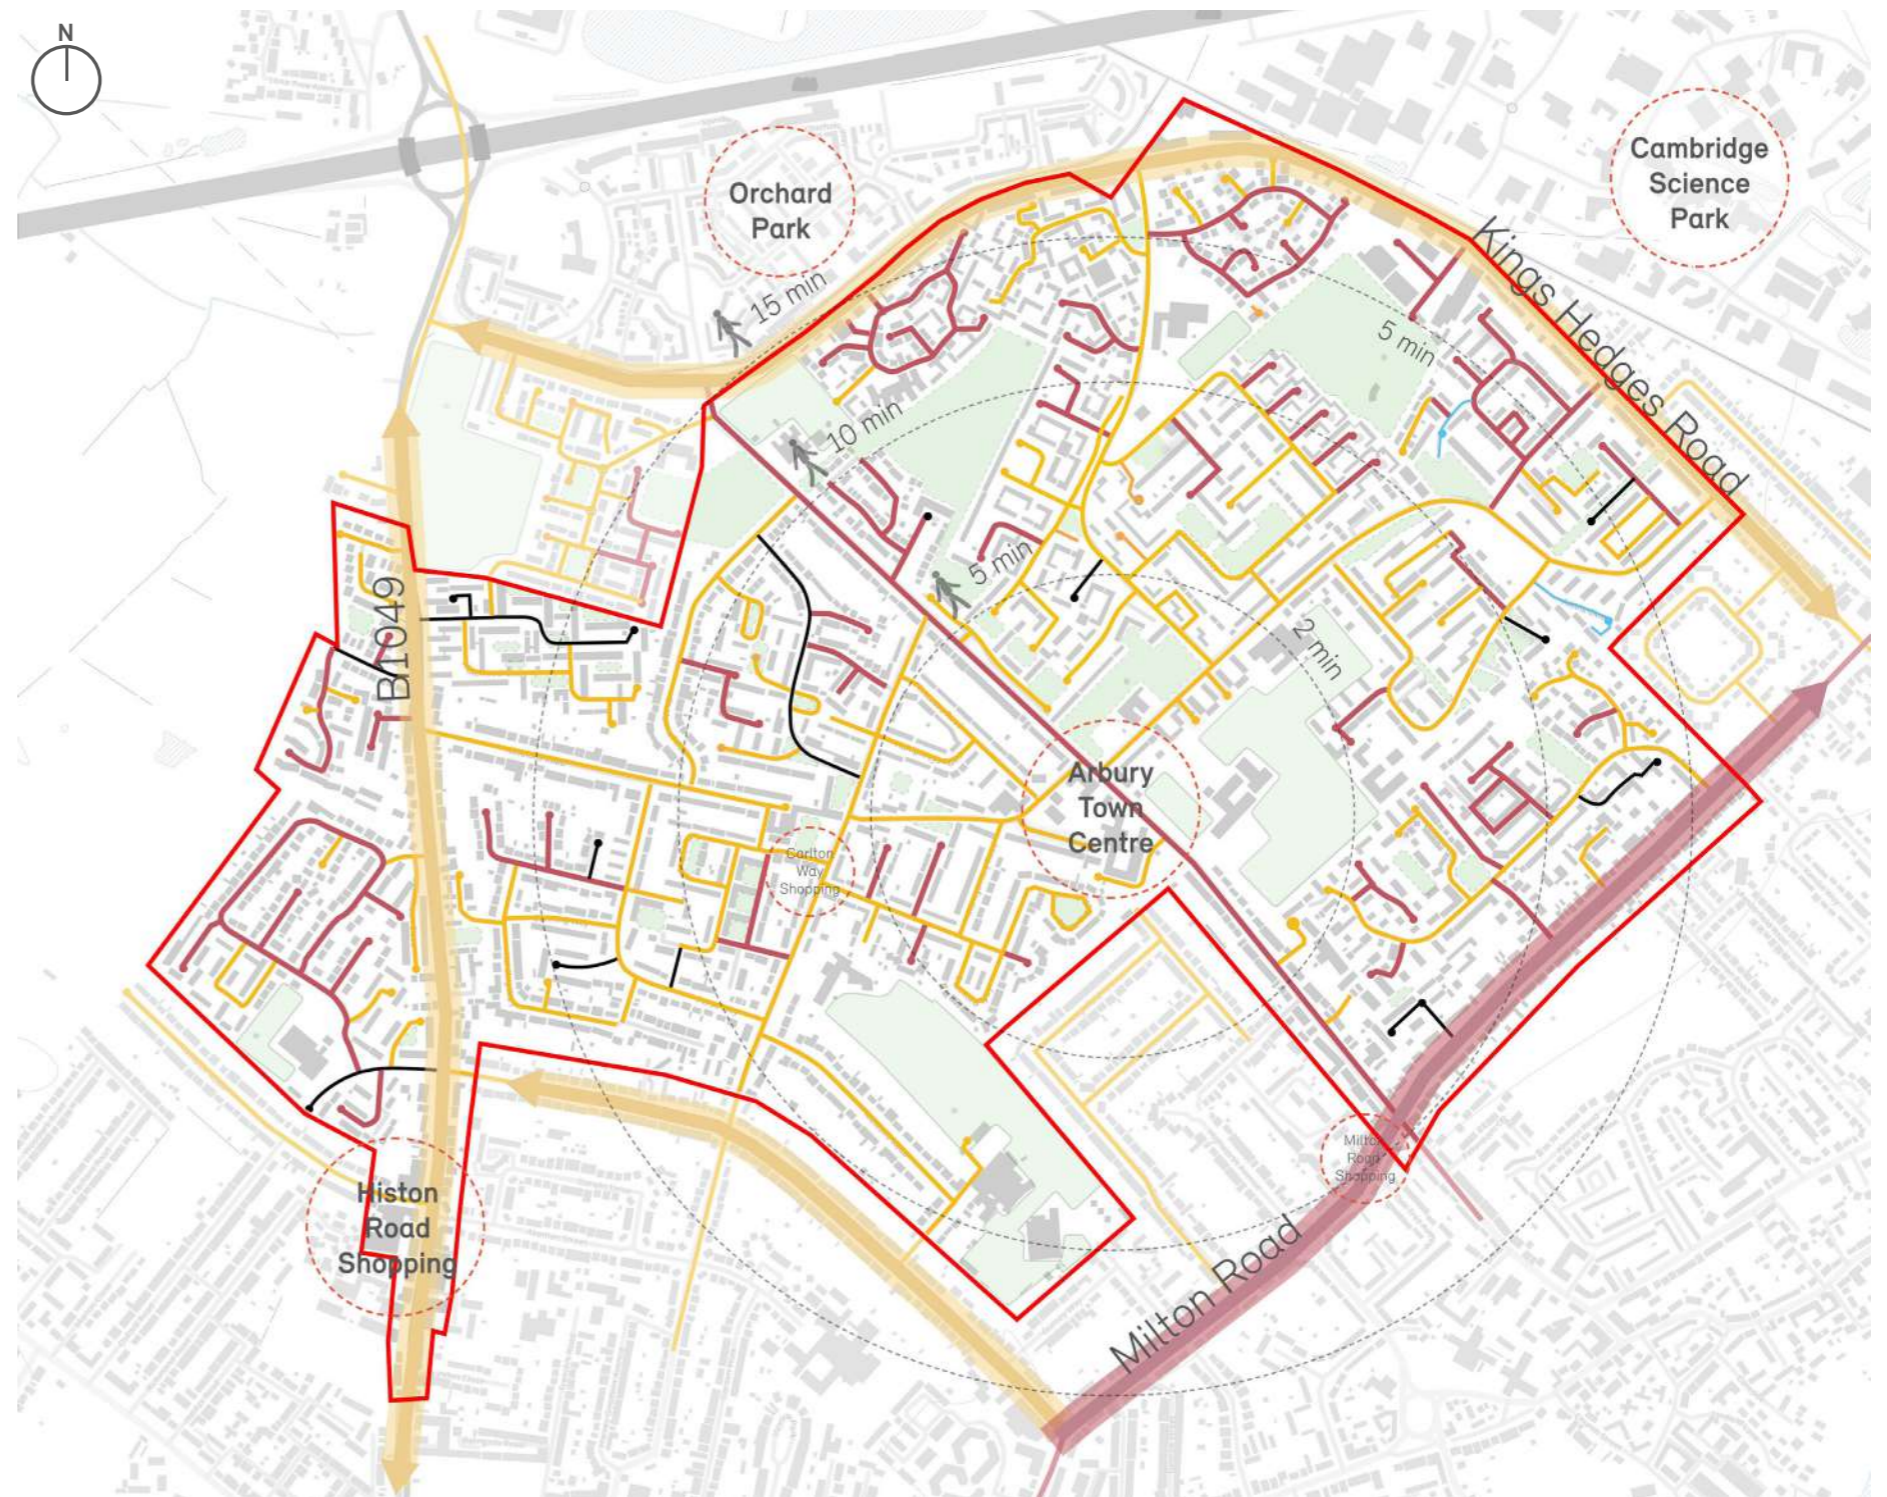

KEY

Shade provided (%)

●	0 - 20 %
●	20 - 40 %
●	40 - 60 %
●	60 - 80 %
●	80 - 100 %
—	Code boundary



Green Spaces and Landscapes

Within the area of the Design Code there is a range of existing green space, from small pocket parks, to large playing fields. Most of the green spaces are protected.


Parks and open green spaces play a crucial role in fostering healthy communities, promoting environmental sustainability, and enhancing the quality of life in urban areas.

However, because the parks and open spaces in this area are not easily accessible on the route networks, do not offer diversity or habitat, and have limited spaces for community activities, they are less well utilised than they could be.

The design code outlines how spaces can be revitalised to improve access, visibility, usability, safety, play, biodiversity and climate resilience. We emphasise the requirement for parks and open spaces to be integrated as parts of a thriving green network, with walking and cycling routes that can tie the area together through nature-based interventions.

It is anticipated that each green space can develop its own character to reflect its location, for example proximity of homes, or shops. This allows some for example to focus on providing play for all, while others can focus more on food growing or providing quiet natural oasis. What they need to share is all being safe, attractive and well connected to the walking and cycling network.

The area is identified as being located in Flood Zone 1, meaning that direct flooding from rivers is unlikely. However wet spots from surface water flooding have been identified, reinforcing the importance of incorporating effective SUDs planning as part of future proposals.

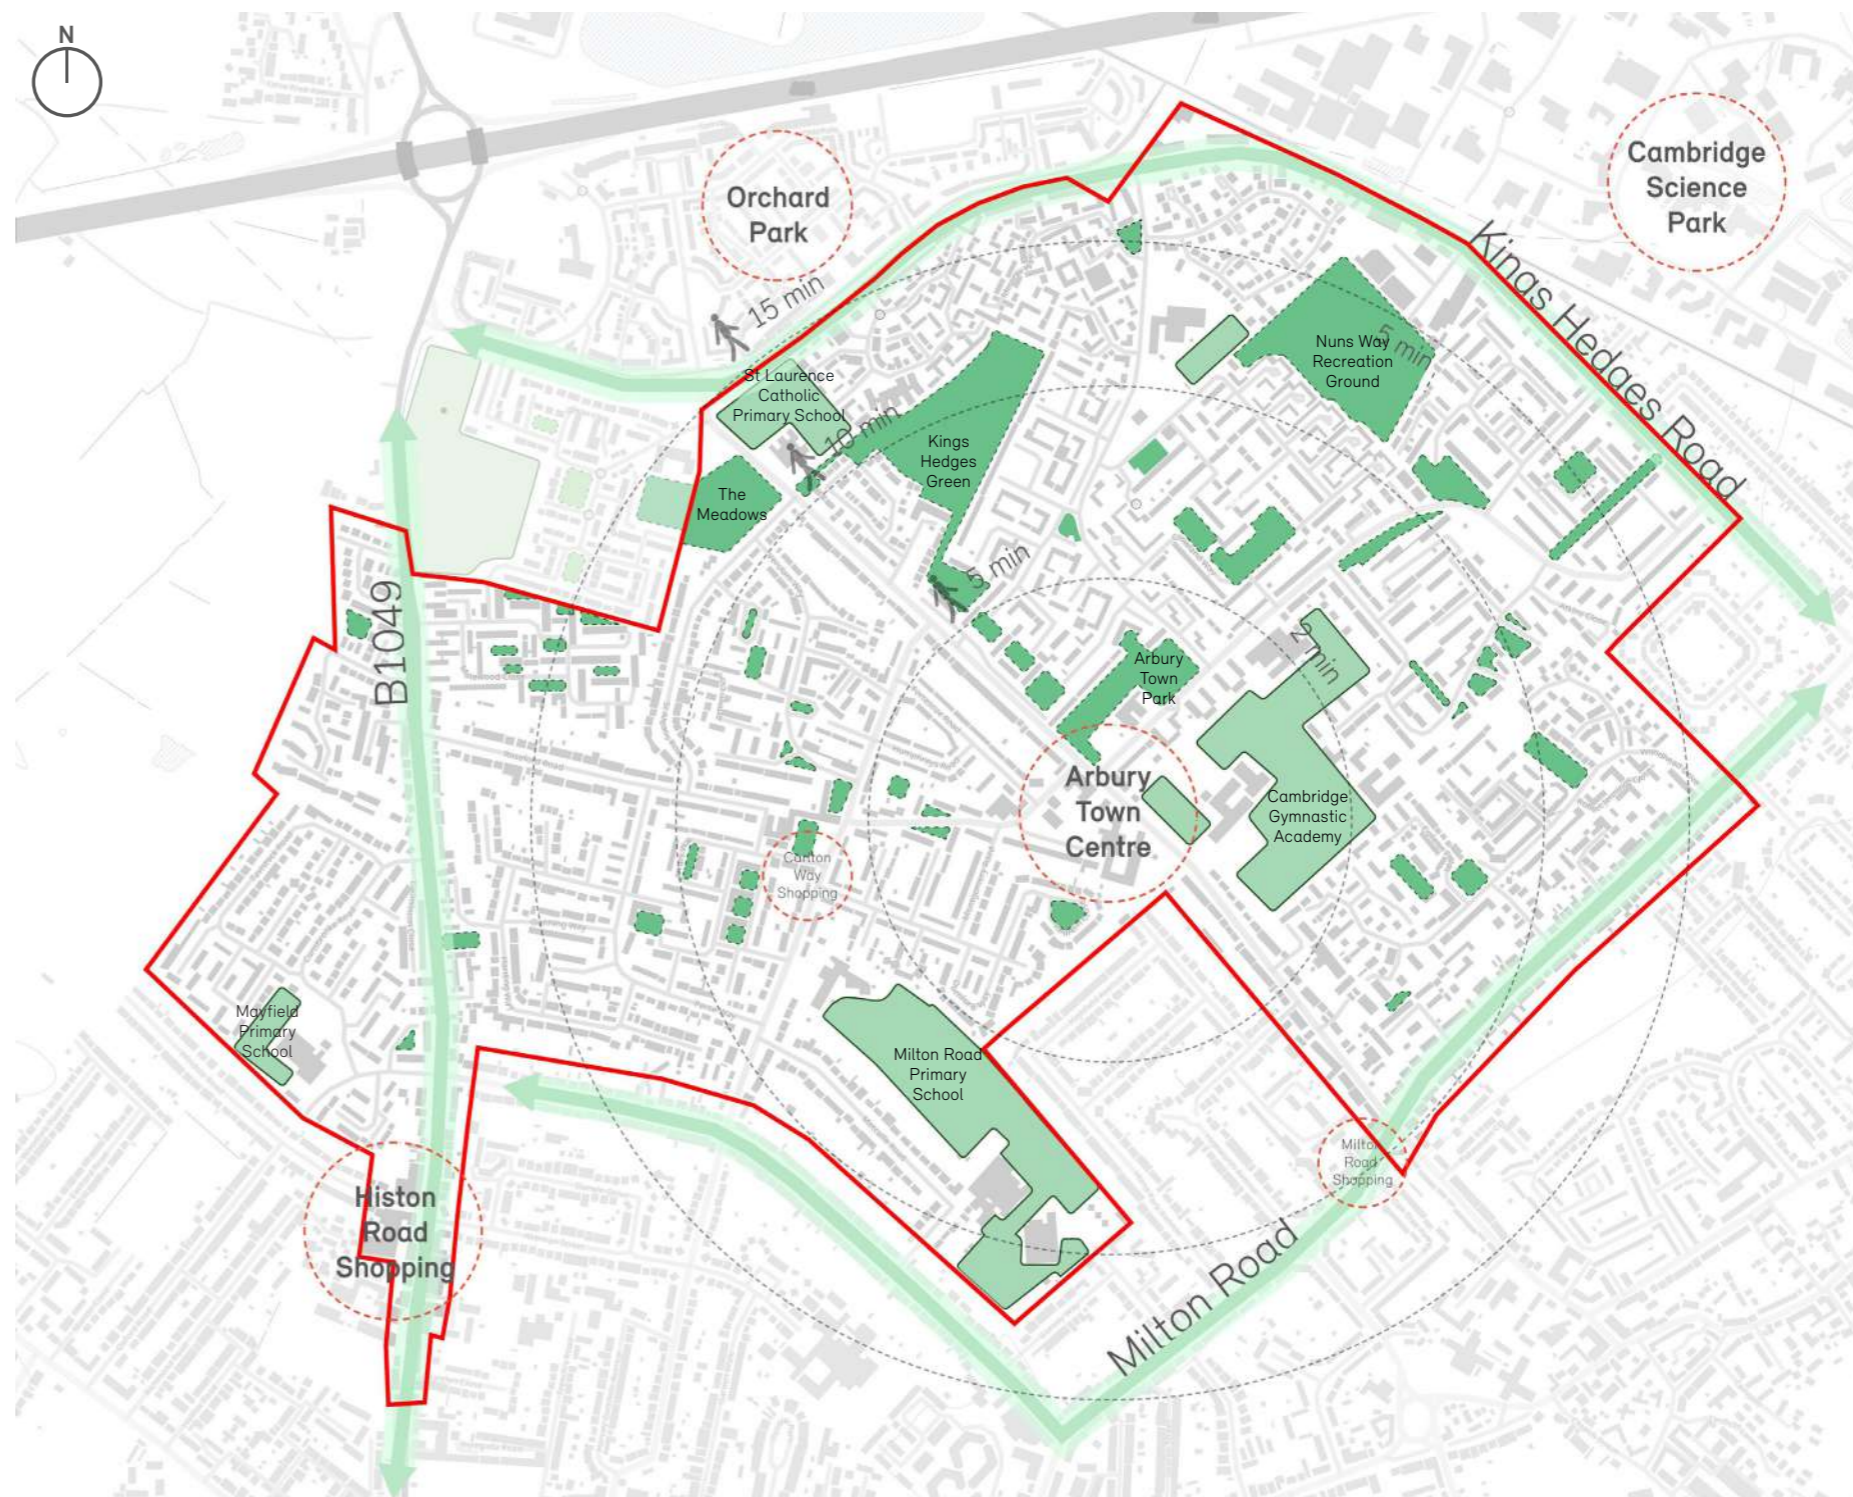

KEY

- Protected green spaces
- Publicly inaccessible green space
- Code boundary



Opportunities Framework

"The more you look at the place, the more you can see that you can improve."






Resident commenting during workshop 2



Key spaces and focal points in the area offer significant opportunities for enhancement. As part of Next Steps, these should be explored through strategic plan making in close consultation with the local community.

We have highlighted some of these areas on the Opportunities Framework. These may include combinations of:

- Energy/design improvements to homes and buildings
- Enhanced community buildings/facilities
- Tree planting to improve tree canopy cover
- Better connectivity for walking and cycling to nearby colleges, transport and facilities

KEY

-  Priority improvements for walking and cycling to connect across the area
-  Access, play and building frontage improvements to Kings Hedges Park
-  Improved access, frontages and walking and cycling links between Nuns Way and the recreation ground, college and science park
-  Tree planting and environmental improvements with potential for more mixed uses in the centre
-  Town centre environmental improvements to support central local character. Public realm improvements help bring together the mix of shops, religious and community, health, education uses and homes.

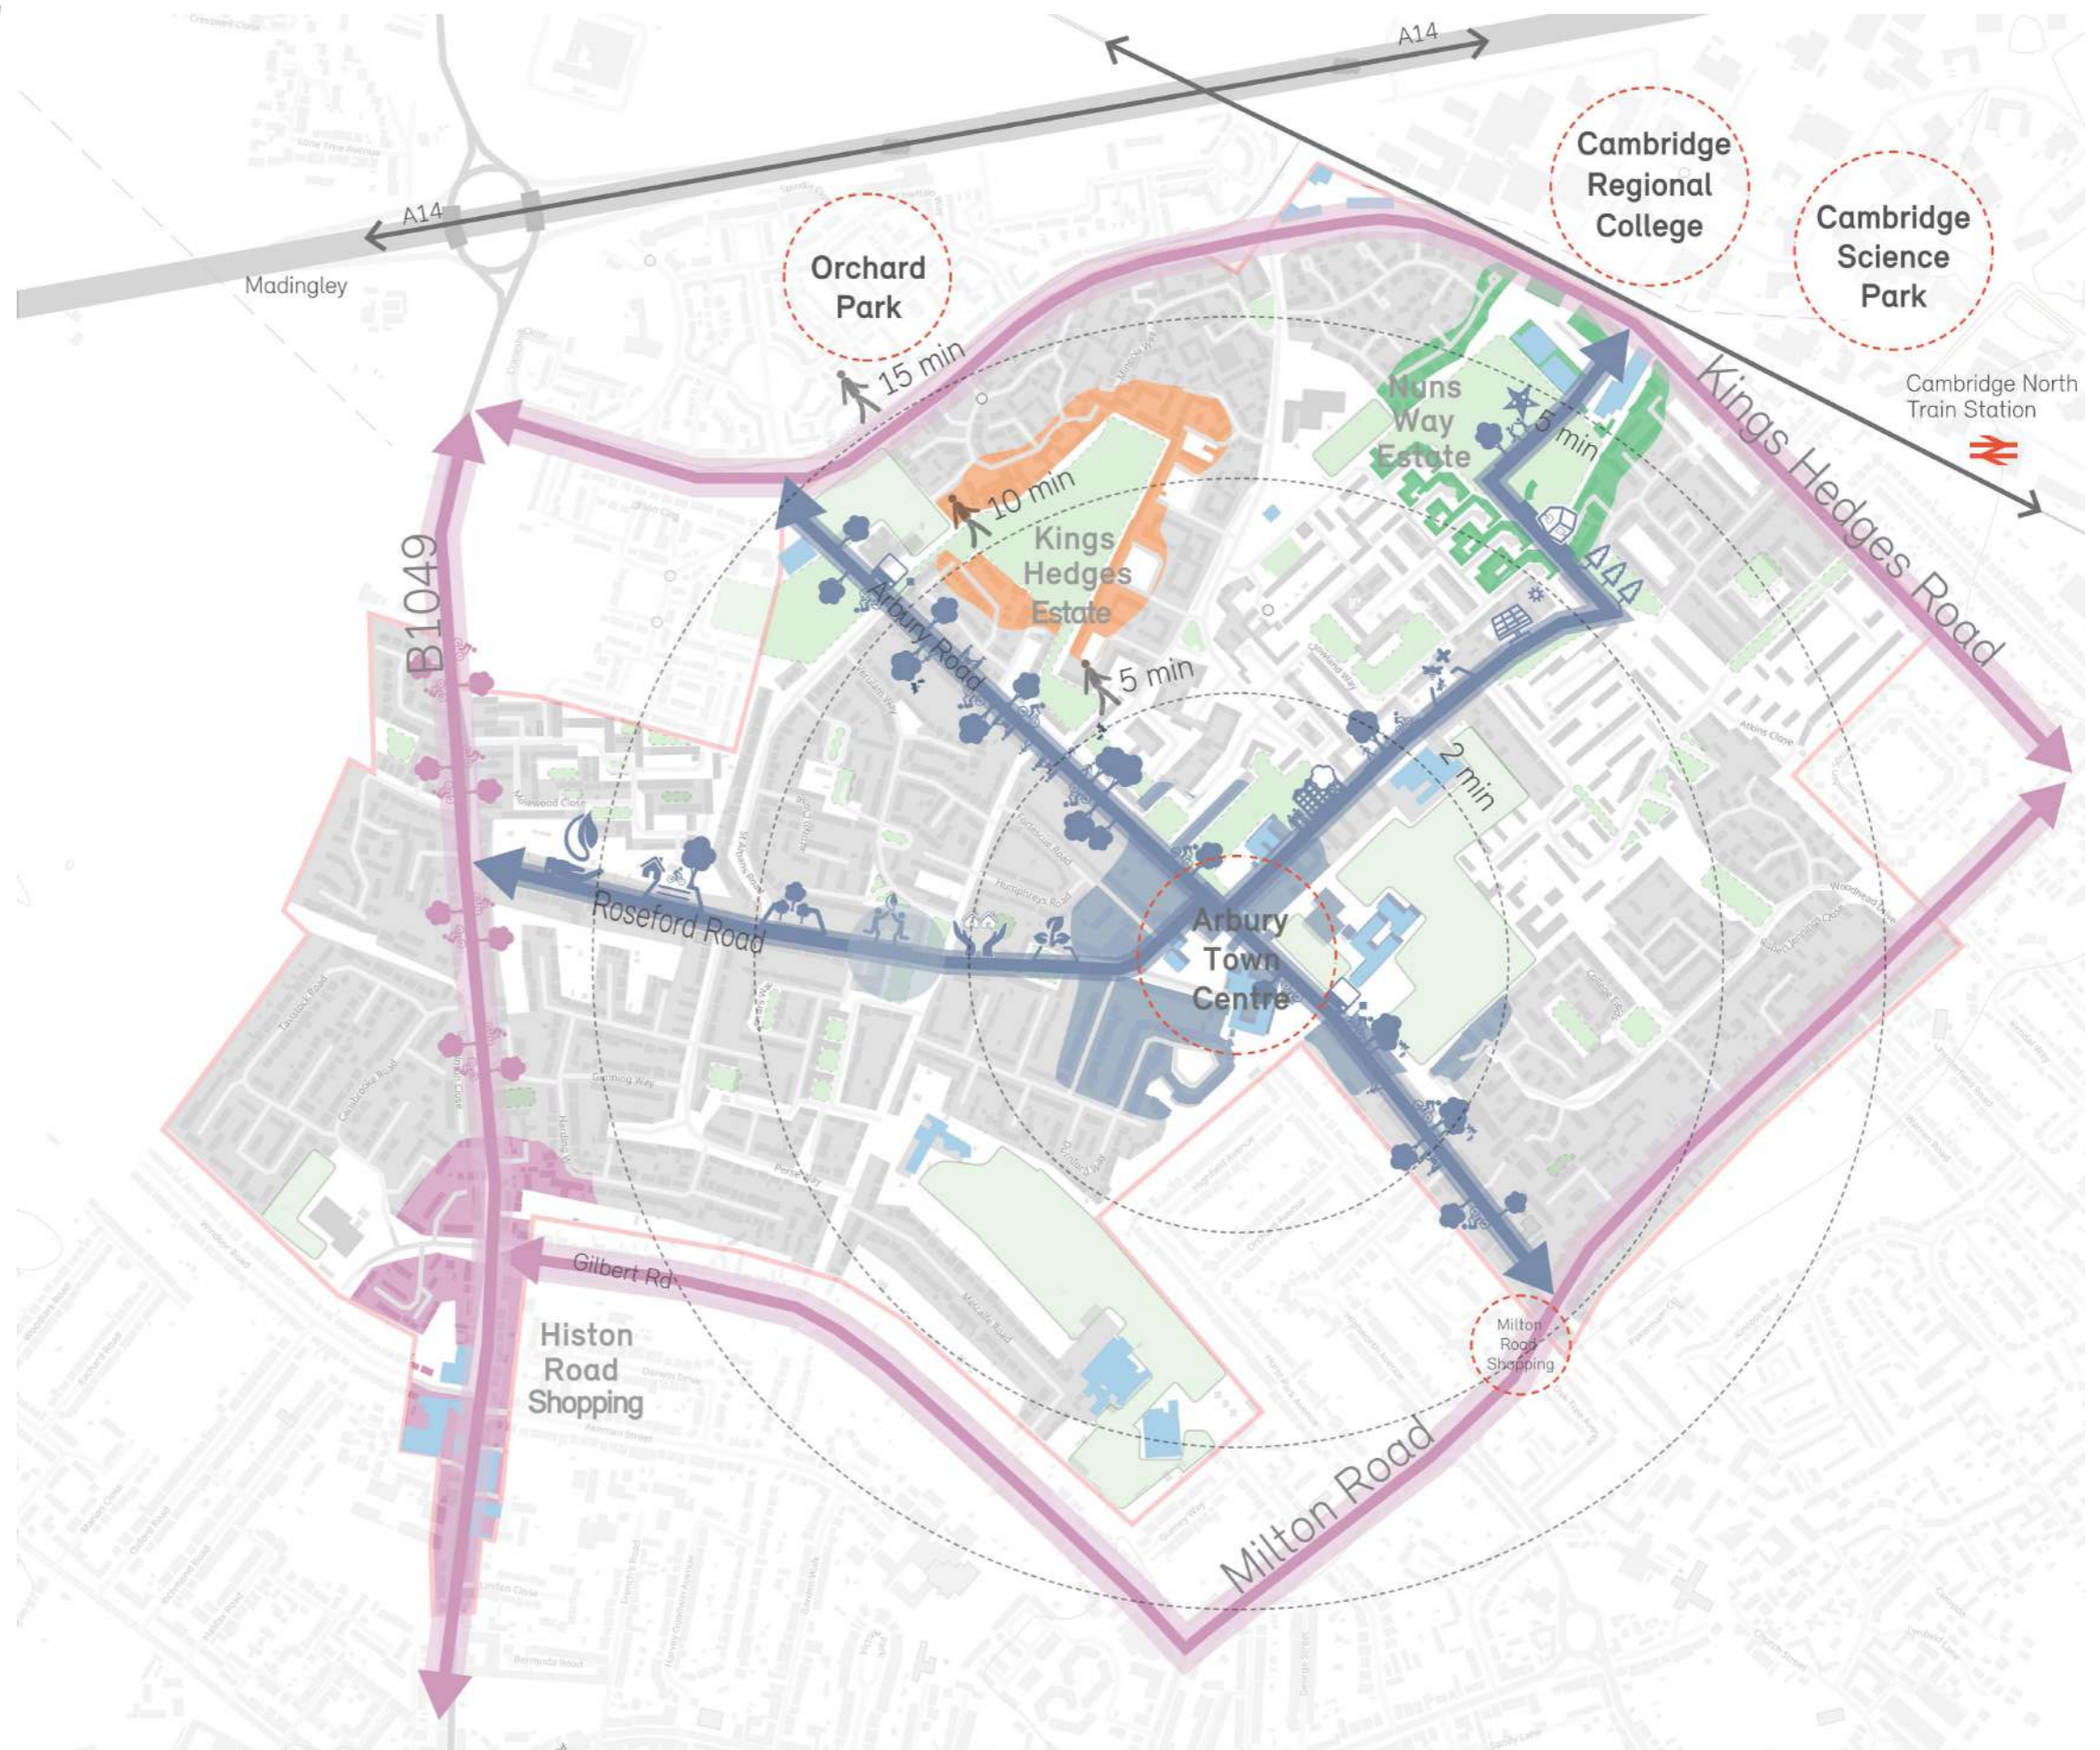

The Five Principles

The Code

We have structured the document under the headings of Five Principles. They have been chosen to be memorable and to have an easily understood focus. Each principle includes a range of technical design guidance indicating how the principles can be delivered, how principles can work together, and where appropriate include key targets

The principles emerged through engagement with residents are listed to reflect the order of priorities that were expressed at the time.

Principle 1 - Make space for Nature

Incorporating nature is critical to delivering the priority of climate resilient sustainable communities and nurturing meaningful connections with the environment.

The components of nature need to be integrated as a network of natural spaces, sustainable drainage, and tree planting, to deliver an increased quality of life and improved micro-climate.

Principle 2 - Prioritise walking and cycling

Create a safe joined-up network for walking and cycling routes that can be combined with green space, trees and nature. Cycle ownership and use is very high in the neighbourhoods and one of the highest priorities for residents is a safer and better connected cycling and walking network for local trips.

Principle 3 – Thriving Public Spaces

Public space matters, and can range from local centres to a shared garden, small square or quiet street. Spaces need to feel safe by being visible and bring people, activities and nature together into attractive places.

Local centres need combined and multiple uses to help support them, including places to play, shop, work, worship, learn and live – and be well connected by the route network to surrounding neighbourhoods.

Principle 4 – Enhance Character

Residents want to strengthen the green character of the area, which is combined with a varied but gentle building scale. New developments need to work with the local scale of buildings and contribute safe, sociable streets and spaces, with focal points and memorable but harmonious buildings in key places. New developments and s106 contributions must be harnessed to benefit the local area, with the existing local environment invested in and seeing improvement when there is new construction.

Principle 5 – Increase Sustainability

Take opportunities to reduce energy use and carbon emissions, generate clean energy, and improve health and well-being for residents – both at home and around the neighbourhood.

When designing new developments plan to reduce whole life carbon by improving and reusing existing buildings, recycling elements, and using low carbon renewable materials.

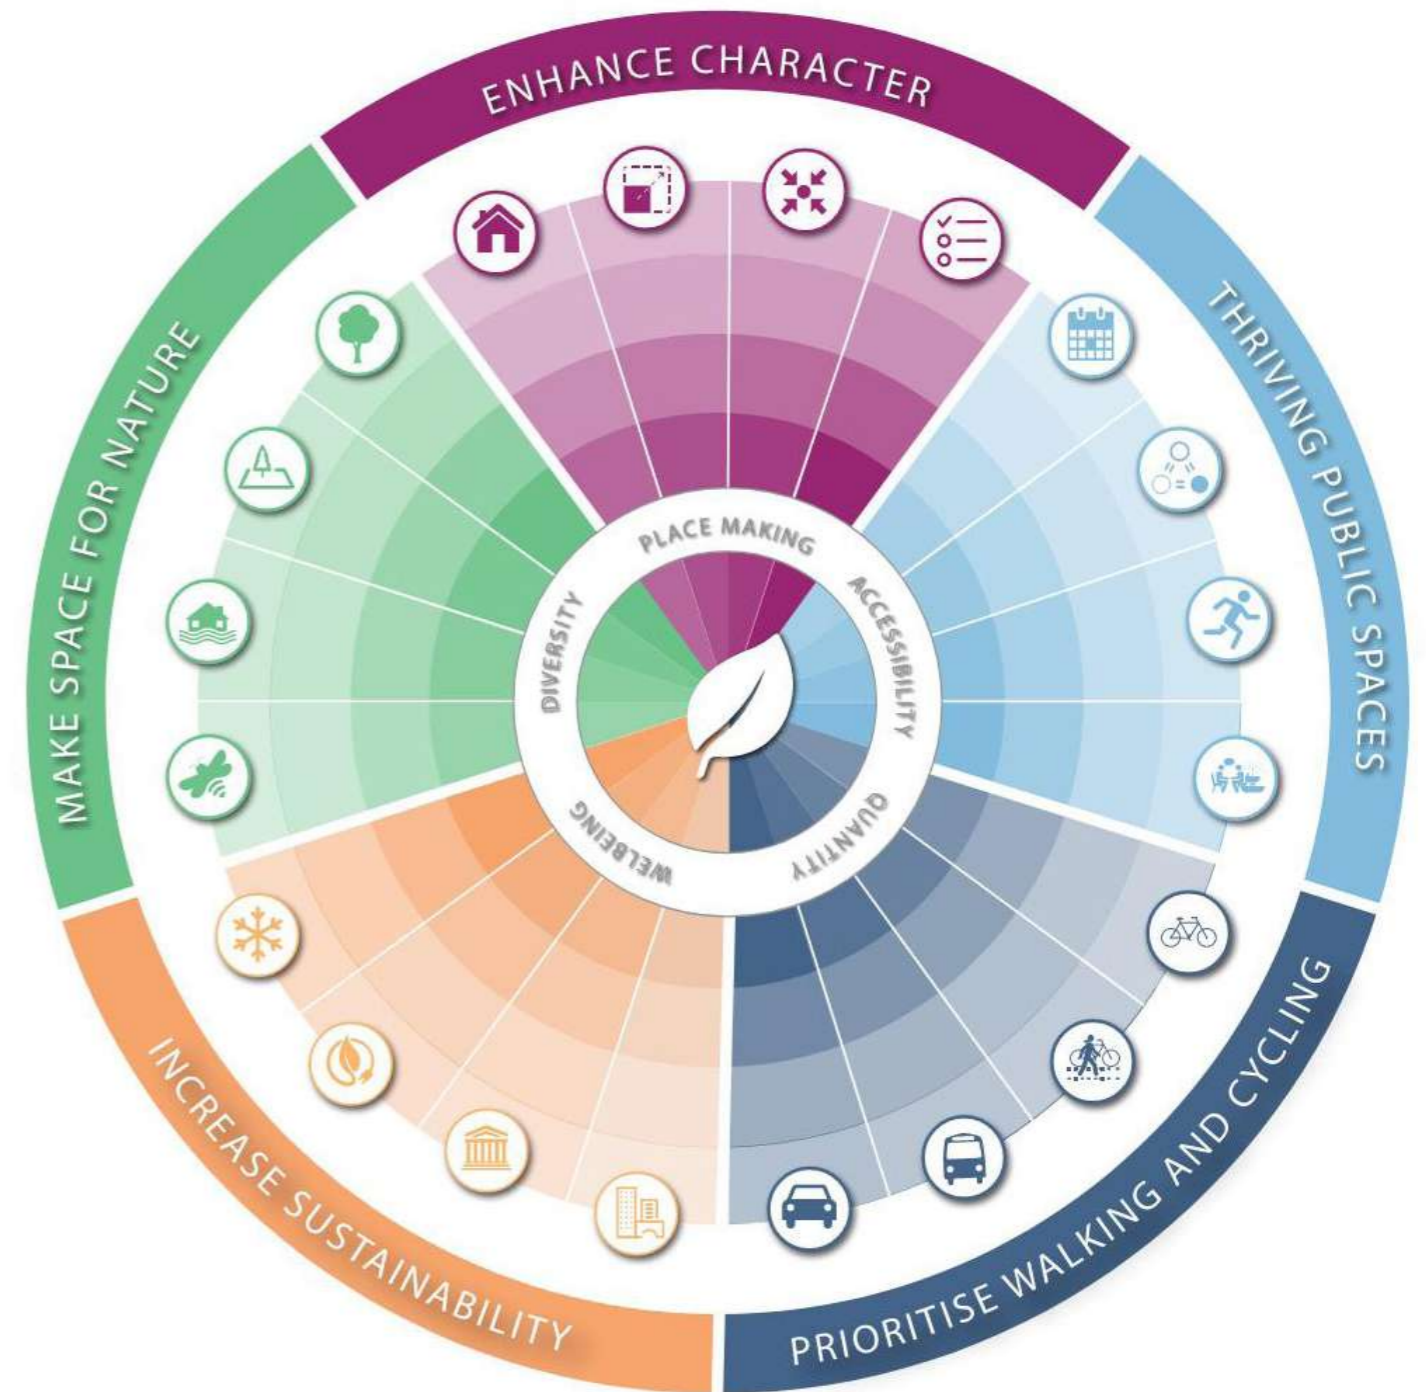


Diagram of the 5 principles

1 Make Space for Nature

Incorporating nature is critical to the delivering the priority of climate resilient sustainable communities and nurturing meaningful connections with the environment.

The components of nature need to be integrated as a network of natural spaces, sustainable drainage, and tree planting, to deliver an increased quality of life and improved microclimate.

"Make a place for people to relax when they're down or tired"
 Grove Primary School Student

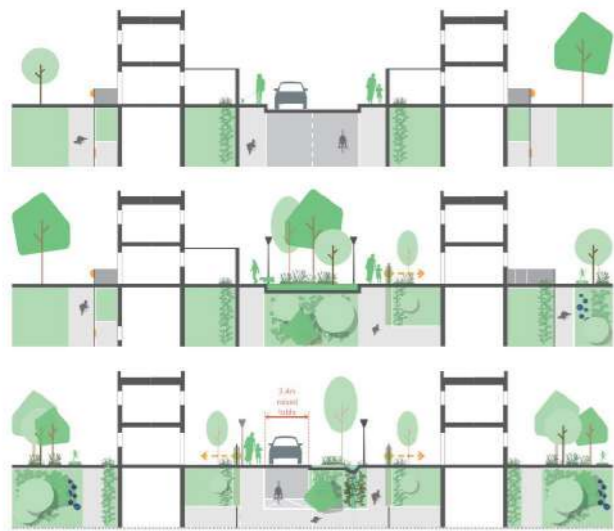


Image shows hypothetical street scene only to illustrate design requirements

Greening Opportunities





The plan opposite identifies the major green spaces in the area, and the opportunities to link these into a thriving green network, with living infrastructure greening the streets that connect between them.




Apply the principles of the code to improve access, usability, safety, biodiversity and climate resilience within each of the green spaces.



Street greening: tackle poor street environments with combined tree planting, traffic restrictions and creation of front gardens

KEY

-  Protected open spaces
-  Greening for major routes
-  Priority streets for tree canopy enhancement
-  Code area boundary

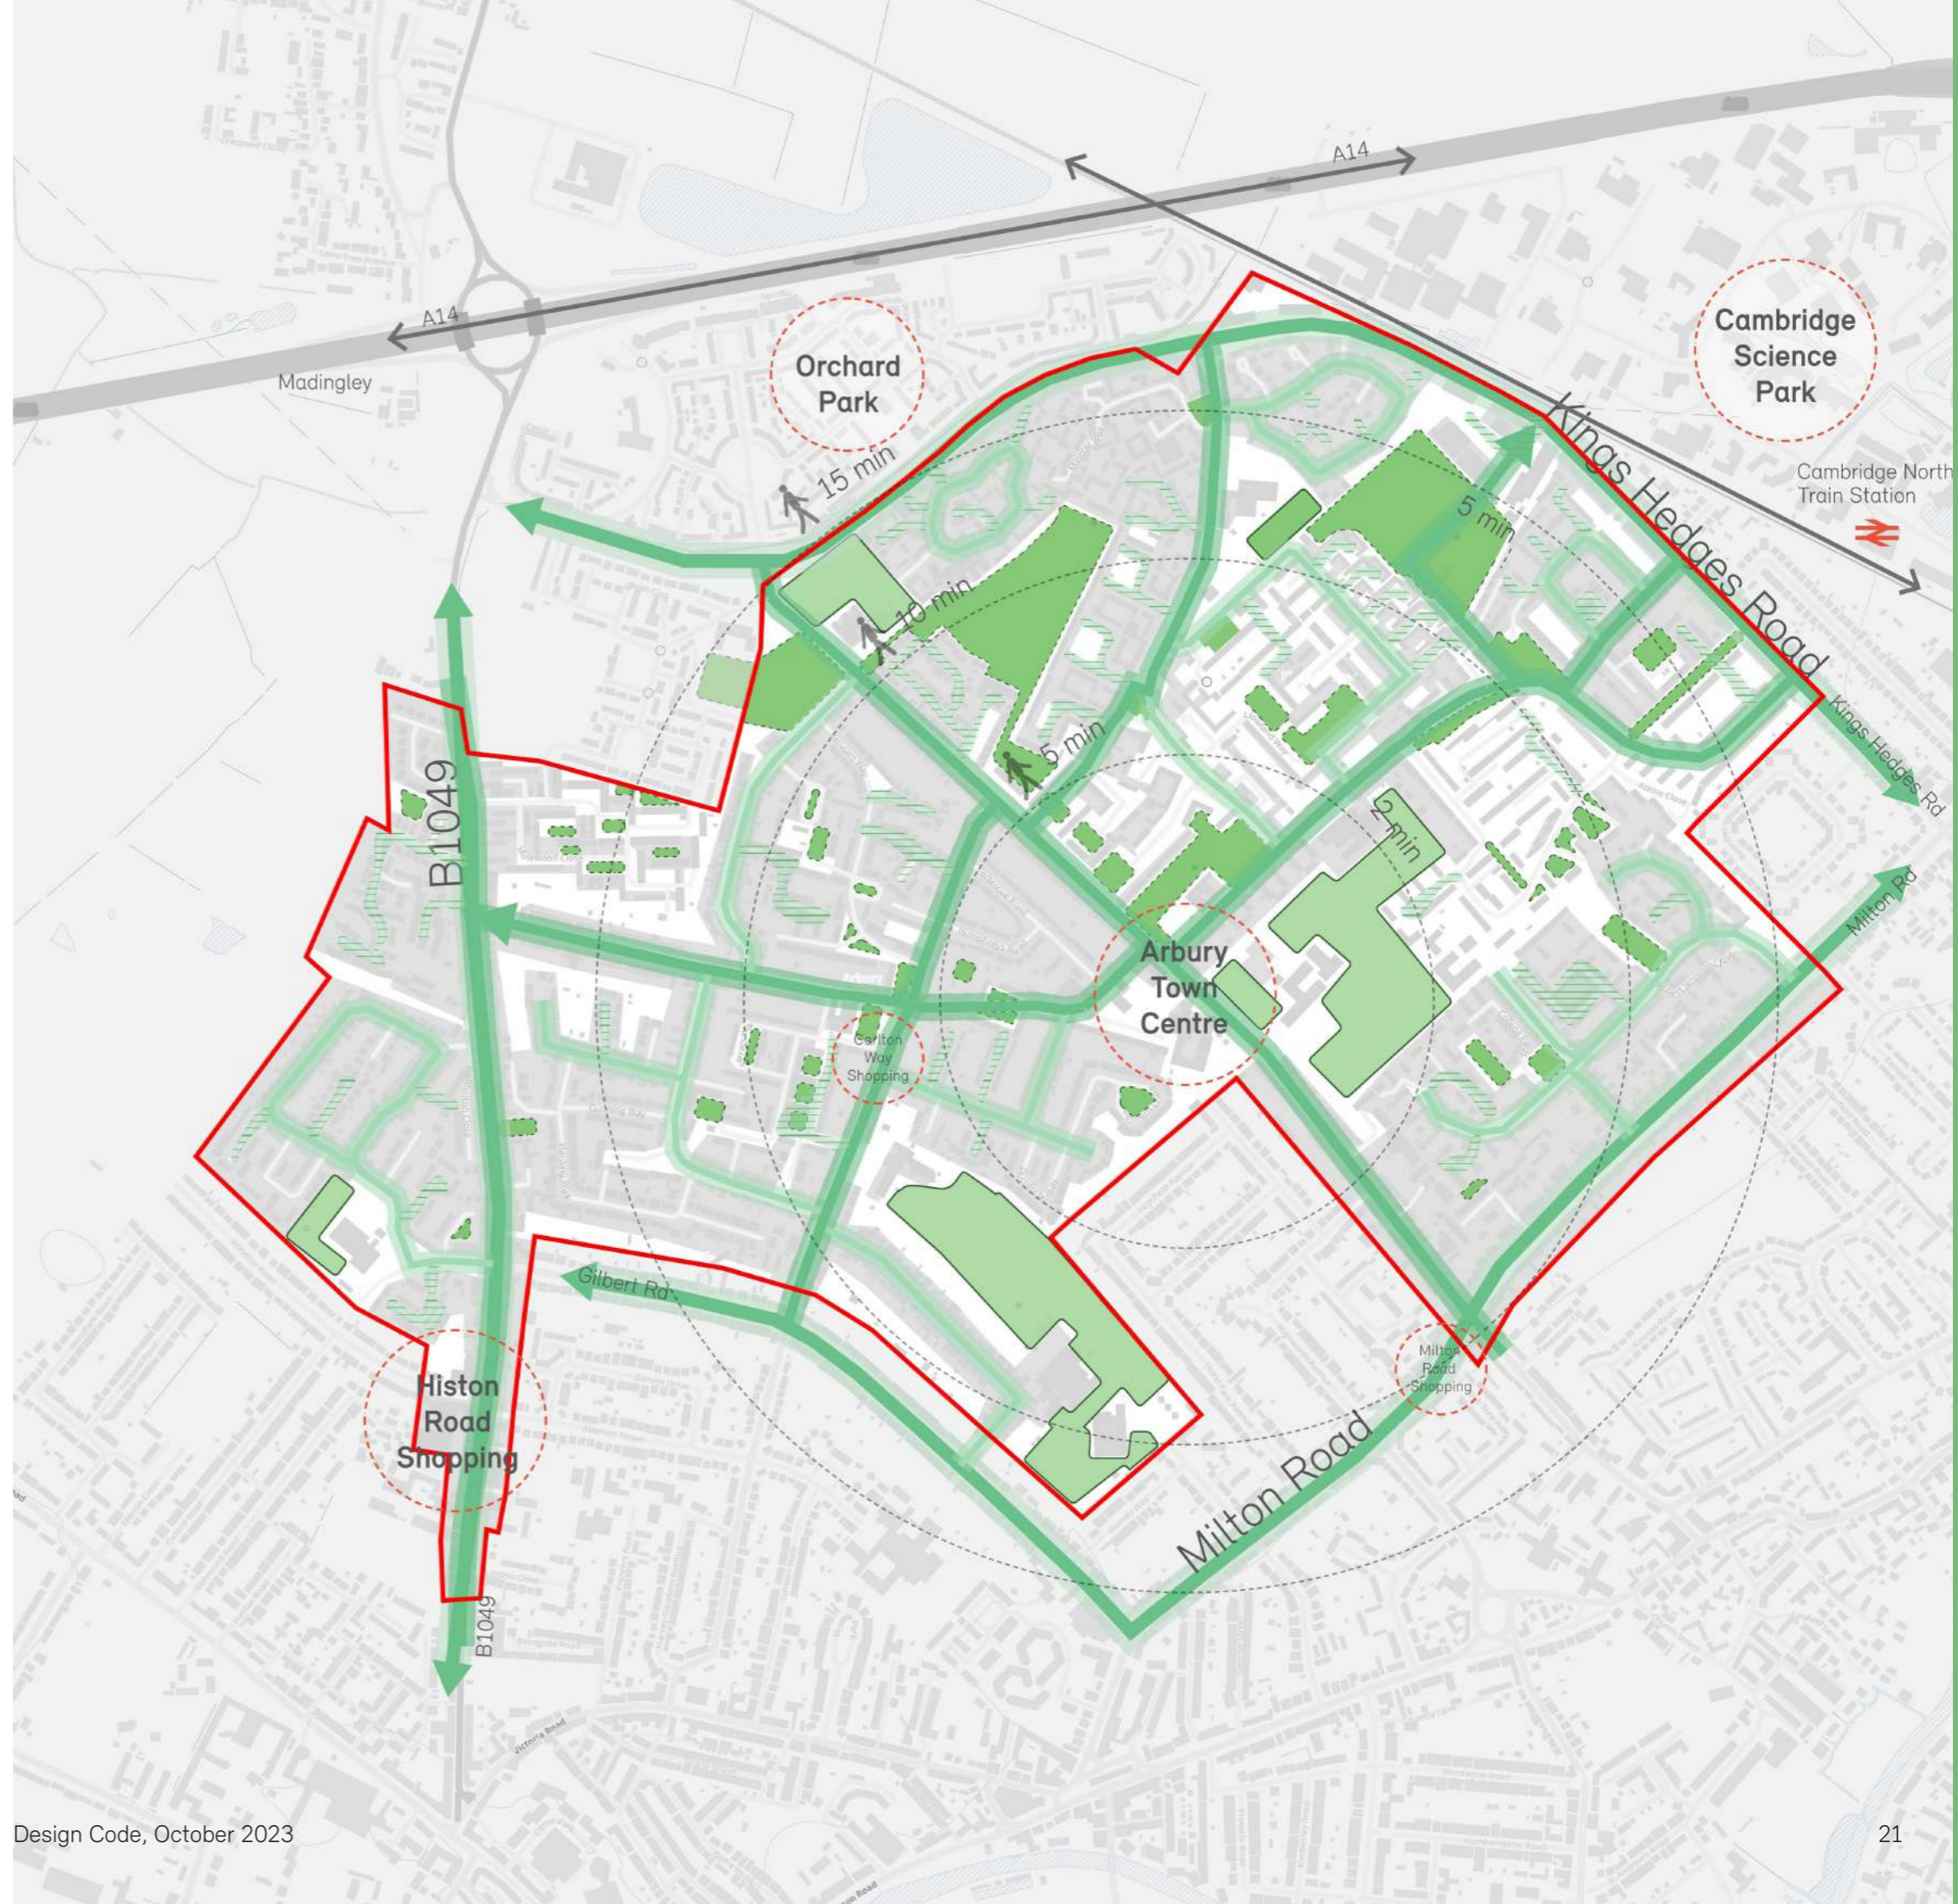

Urban Greening

"Increased green space means cleaner air in the long run. Good for physical and mental health."

Resident survey comment

What is it and Why is it Important

Trees and other planting need to be aligned with movement networks to keep routes attractive and shady on hot days. Green corridors can positively contribute to human health by improving the microclimate to reduce heat stress and exposure to harmful UV radiation.

Must:

- Canopy cover and hedge planting must be increased in local streets, as well as in open space and parks (Policy 71).
- To provide long term protection to the area's tree cover a selection of biodiverse species must be chosen when planting new trees. This will help ensure climate resilience, robustness and disease resistance.
- The procedures to protect existing trees on local authority land should be easily accessible and readily understood by community members.
- New developments must consider how shading will be incorporated at the early stages of design, and green roofs must be maximised on flat roofs (10 degree pitch or under) wherever possible (Policy 31f).

Should:

- To help reduce the urban heat island effect street trees should be planted at ten metre centres to achieve combined canopy cover over time (Policy 71c).
- Green roofs should be included on public buildings and homes, cycle storage units, garages, bus stops, and other buildings in the area.
- Creation of tree canopy should be achieved with clear views at ground level for visual openness, safety and security.

Resources

- Forest Research - Urban Tree Manual (2018)
- Natural England - Green Infrastructure Framework (2023)
- Trees for Streets Scheme
- TDAG - Tree Species Selection for Green Infrastructure: A Guide for Specifiers (2019)
- The AA - Tree Preservation Orders Guidance
- The GRO Code of Best Practise (2023)




Safeguarding for local large trees ensuring protection from disease and improve climate resilience



Reduction in the urban heat island effect through street trees planted every 10 metres where possible



Illustrative diagram showing urban greening principles

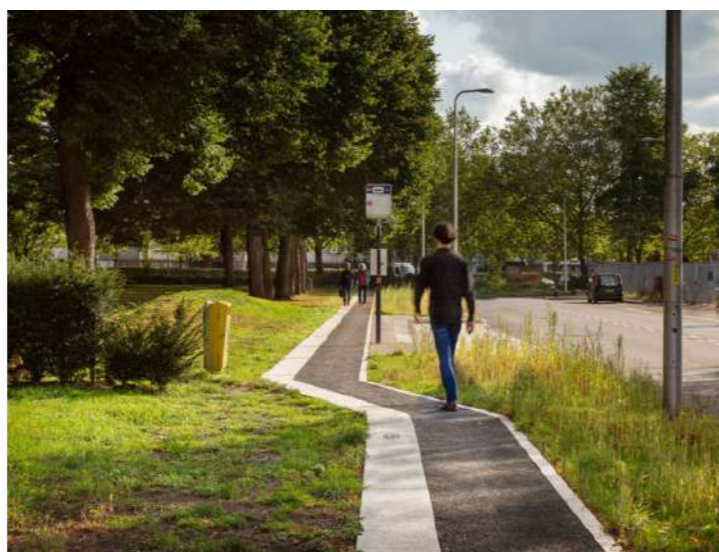

Broad leaf trees and a vegetative buffer provide shade, protection and biodiversity along a residential street



Biodiverse Green Roof - House Pibo, OYO



Involve the community in tree planting schemes

Nature Conservaton

"Mandate the inclusion of habitats for wildlife in the design code, bat boxes. This is low cost, low maintenance and has a positive environmental impact."
Resident survey comment

What is it and Why is it Important

Through a comprehensive nature conservation approach, landscape can be enhanced for all life across the area. Natural assets and habitats that already exist should be protected, maintained and enhanced.

Must:

- New developments must meet Biodiversity Net Gain improvements at a minimum of 10% (Greater Cambridge Shared Planning Biodiversity SPD, adopted in February 2022). If this is not possible within the site, this must be allocated within the design code neighbourhood, before being placed in wider habitat banks in Cambridge.
- If protected space is allocated for re-development for better placemaking, natural surveillance, good pedestrian and cycle connectivity, should there be a need for some development on protected open space, the same size and scale of land must be reprovided for within the boundaries of the design code (see p.6), preferably within walking distance of the existing site (Policy 67).
- In new developments habitats of existing species must be enhanced rather than removed (Policy 59c & 69c). Ensure habitats are created, linked and managed wherever possible.

Should:

- Target 20% of locally delivered biodiversity net gain, particularly for larger developments
- Seek to provide regional management practices of the Cambridgeshire's 'fen edge chalkland' to ensure the continuation of long standing local habitats. For example bovine grazing, hedge-laying, creating pocket woodland and re-naturalising culverted waterways.
- Connective hedges should include native species such as Crataegus monogyna (Hawthorn), Prunus spinosa (Blackthorn), and Corylus avellana (Hazel). These can be coppiced and managed seasonally by the local community, with support from local officers.

Resources

- Cambridge City Council - Biodiversity Strategy (2022)
- Cambridge Nature Network - Habitat Bank
- Earthwatch - Tiny Forest
- NBN Trust - National Biodiversity Network Atlas
- UK Gov - Nature Recovery Network
- Woodland Trust - MORE hedges Scheme



Target 20% Biodiversity Net Gain to be delivered locally, particularly for larger developments.



Seek to Enhance habitats of existing species by incorporating bee bricks, bat boxes and bug hotels



Illustrative diagram showing nature conservation principles



Incorporate homes for animals - detail of child's bird feeder design
Design Code, October 2023



Hedgehog highway through fences and back gardens



Specify species rich planting

Living Landscapes

"Benches and perennial planting or beds of flowers would make the space feel loved and nurtured and if the local community used the space to grow vegetables."
Resident survey comment



Use living spaces help bring people together through play, social meeting, food growing resting, and being in nature



Work with local people to create and care for spaces for the community to enjoy and share

What is it and Why is it Important

Living Landscapes can create sensory experiences in public and shared spaces by providing biodiverse planting alongside spaces for the community to gather, grow food and enjoy natural spaces to stop and rest.

Must:

- Improvement works to community amenity centres, such as Arbury town centre, must include accessible places to stop and rest amongst planting that is appropriate to both the scale of buildings and space (Policy 56i & 59). For example benches nestled in biodiverse planting, which are shaded by broad leaf tree species, supports the everyday integration of nature and social well-being.
- Accessible and safe places to grow food must be provided for in larger new developments, for the local community to steward and enjoy. This is flexible and can include community orchards, community gardens & collective vegetable plots (Policy 31b).
- Landscape and green infrastructure must be designed with minimal maintenance requirements. When maintenance is required it must be achievable for local residents to carry out, and contribute to a no net loss in biodiversity (Policy 59: 7.15).

Should:

- Climate resilient planting interventions should provide year round sensory stimulation with vibrant colour and texture choice (Policy 59h). For example - spring bulbs, summer grasses, autumnal flowering communities, and shrubs with winter interest.
- Community growing spaces should be accessible, manageable and cooperative. In new developments size should be considered, with pocket spaces often preferable for residents, than large sites, which can be difficult to maintain.

Resources

- Natural England - TN104 Planting Trees and Establishing Fruit Trees (2010)
- Paths for All - Outdoor Accessibility Guidance (2023)
- Social Farms & Gardens - Resource Library
- Town & Country Planning Association - Guide 9: Long Term Stewardship (2017)
- UK Gov - Garden Communities Toolkit (2019)



Illustrative diagram showing living landscapes principles



Use innovative design to bring habitat and nature into public spaces - detail of a Grove School student design for a 'leaf bench'



Enable community growing projects to green streets



Activate spaces with community food growing schemes

Water Responsiveness



Ensure adequate protection in new developments for the **1 in 100 Year Flood**



Use **natural drainage features** to create attractive spaces for people, plants and wildlife

What is it and why is it Important

A water responsive approach will ensure that the area is focussing on climate resilient measures to help protect homes and reduce flooding. SuDS improve climate resiliency by lowering flow rates, increasing water storage capacity and reducing pollution run off. Water should be seen as a resource, to be captured and reused

The area is located within flood zone 1, meaning flooding from rivers is unlikely. However, wet spots from surface water flooding have been identified - reinforcing the need for SUDs

Must:

- Improvement works and new developments must implement adequate flood attenuation schemes for 1 in 100 year floods, as well as surface water flooding at a minimum (Policy 32).
- Water responsive interventions must include natural and green SUDs for the source capture of surface water flooding. These can include swales, attenuation ponds and raingardens.
- Care and maintenance - post event recovery and/or repair must be factored into the designs.

Should:

- Install rainwater butts on all suitable buildings
- New developments should aim to utilise an all natural approach to attenuation negating the need for underground water storage tanks and aiming for large attenuation basins for habitat creation (Policy 32)
- Where possible flood attenuation schemes should also double as spaces for recreation when not in flood and avoid barrier railings for example by using shallow gradients



Illustrative diagram showing water responsiveness principles



Green and lush Swale integrating playful route
Design Code, February 2024



Biodiverse Raingarden alongside transport corridor



Integrating play within sustainable storm water management

Resources

- Cambridgeshire County Council - Surface Water Management Plan (2014)
- CIRIA - The SuDS Manual (2015)
- Greater Cambridge Integrated Water Management Study (2021)
- Institute of Civil Engineers - SuDS Route Maps (2018)
- National Planning Practice Guidance - Green Infrastructure Guidance (2019)

2 Prioritise Walking and Cycling

Create a safe joined-up network for walking and cycling routes that can be combined with green space, trees and nature. Cycle ownership and use is very high in the neighbourhoods and one of the highest priorities for residents is a safer and better connected cycling and walking network for local trips.

"Kings Hedges was designed for walking so lends itself to being a good candidate for making it a truly active ward"

Resident comment via interactive map

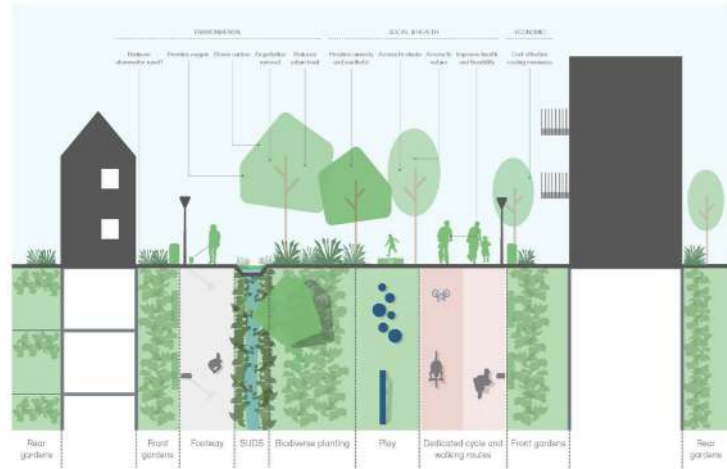


Image shows hypothetical street scene only to illustrate design requirements



Movement Opportunities

The plan opposite identifies opportunities to create a hierarchy of walking and cycling routes across the area. These join up the social infrastructure of the area and form attractive connections to the surrounding neighbourhoods and employment.

- Improved east-west walking and cycling connectivity between Histon Road, Arbury Town Centre and Cambridge Regional College and Science Park. Improved connections around Kingsway to link Roseford Road and Alex Wood Road.
- Traffic reduction and improved cycling and walking infrastructure on Arbury Road, with speed control features to form safe pedestrian crossings in Arbury Town Centre
- Improved cycling infrastructure and greening on Histon Road



Improving the route infrastructure is more than just the paths themselves, and includes integration of tree planting, sustainable urban drainage and natural planting, with convenient attractive places to sit and rest on the way.

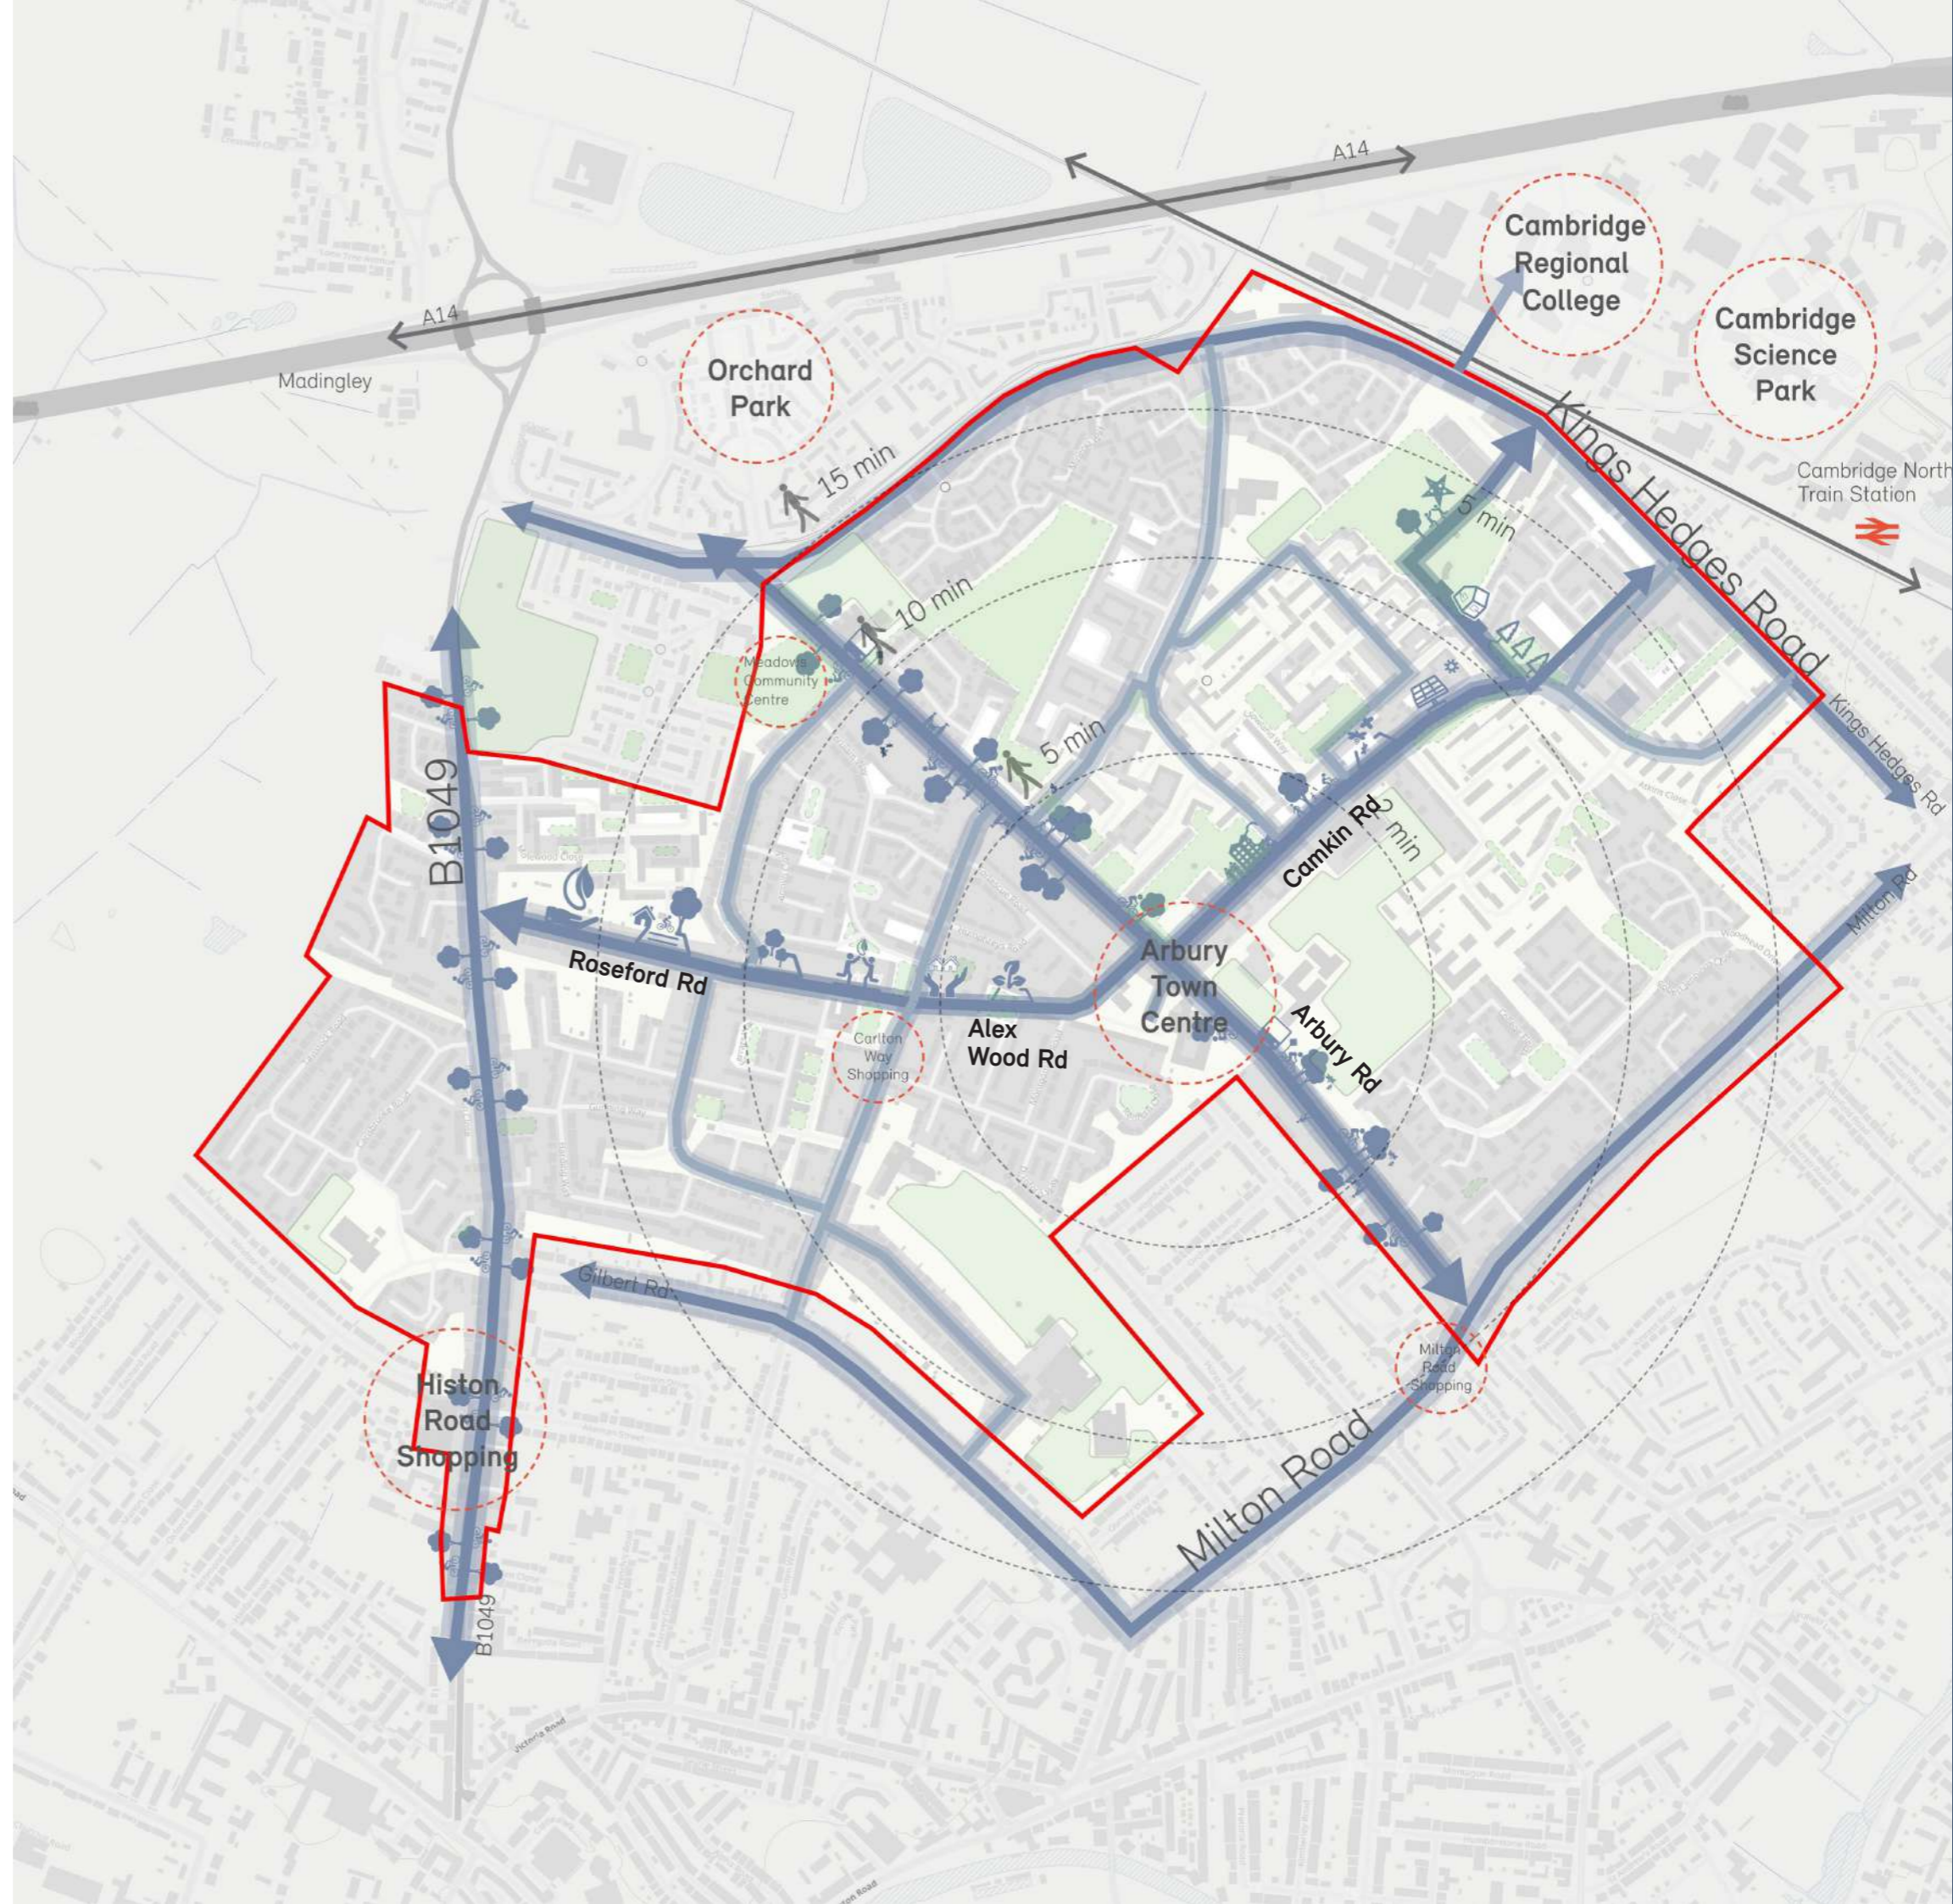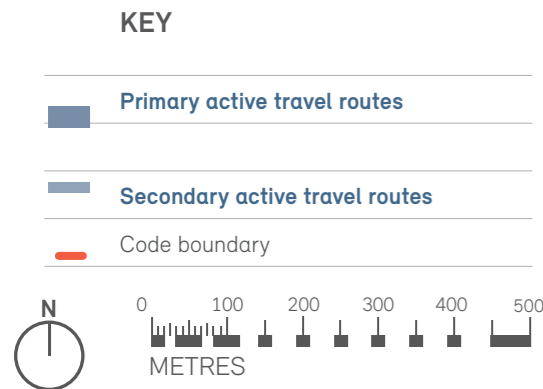

Green and Active Travel



Active travel and how to **encourage** it must be considered first in **any design proposals**



Active travel facilities should be provided **away** from **vehicle traffic** wherever possible

What is it and Why is it Important


Promoting walking, cycling and wheeling trips with convenient routes aligned with urban greening, natural habitat creation and well overlooked spaces will increase the permeability of the area and encourage residents to make shorter journeys by more sustainable means.

Must:

- Prioritise walking first, followed by cycling and wheeling, and ensure their places at the top of the travel mode hierarchy (Policy 5)
- Design direct and legible routes along key desire lines. (Policy 80)
- Provide smooth walking, cycling and wheeling surfaces preferably segregated from motor vehicles. (Policy 59i)
- Provide appropriate way-finding and route marking where required but limit use where possible.
- Maximise the attractiveness of the routes by providing appropriate width, lighting, planting and where appropriate, rest and contemplation areas (Policy 59 and 69)
- Include vehicle speed reducing measures to mitigate active travel user safety concerns and re-prioritise road space (Policy 80)

Should:

- Provide separation from carriageways and vehicles through planting and verges (minimum width 1m)
- Reduce crossing distances and provide continuous pedestrian/cycle and wheeling routes along direct desire lines.
- Open up and improve existing, unattractive pedestrian, cycling, wheeling links to provide natural surveillance.

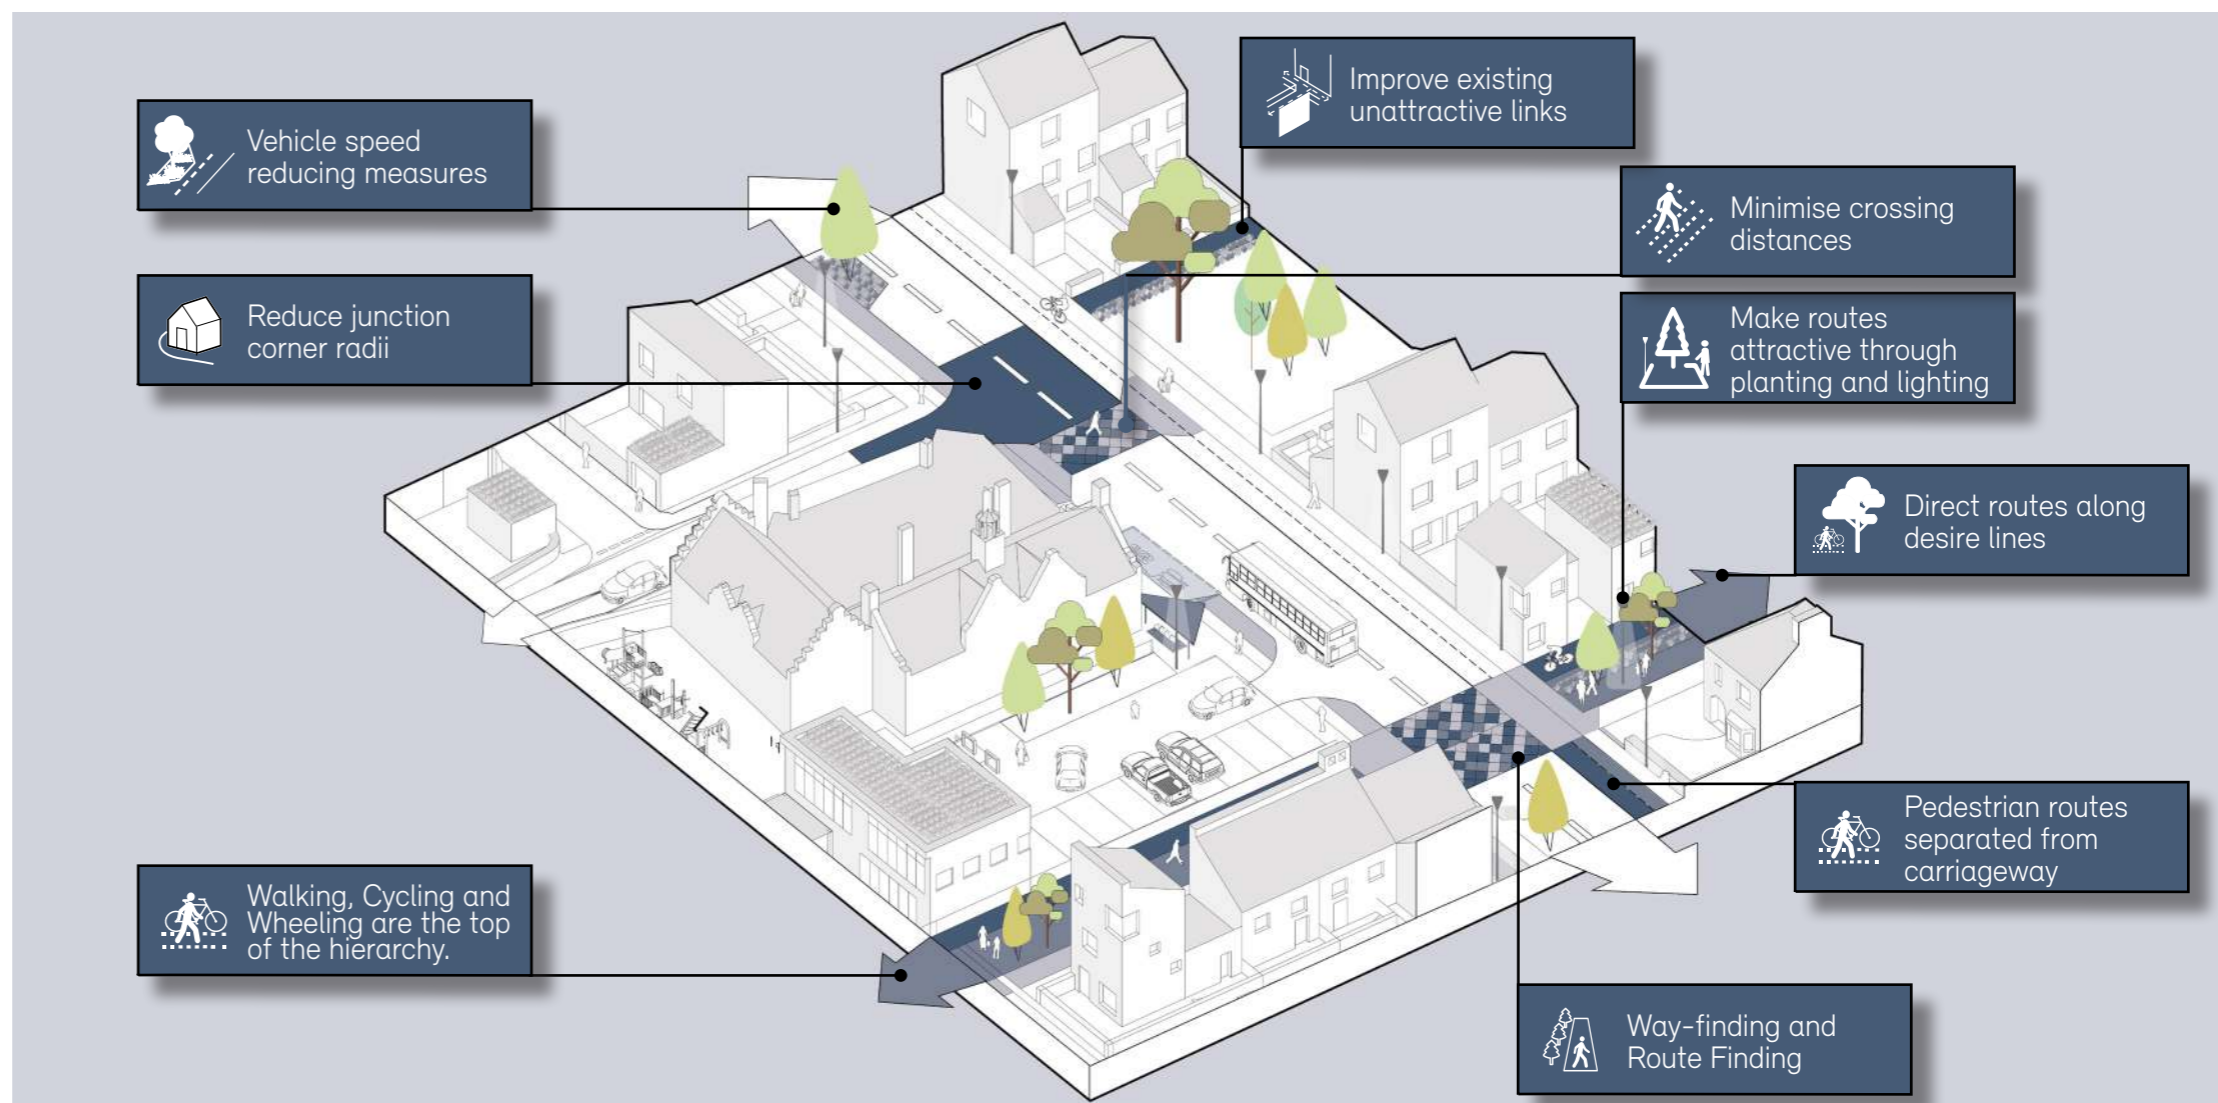

Illustrative diagram showing green and active travel principles



Making routes attractive through planting and lighting, **Abode, Cambridge**, Proctor Mathews



Direct routes along desired lines.



Improving existing unattractive links, **King Square, London Borough of Islington**, Pollard Thomas Edwards

Resources

- Cambridgeshire's Active Travel Strategy (Cambridgeshire County Council) 2023
- Cambridgeshire's Active Travel Design Guide (Cambridgeshire County Council) 2023

Cycle and Wheeling Trips

"All users need to be far more aware of others and there needs to be marked Road space for bike, pedestrian and car. There must be a solution that will suit everyone"

What is it and Why is it Important

In addition to wider active travel considerations, specific consideration needs to be given to encourage cycle and wheeling use for shorter and medium length trips.

Cycling and walking work well together in the context of a well proportioned shared surface, but should otherwise be segregated.

Must:

- Maximise the provision of cycle parking at least in line with Cambridgeshire City Council guidance (policy 82)
- Ensure residential cycle parking is covered, secure, lit and benefits from natural surveillance.
- Plan for cycle parking to be at least as convenient as car parking - where possible at the front of the home.
- Design for cycling/wheeling movements in the first instance separate from vehicle traffic - applying LTN/120 where possible
- Design for all types of cycling/wheeling movements including larger adapted cycles and cargo bikes.
- Seek to provide new cycle/active travel corridors to link with existing provision and address 'pinch-points', barriers and missing links (Policy 5d)

Should:

- Seek to provide cycle movements prioritised over vehicles at key road junctions with formalised cycle crossing points or incorporating cycle provision in to an existing junction design.
- In major developments seek to provide improvements to offer development links such as existing shared use paths that would benefit from widening, segregation, lighting.
- Avoid piecemeal, patchwork cycle infrastructure.
- Where possible avoid the use of staggered cycle gates which restrict movement for other active travel users.
- Incorporate electric charging as part of cycle parking provision.

Resources


- Local Transport Note 1/20 – Cycle Infrastructure Design (Department for Transport) 2020;
- Cambridgeshire City Council Local Plan 2018 – Appendix L (Car and Cycle Parking)





New **cycling** and **walking proposals** must aim to achieve **compliance** with **LTN/120 design requirements**



Improvements to the **cycling network** should always be considered as part of **any larger proposals**

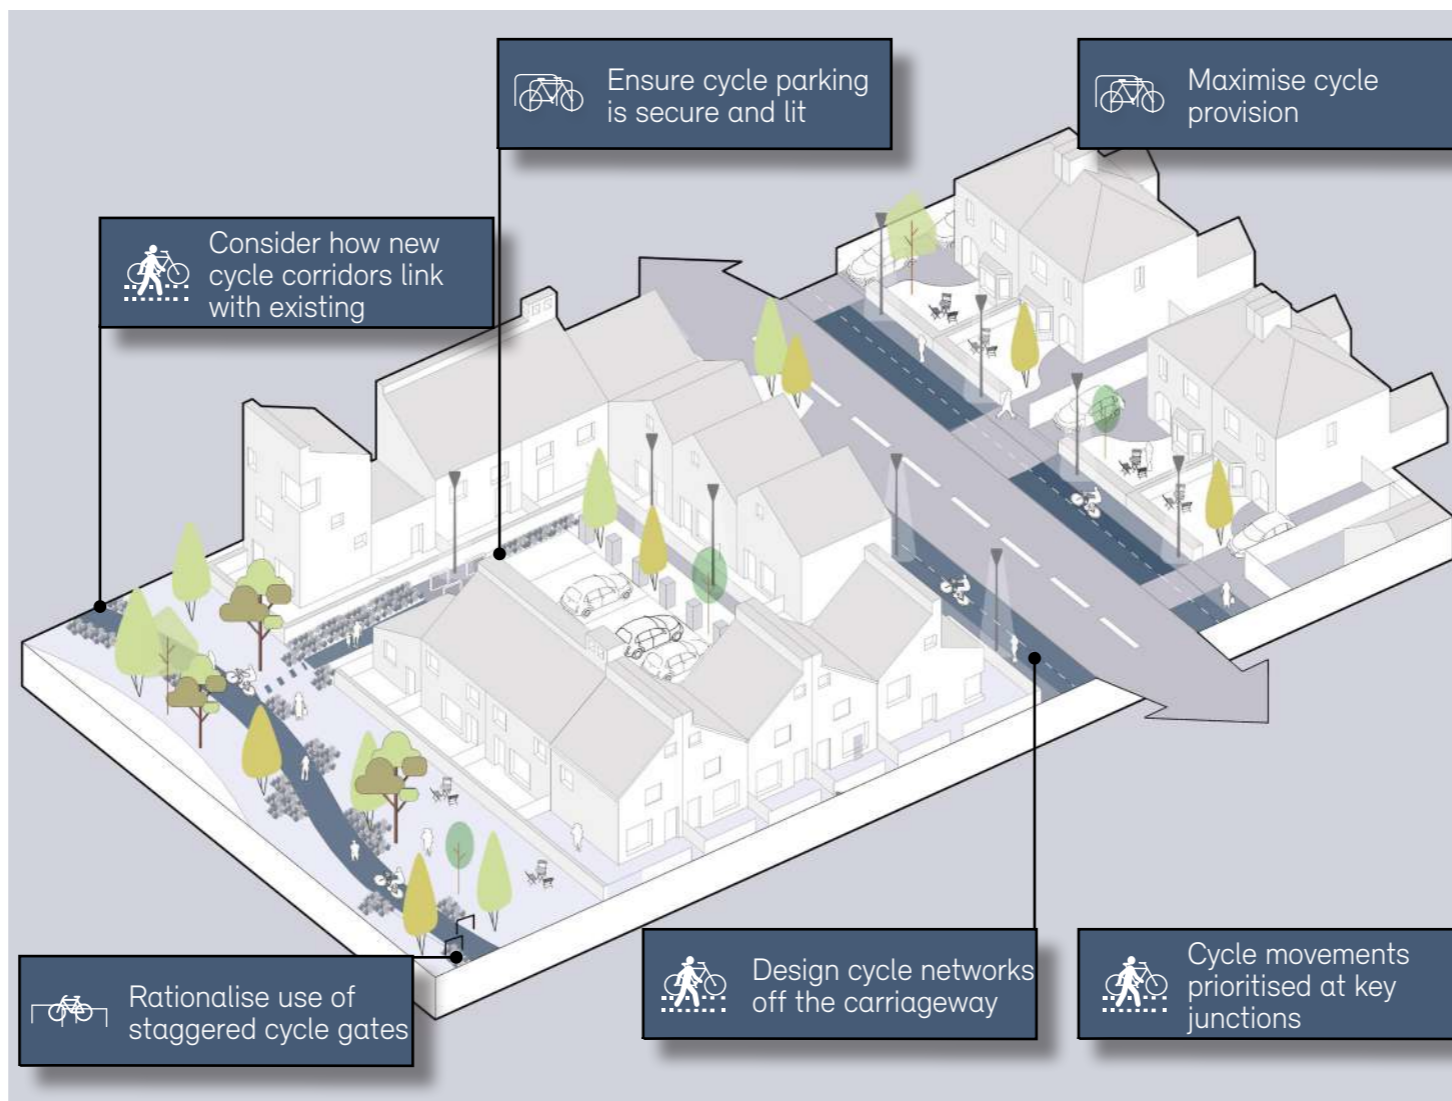

Illustrative diagram showing cycle and wheeling trip principles

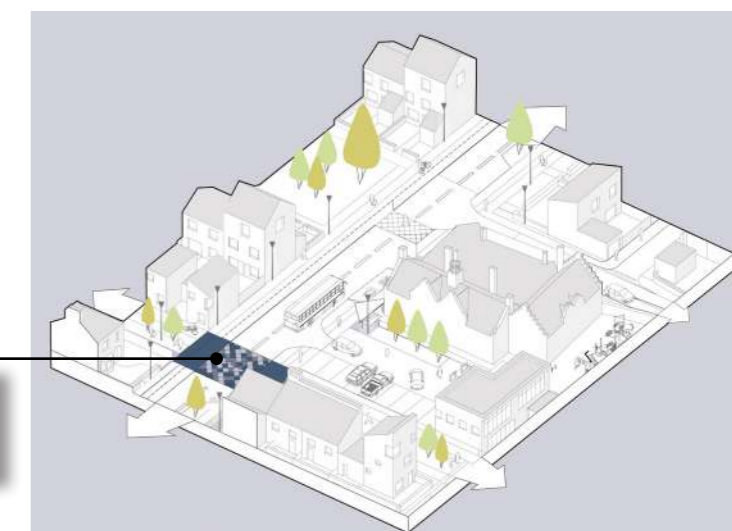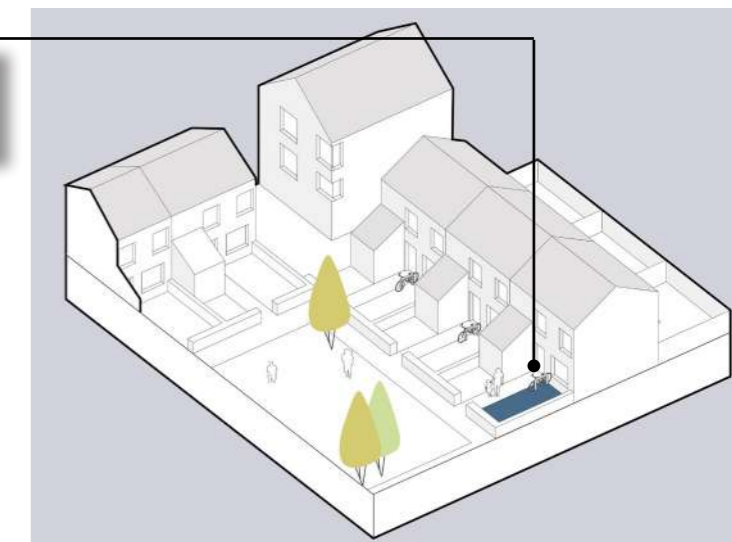

Shared street prioritising walking and cycling. **Marleigh, Pollard Thomas Edwards** Design Code, February 2024



Thoughtful integrated cycle stores that are secure and found close to entrances, **Charter Place, Hounslow Council, Pollard Thomas Edwards**



Segregated walking and cycling paths

Public Transport Use

"My mother struggles to walk all the way down Histon Road to the shops. It would be much easier if there were benches placed at regular intervals for her to rest."
Resident comment via interactive map

What is it and Why is it Important

Public transport use can, where appropriately encouraged and facilitated, make a significant contribution to longer sustainable travel journeys and when linked with appropriate green infrastructure, make up the longer leg of a fully sustainable trip.

Must:

- Improve walking, cycling and wheeling routes and links to allow easy access to all for existing public transport provision (Policy 80)
- Maximise public transport use for larger developments, i.e. what could be included, how the design could be tailored to fully encourage public transport use (Policy 5, 80b, 81)
- Provide upgrades or contributions to local public transport infrastructure with developer contributions. Always consider the provision of a shelter, real time information boards and seating in the first instance. (Policy 85)

Should:


- Target larger developments within 200m of existing public transport facilities/bus stops.
- Seek to provide new public transport facilities/bus stops when new demand is being created.
- Seek to provide designated carriageway space and provision at existing road junctions where appropriate.
- Review the potential to provide sustainable transport hubs to encourage linked sustainable transport journeys.



Development must always consider how access to **existing public transport** facilities can be improved to encourage **sustainable travel**



Improvements to **existing public transport infrastructure** and services should be considered wherever viable during plan making stages

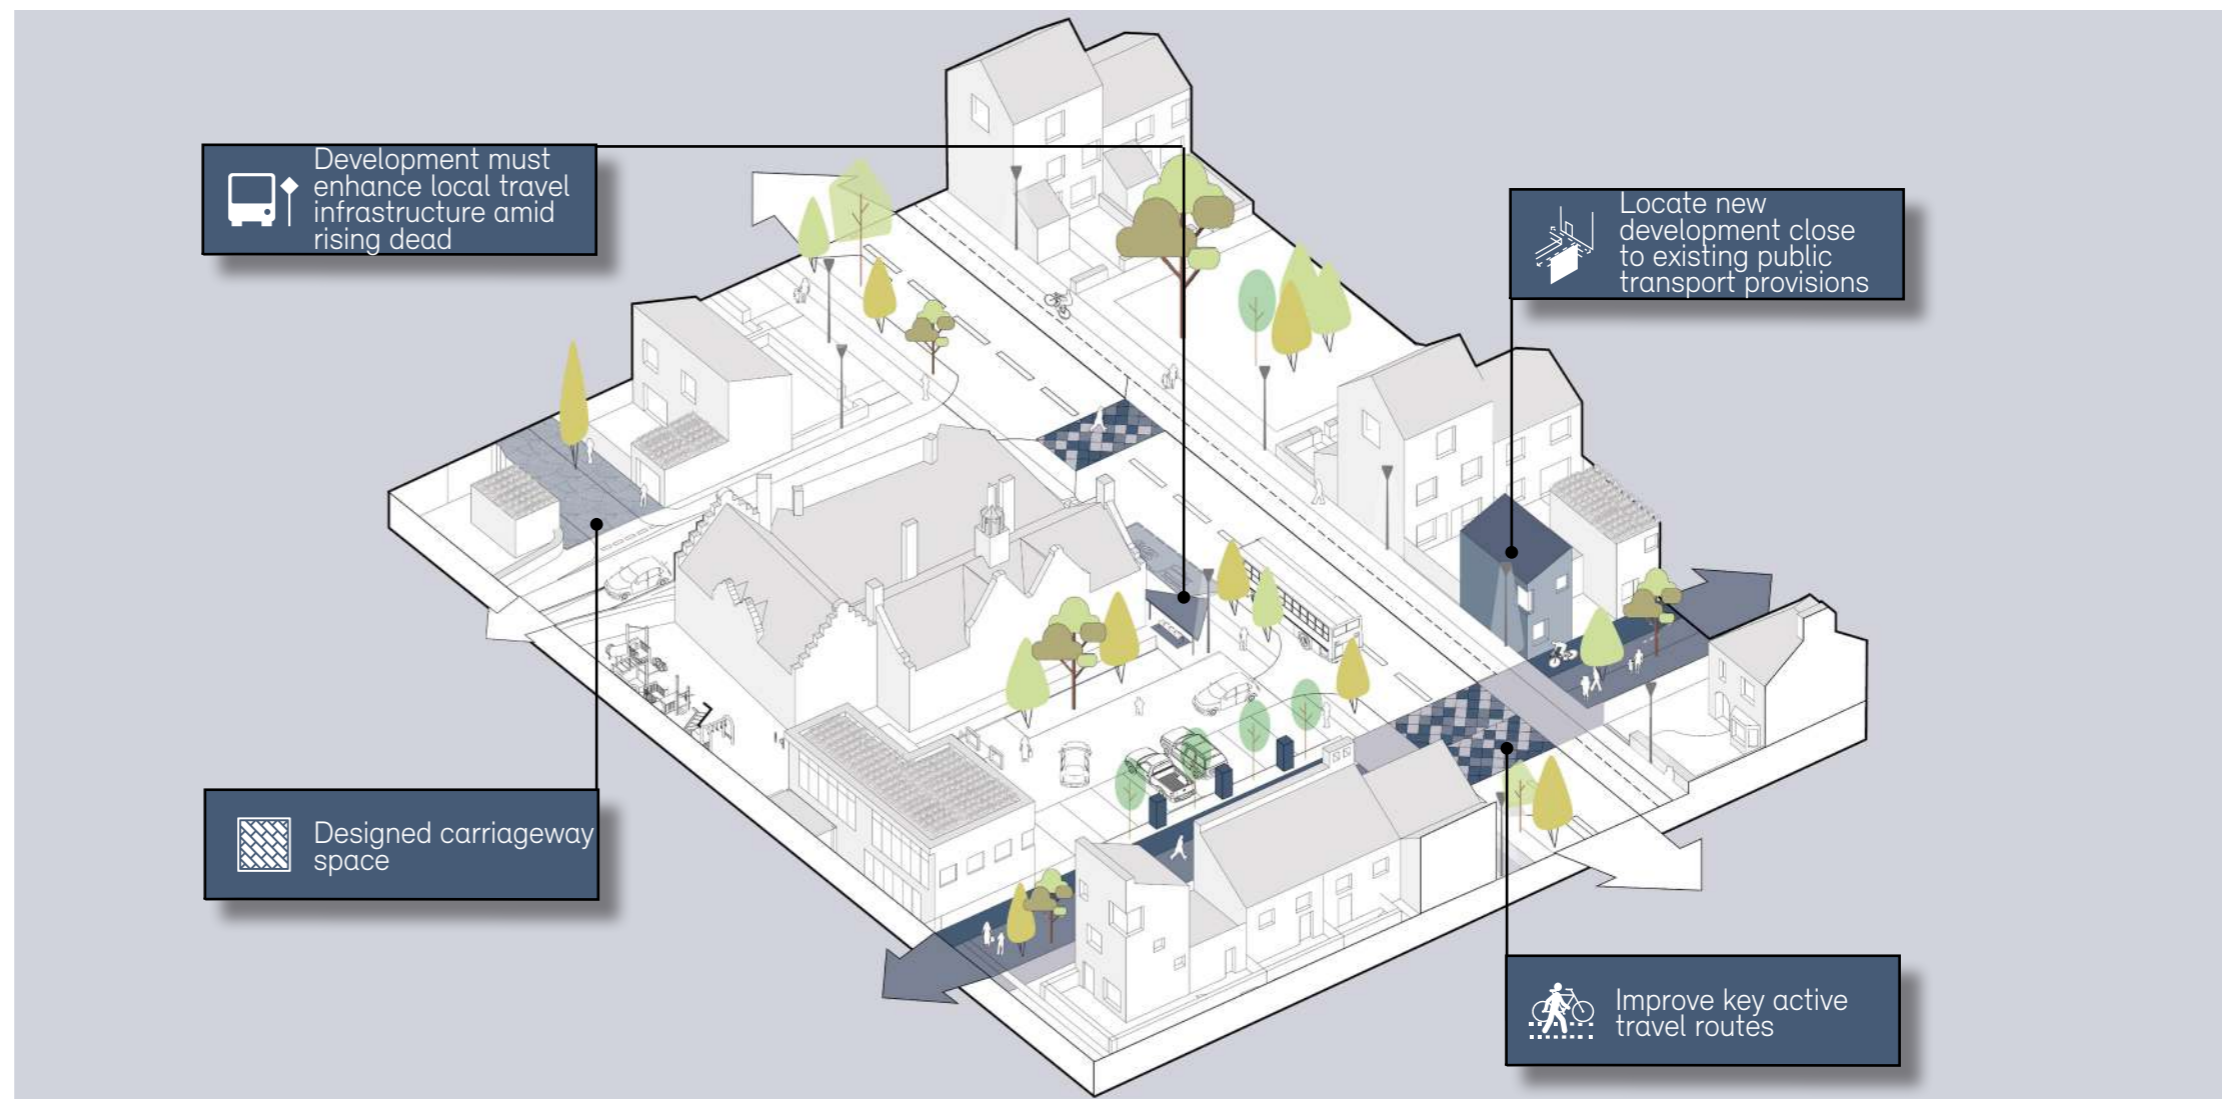

Illustrative diagram showing public transport use principles

Resources

- Manual for Streets (Department for Transport) 2007;
- Manual for Streets 2 (CIHT) 2010;
- Cambridgeshire City Council Local Plan 2018 – Appendix A (Public Transport Accessibility)



Examples of smart bus stop systems



Improving key active travel routes, Kings Crescent Estate, Hackney Council, Henley Hale Brown



Bus stop accessible from front entrances. Knights Park, Pollard Thomas Edwards.

Reducing Car Dominance

"Parked cars making it difficult to access safely with a pram - you end up walking in the road"

Resident comment via interactive map

What is it and Why is it Important

Historically some roads, streets and wider developments have been designed to facilitate car use which has led to vehicle dominated neighbourhoods. This Code should change how public space and travel modes are prioritised to encourage more sustainable, active travel modes whilst making sure that essential vehicle access and use can be accommodated.

Must:

- Design for sustainable active travel in the first instance and do not prioritise car/vehicle movements. (Policy 5b)
- Accommodate essential vehicle access and parking
- Provide infrastructure for Electric Vehicle (EV) charging points at all developments.
- Minimise car parking provision on new developments where possible and prioritise wheelchair users.
- Design car parking to relate to but not dominate the street scene.
- Aim to comply with LTN/120 design requirements (or successors)

Should:

- Look to provide car free development where this can be justified based on accessibility and existing car ownership/use data.
- Prioritise shared use of unallocated car parking to maximise usability.
- Promote and provide/fund Car Club vehicles to reduce the requirement for residents to own a vehicle.
- Re-prioritise road space to encourage safe and convenient active travel movements.

Resources


- Cambridgeshire Highways Development Management (General Principles for Development (2023); and
- Housing Estate Road Construction Specification (Cambridgeshire County Council) 2023;



All **developments** must consider the **'actual' car parking requirements** of a site rather than provide based on **standards**



Open space should be **prioritised** for **sustainable** and **active travel movements** over car parking provision

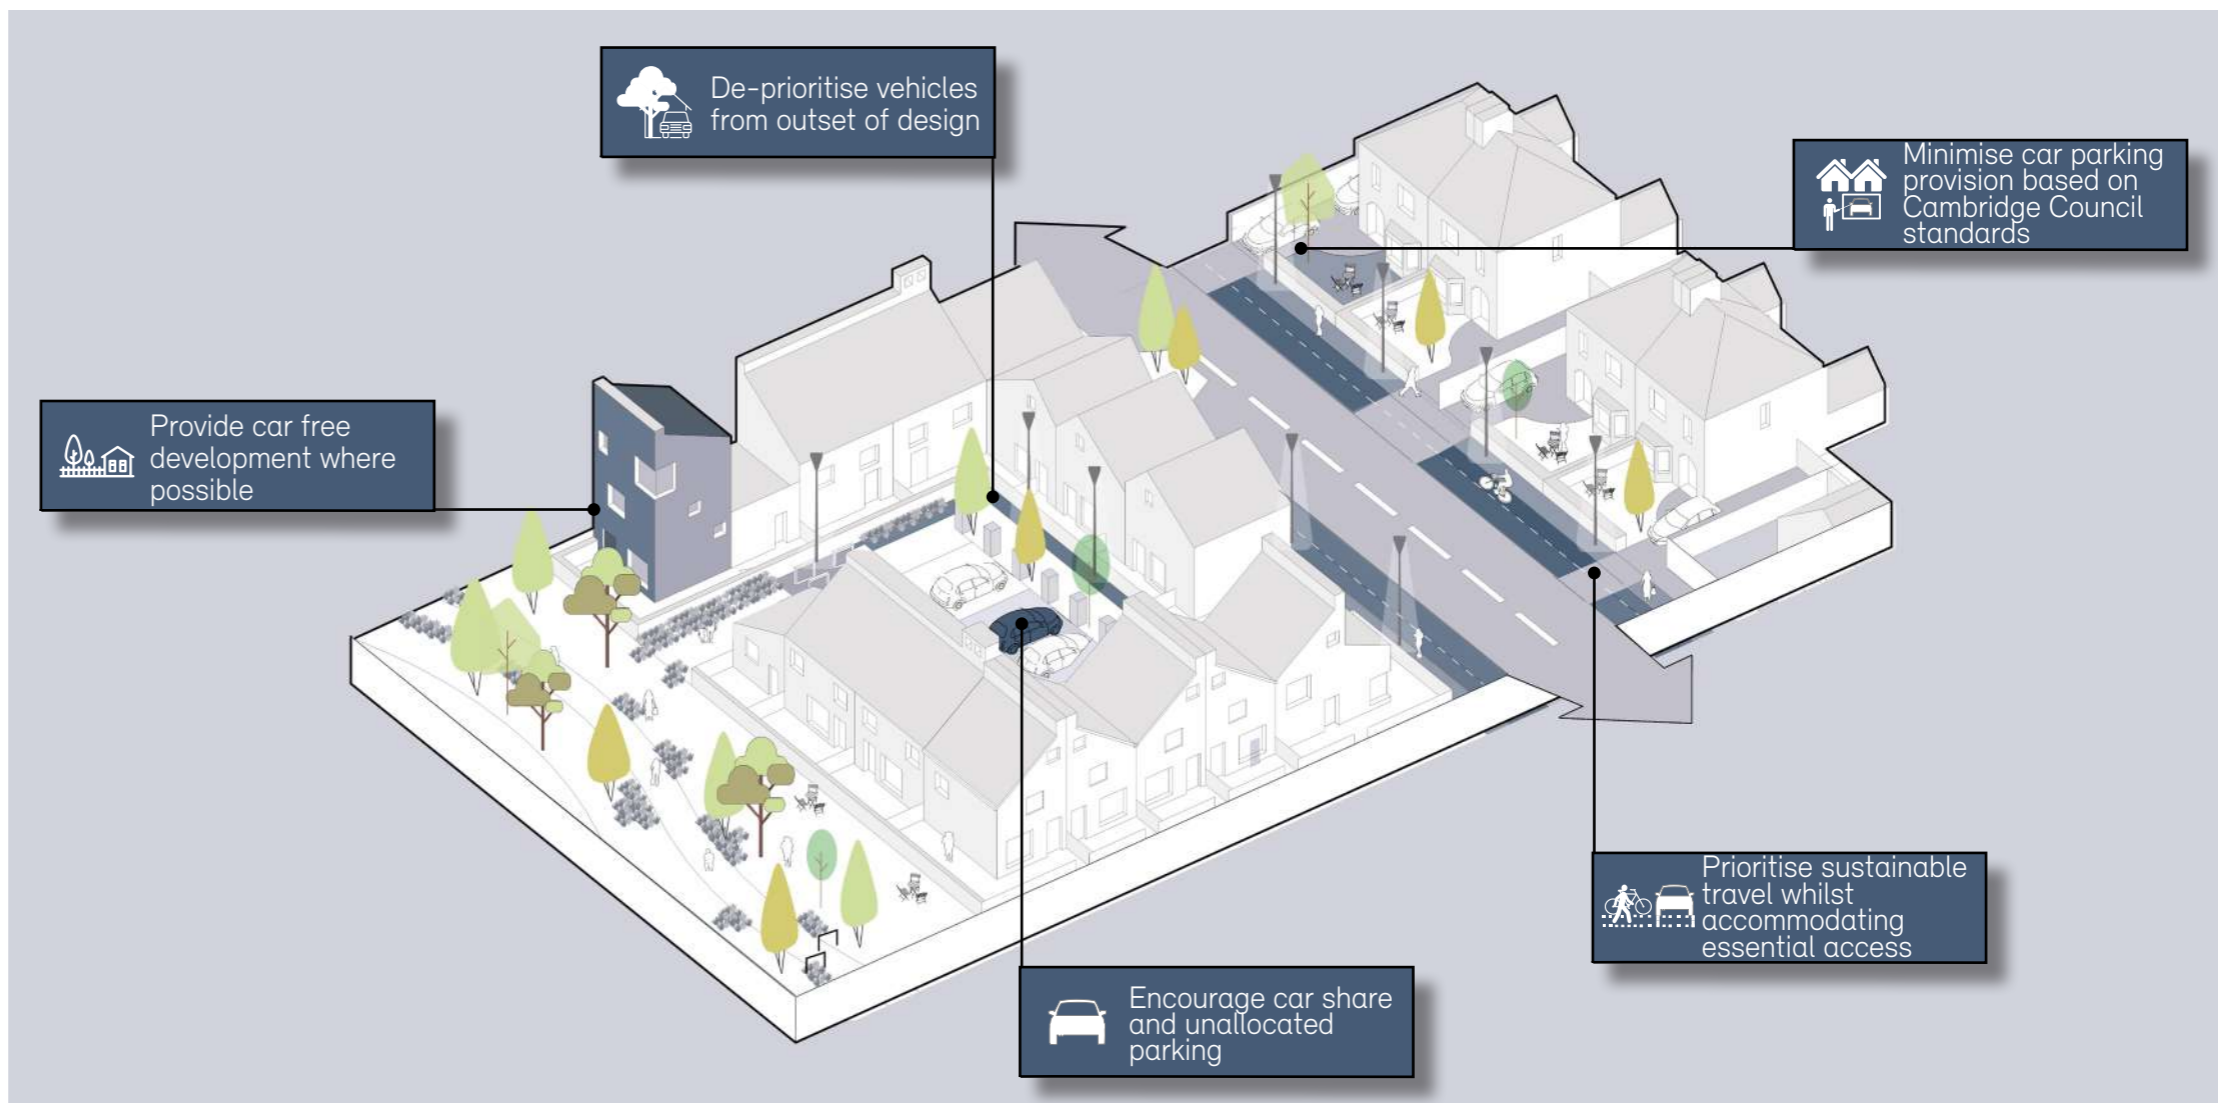

Illustrative diagram showing reducing car dominance principles



Car free streets that incorporate community planting, **Accordia, Maccreanor Lavington & Alison Brooks Architects** Design Code, February 2024



Houses looking over landscape with SUDs. Services hidden away at the rear. **Marleigh, Pollard Thomas Edwards**



Car free streets that prioritise walking/cycling and landscape, **Knights Park, Pollard Thomas Edwards**

3 Thriving Public Spaces

Public space matters, and can range from local centres to a shared garden, small square or quiet street. Spaces need to feel safe by being visible and overlooked and bring people, activities and nature together into attractive places.

Local centres need combined and multiple uses to help support them and to be well connected by the route network to surrounding neighbourhoods.

"Its good to live in Arbury town centre because there is a good park and lots of shops"

Grove Primary School student

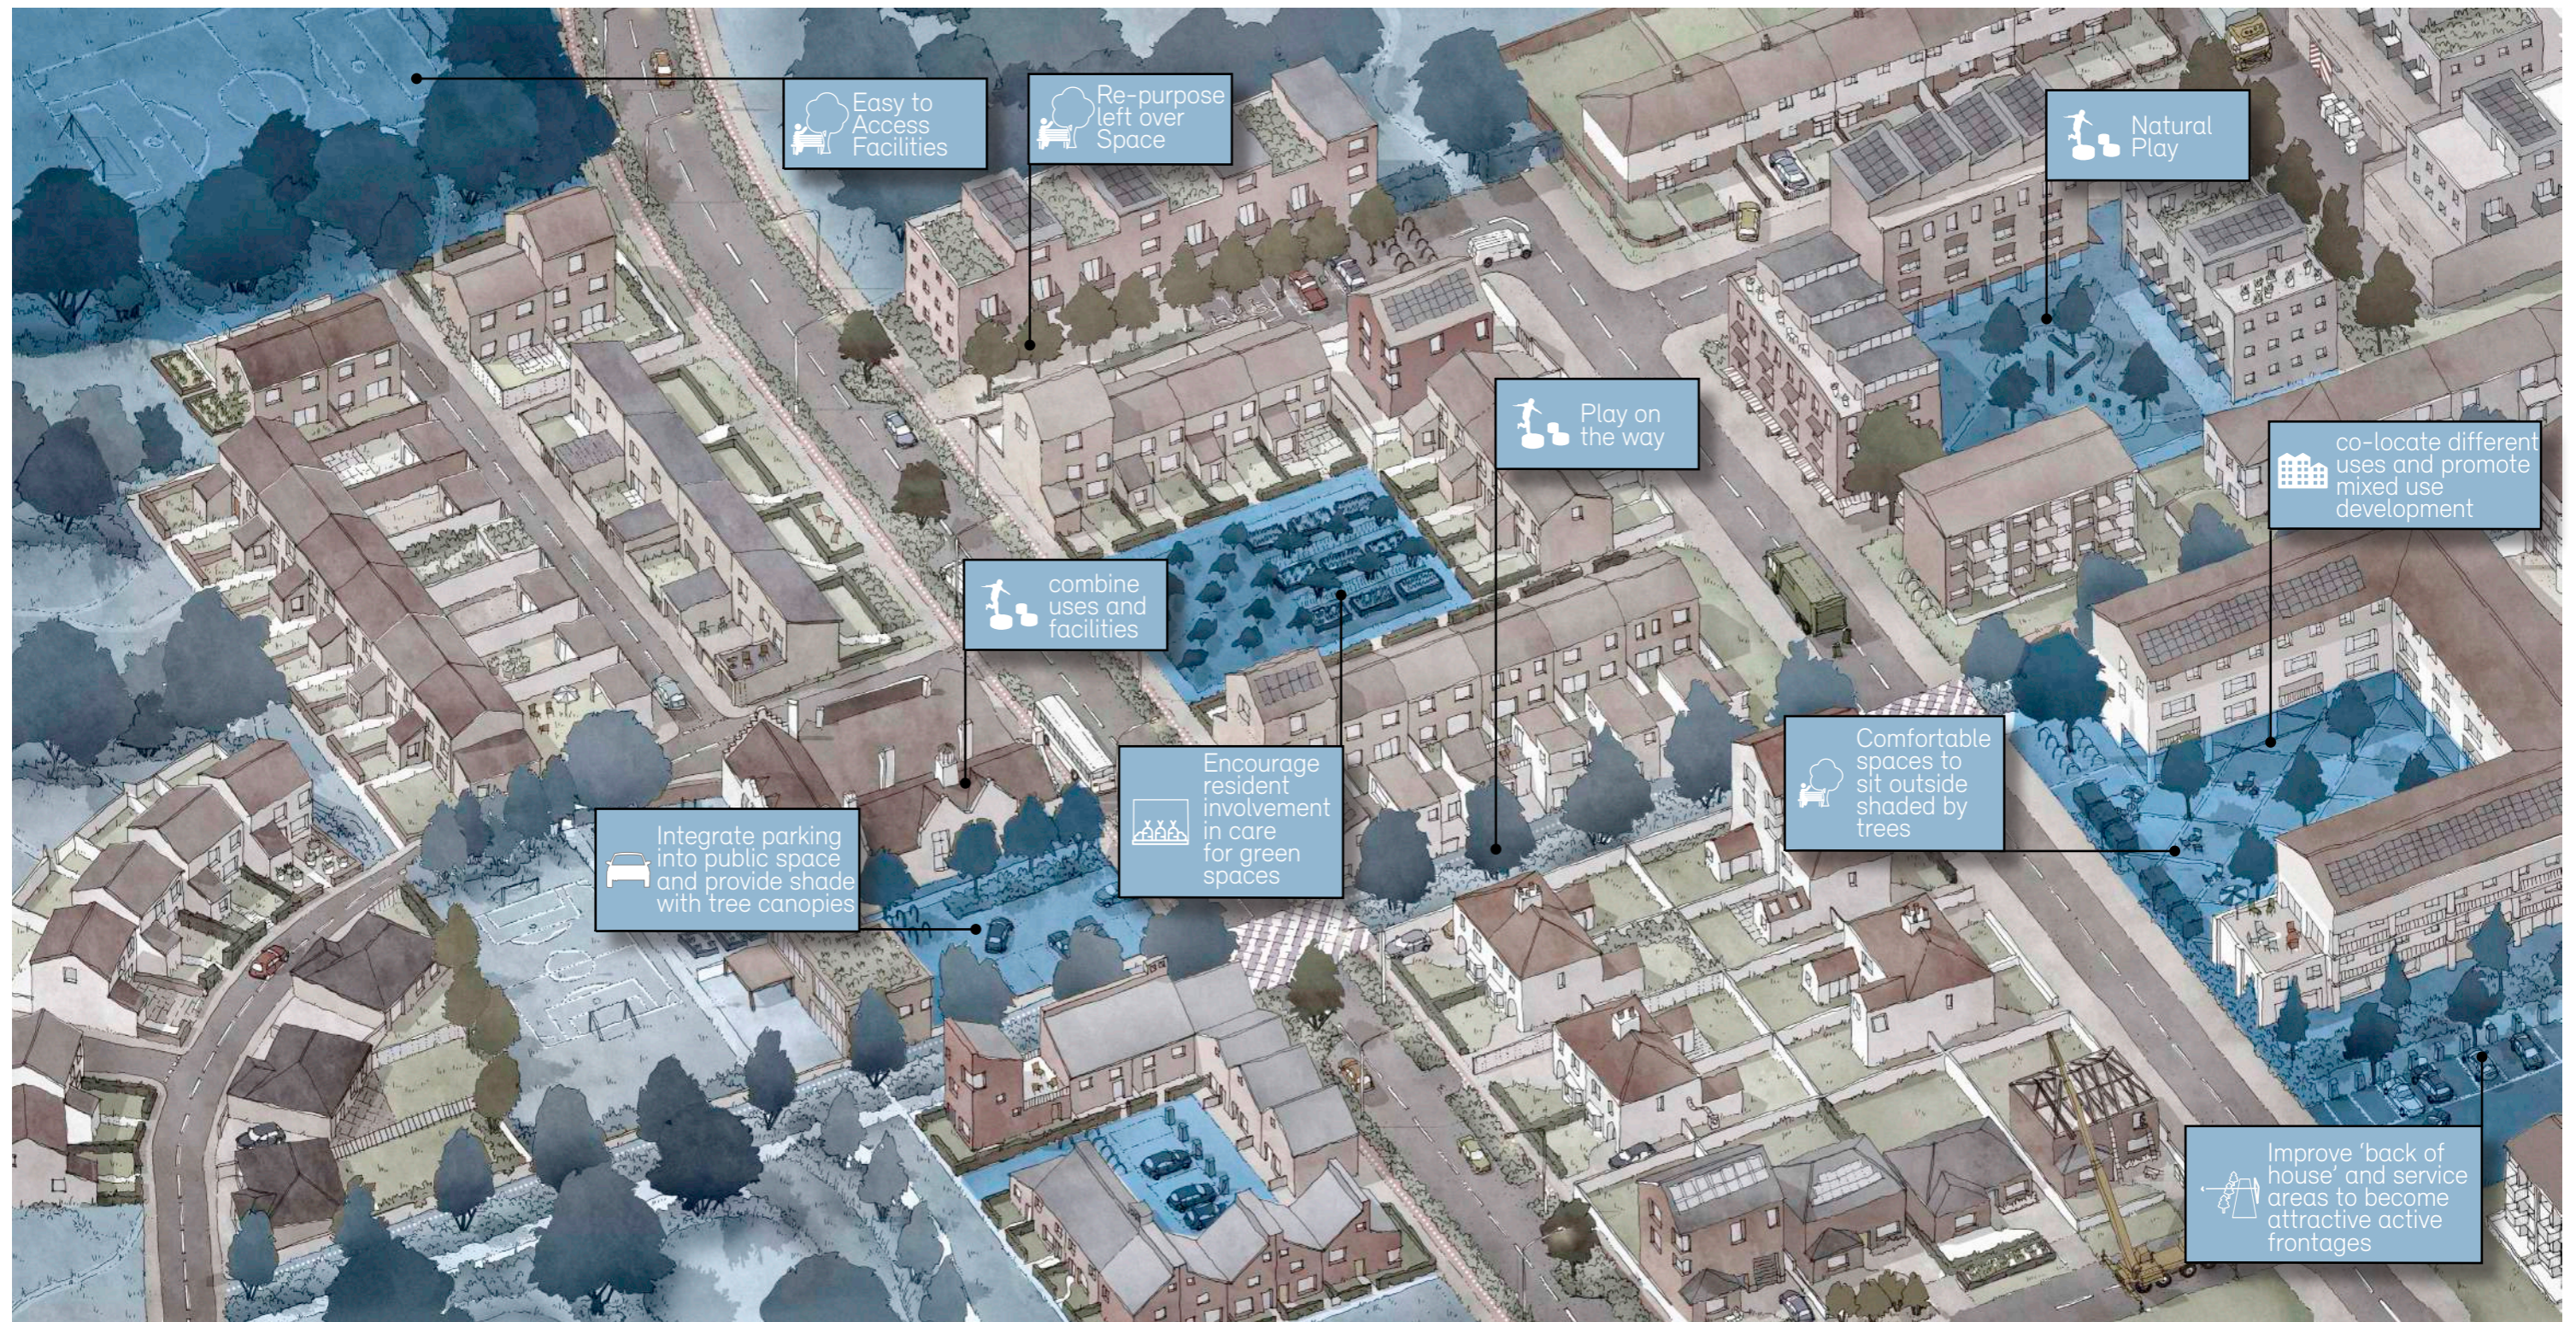


Image shows hypothetical street scene only to illustrate design requirements


Public Space Opportunities

The plan opposite identifies some initial opportunity areas to improve the quality of public spaces. Focus has been given to spaces where community uses and businesses come together, where physical connections between uses can be improved and outside spaces activated by the surrounding uses. An example of this is Arbury Town Centre itself.

Arbury Town Centre opportunities

- Opportunities to improve visibility of shops and other facilities from surrounding streets including Arbury Road, connections between uses, and increased flexible use of the pedestrian square
- Opportunities to enhance the setting and natural surveillance of the park with active building frontages
- Opportunities to remodel and improve the existing large car parking and servicing areas surrounding to integrate it as a positive part of the town centre and improve the setting for nearby homes and church.
- Opportunities to reinstate lost street frontages on Arbury Road, for example by relocating, redesigning or reducing existing car parking.
- Explore opportunities to improve public realm in residential streets and provide town centre homes above shops and other community uses

Proposals should not be restricted to large spaces. The streets and small pocket spaces that connect to them have an important roles to play as public space too.

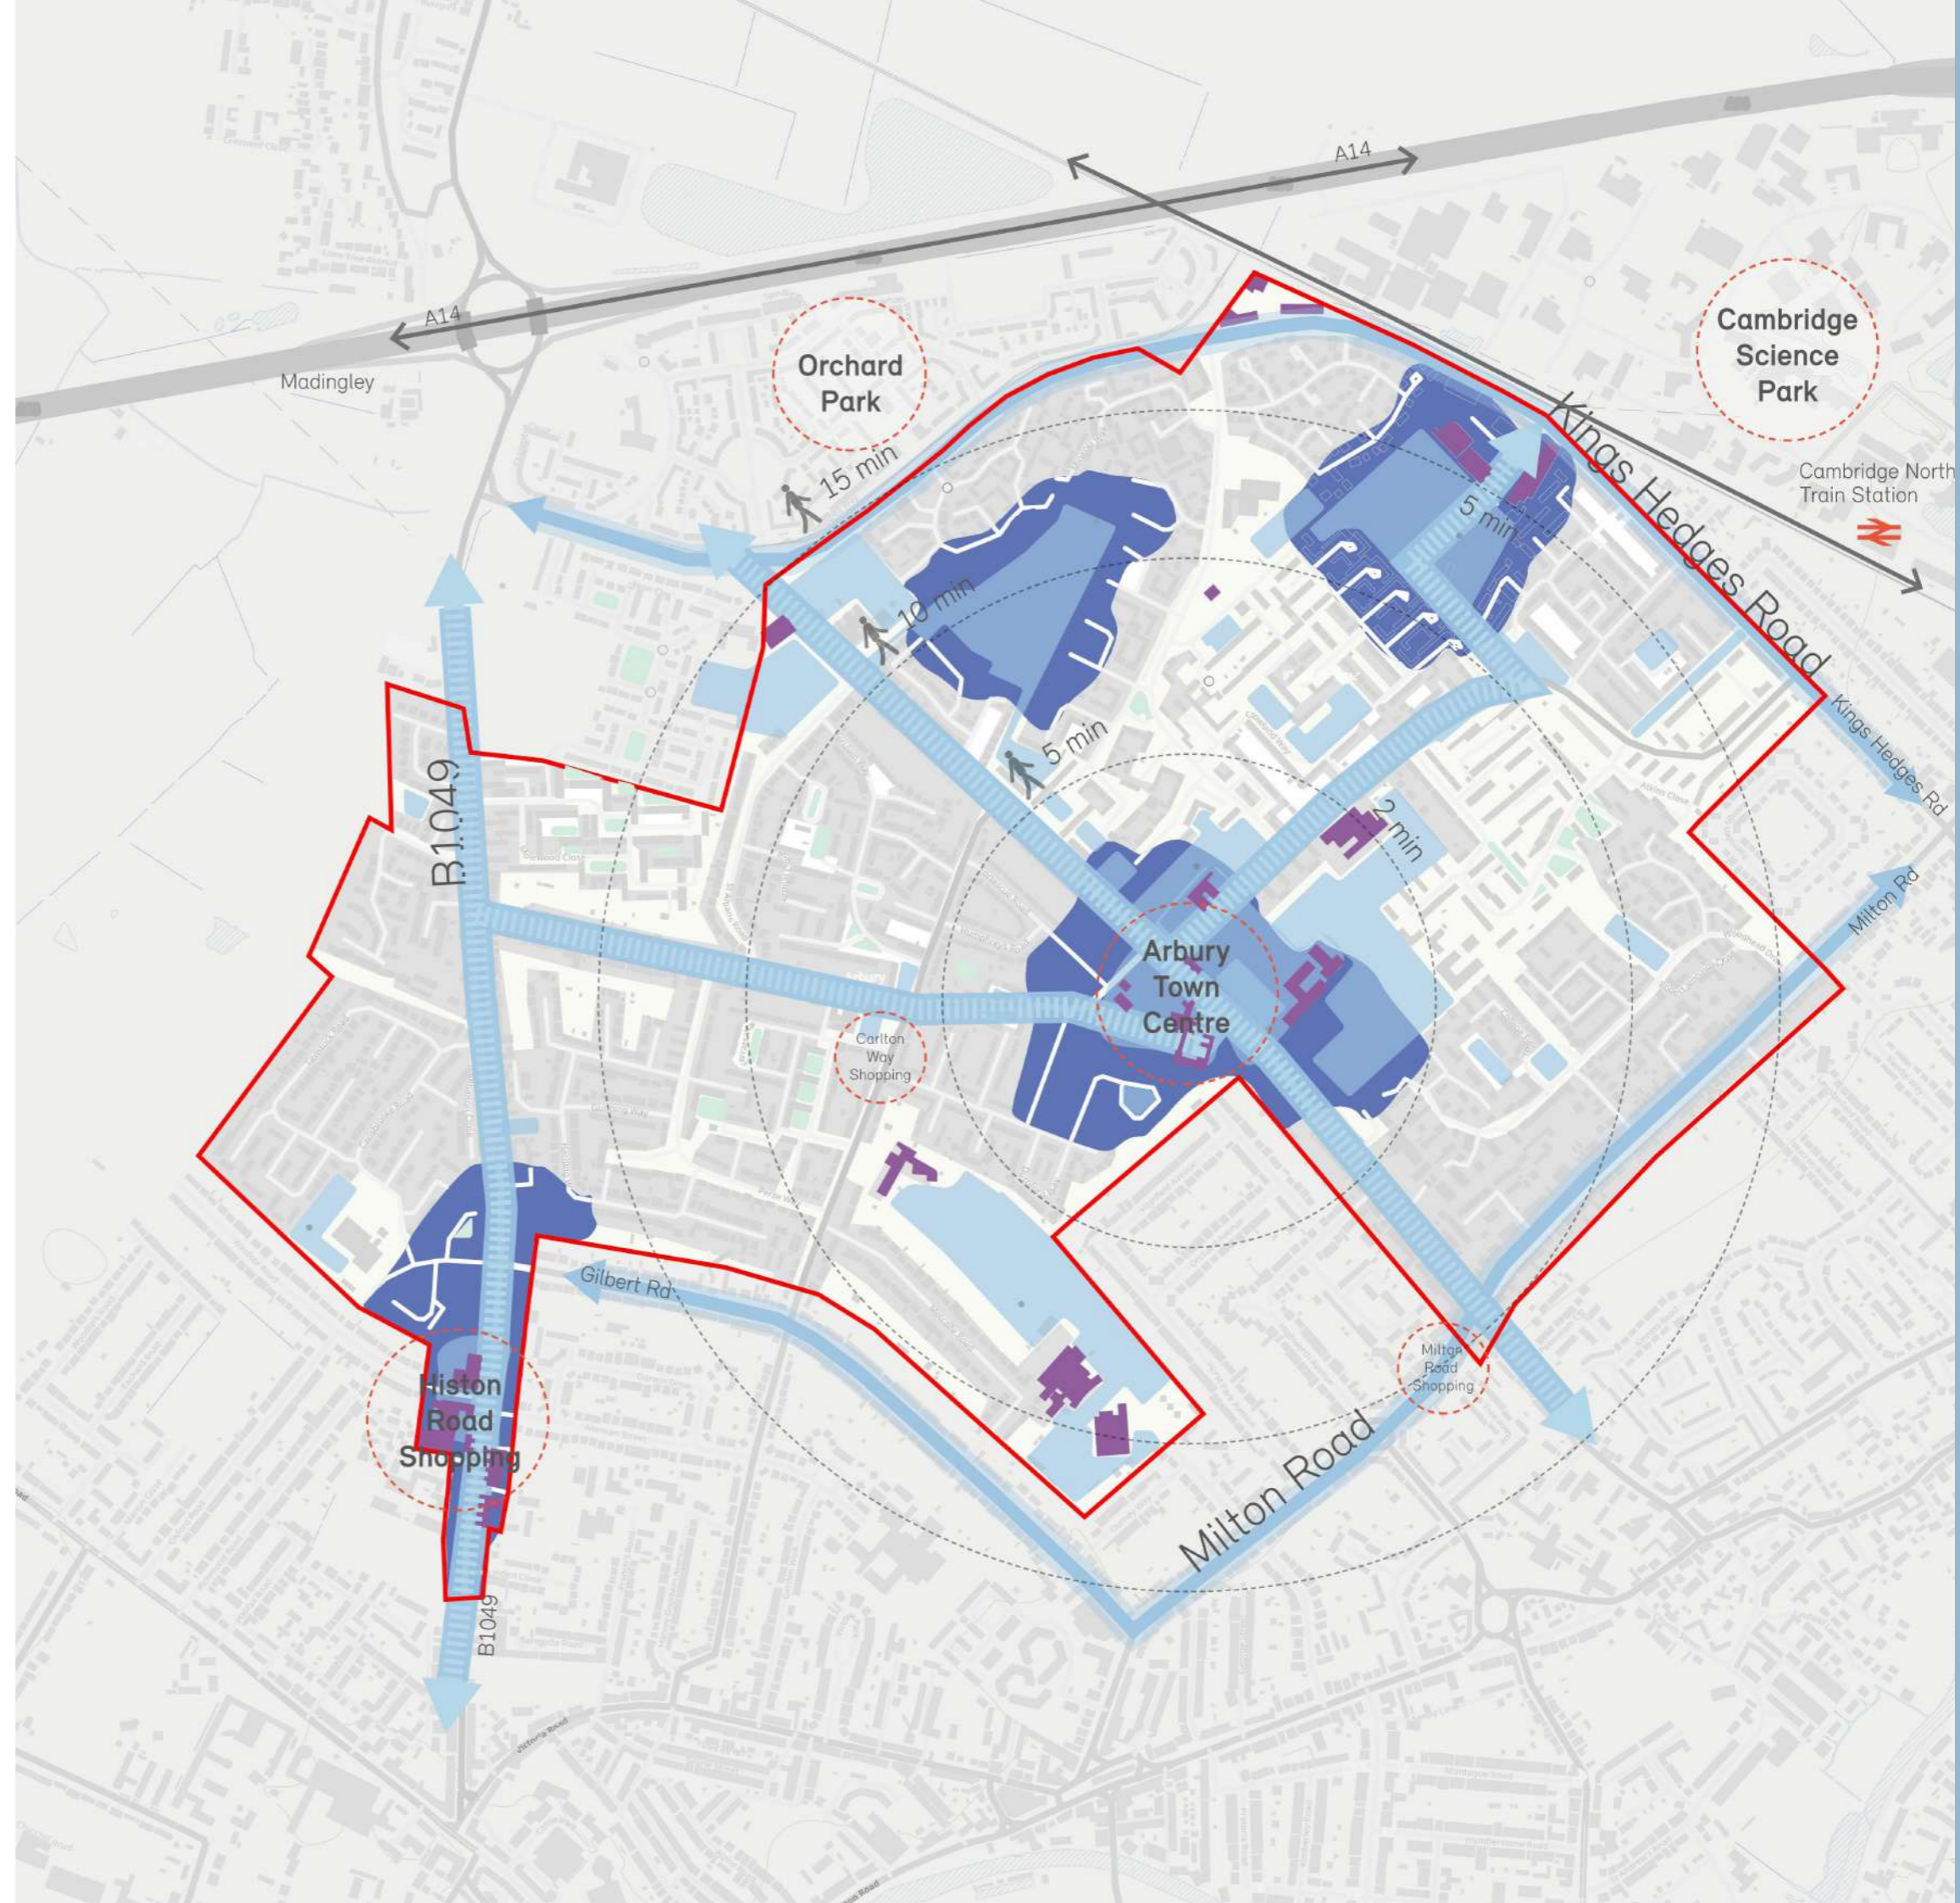

Cultural Sociability

"If we think of Kings Hedges more as a village we should have a park that's properly at the heart of the community"
Resident survey comment



Community Focal Points must be flexible creating public realm that can be used to cater for events



New developments should incorporate outdoor **community art installations**

What is it and Why is it Important

Public spaces can be large or small. They combat loneliness and isolation with a range of attractive, safe, well overlooked, and accessible places for social activities, meeting up, playing, and making connections.

There is a desire to enhance existing public spaces rather than create major new ones. Consider the hierarchy and identity of public spaces, from streets and pocket parks between homes, to the major parkland and shopping areas.

Must:

- Adaptations to the existing public realm must be inclusive, durable and fit for purpose. This includes lighting, way-finding and materials (policy 56, 59)
- Public spaces must be well defined e.g. by their form and enclosure, location on the route network, uses, and landscape treatment (policy 56).

Should:


- Community focal points should be able to cater for adaptive and flexible uses. This includes temporary social events and community festivals.
- Streets should be treated as public space, not just movement corridors by considering walking journeys, tree shaded places to sit, and play-on-the way.
- Public space design should support surrounding community and retail uses, for example sheltered external seating and pop-up events.
- Space designs should encourage involvement from local people in their design and future care.
- Public art with community involvement should be encouraged wherever feasible to build on local identity and create a welcoming outdoor environment.
- Public destination spaces, such as play, community uses and shopping should provide secure and well located cycle parking using Sheffield stands

Resources

- Arts & Planning Toolkit - Public Art
- Design Council - Inclusion by Design (2008)
- Local Government Association - People, Culture, Place: The Role of Culture in Placemaking (2017)
- Public Art Online - Public Art Commissions Good Practice (2007)
- Spaces - Streets as Places Toolkit (2015)



Illustrative diagram showing cultural sociability principles

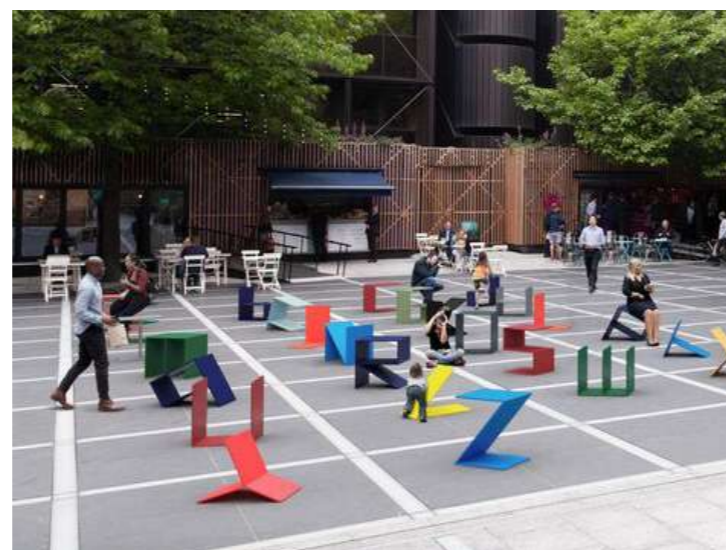

Moveable furniture for temporary events



Vibrant public art



Nature-based community events

Nature Based Play

"I'd love to see a little more play equipment that's in keeping with the 'natural' feel of the area and to see this area protected from development area."
Resident survey comment

What is it and Why is it Important

There are different kinds of play, which can range from quiet and social, to very physical, and need to cater for many different age groups and abilities. Play can integrate with landscape and nature.

Must:

- New play spaces must be in areas that are open, accessible and visible, and have good connections to residential areas and community amenities (Policy 56k).
- The provision must be diverse and integrated within streets and spaces with an emphasis on play for all ages, groups, and abilities (Policy 56, 59, 68).

Should:

- Larger developments should contribute to a play network to help provide a hierarchy of opportunities for play near to every home.
- Apply an appropriate play tool kit to control the quality and character of play space and its equipment e.g. Play England Charter for Children's Play
- Playscapes and play equipment should incorporate natural materials, for example wood and sand, and the incorporation play into SuDS schemes.
- Playspaces should encourage environmental awareness and stewardship from an early age - for example highlighting habitat for insects and birds.

Resources


- Arup - Nature-Based Play (2022)
- "Biophilic Playgrounds as Playscapes in Child-Nature Interaction" Cengiz & Demir (2019)
- Play England - Charter for Children's Play (2020)
- Sense - Toolkit: Making Play Inclusive (2016)
- UNICEF Child Friendly Cities and Communities Handbook (2018)



Play should be used as a driving principle to create **flexible and multi-generational recreational space**



Outdoor play teaches children how to become **stewards for nature** and care for their natural play spaces.

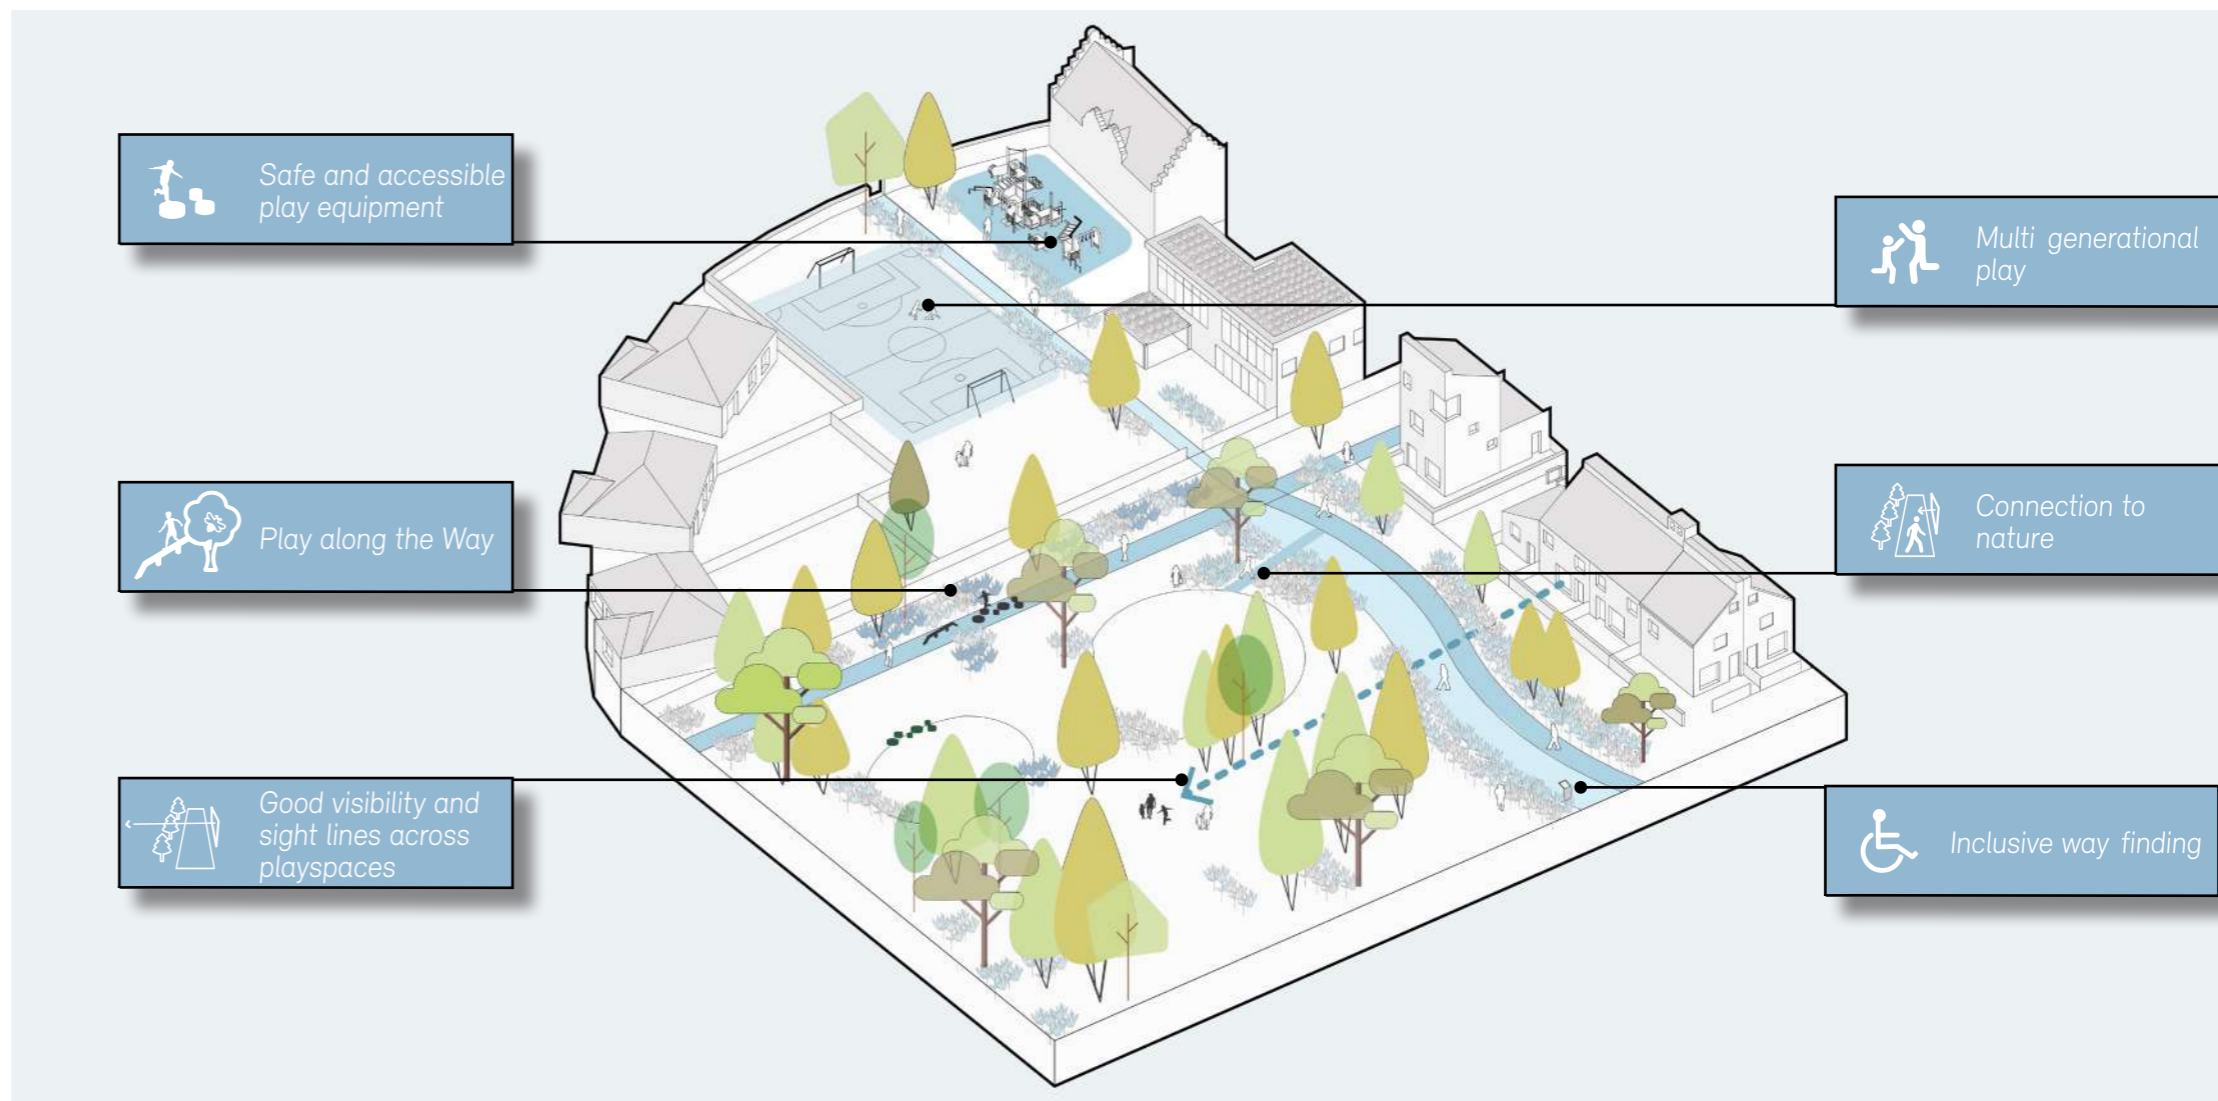

Illustrative diagram showing nature based play principles



A natural material palette
Design Code, October 2023



Intergenerational play



Play along the way

Active and Healthy Lifestyles



Prioritising **walking and cycling** within the area supports residents physical health, mental-well-being and is beneficial for the environment.



Places to stop and rest should be created every 50m through the streetscape

What is it and Why is it Important

Public spaces encourage active and social lifestyles through parks, trim trails, playscapes and community event spaces. Designs for activity need to be safe, accessible and fun for all, promoting physical and social well-being.

Must:


- Active and healthy lifestyle design interventions must be accessible and enjoyable for all ages, groups and abilities. Level access at all road crossings is essential (Policy 56, 59)
- Public spaces must provide adequate opportunity to stop, rest and enjoy social interaction. Trees, vegetation and playful structures must be provided to shade and shelter these places (policy 59, 71)
- Public parks must provide secure and well located cycle parking using Sheffield stands in line with the requirements of appendix L (policy 82)
- Open green spaces must safely combine necessary movement routes and social activities without having to resort to fenced enclosures (policy 56, 59, 70, 71).

Should:

- Recreational spaces should not be security gated or fenced (policy 56). As part of future works, consult to remove existing physical and perceived barriers, such as busy roads, for local people to green spaces.
- Avenues of trees, hedges and contrasts of mown/ longer grass should be used to create contrast and zoning for green space for public use.
- Integrate trim trails and playscapes or play-on-way alongside the route network. These are in addition to formal play. (policy 59).
- Expand the local cycle network to connect to other employment, transport, and cultural spaces including the science park and Cambridge North railway station

Resources

- Cambridge City Council - Open Space and Recreation Strategy (2011)
- Department for Transport - Inclusive Mobility Report December (2021)
- Move The Masses - The Move Map
- Make Space for Girls makespaceforgirls.co.uk
- Sport England active design guidance

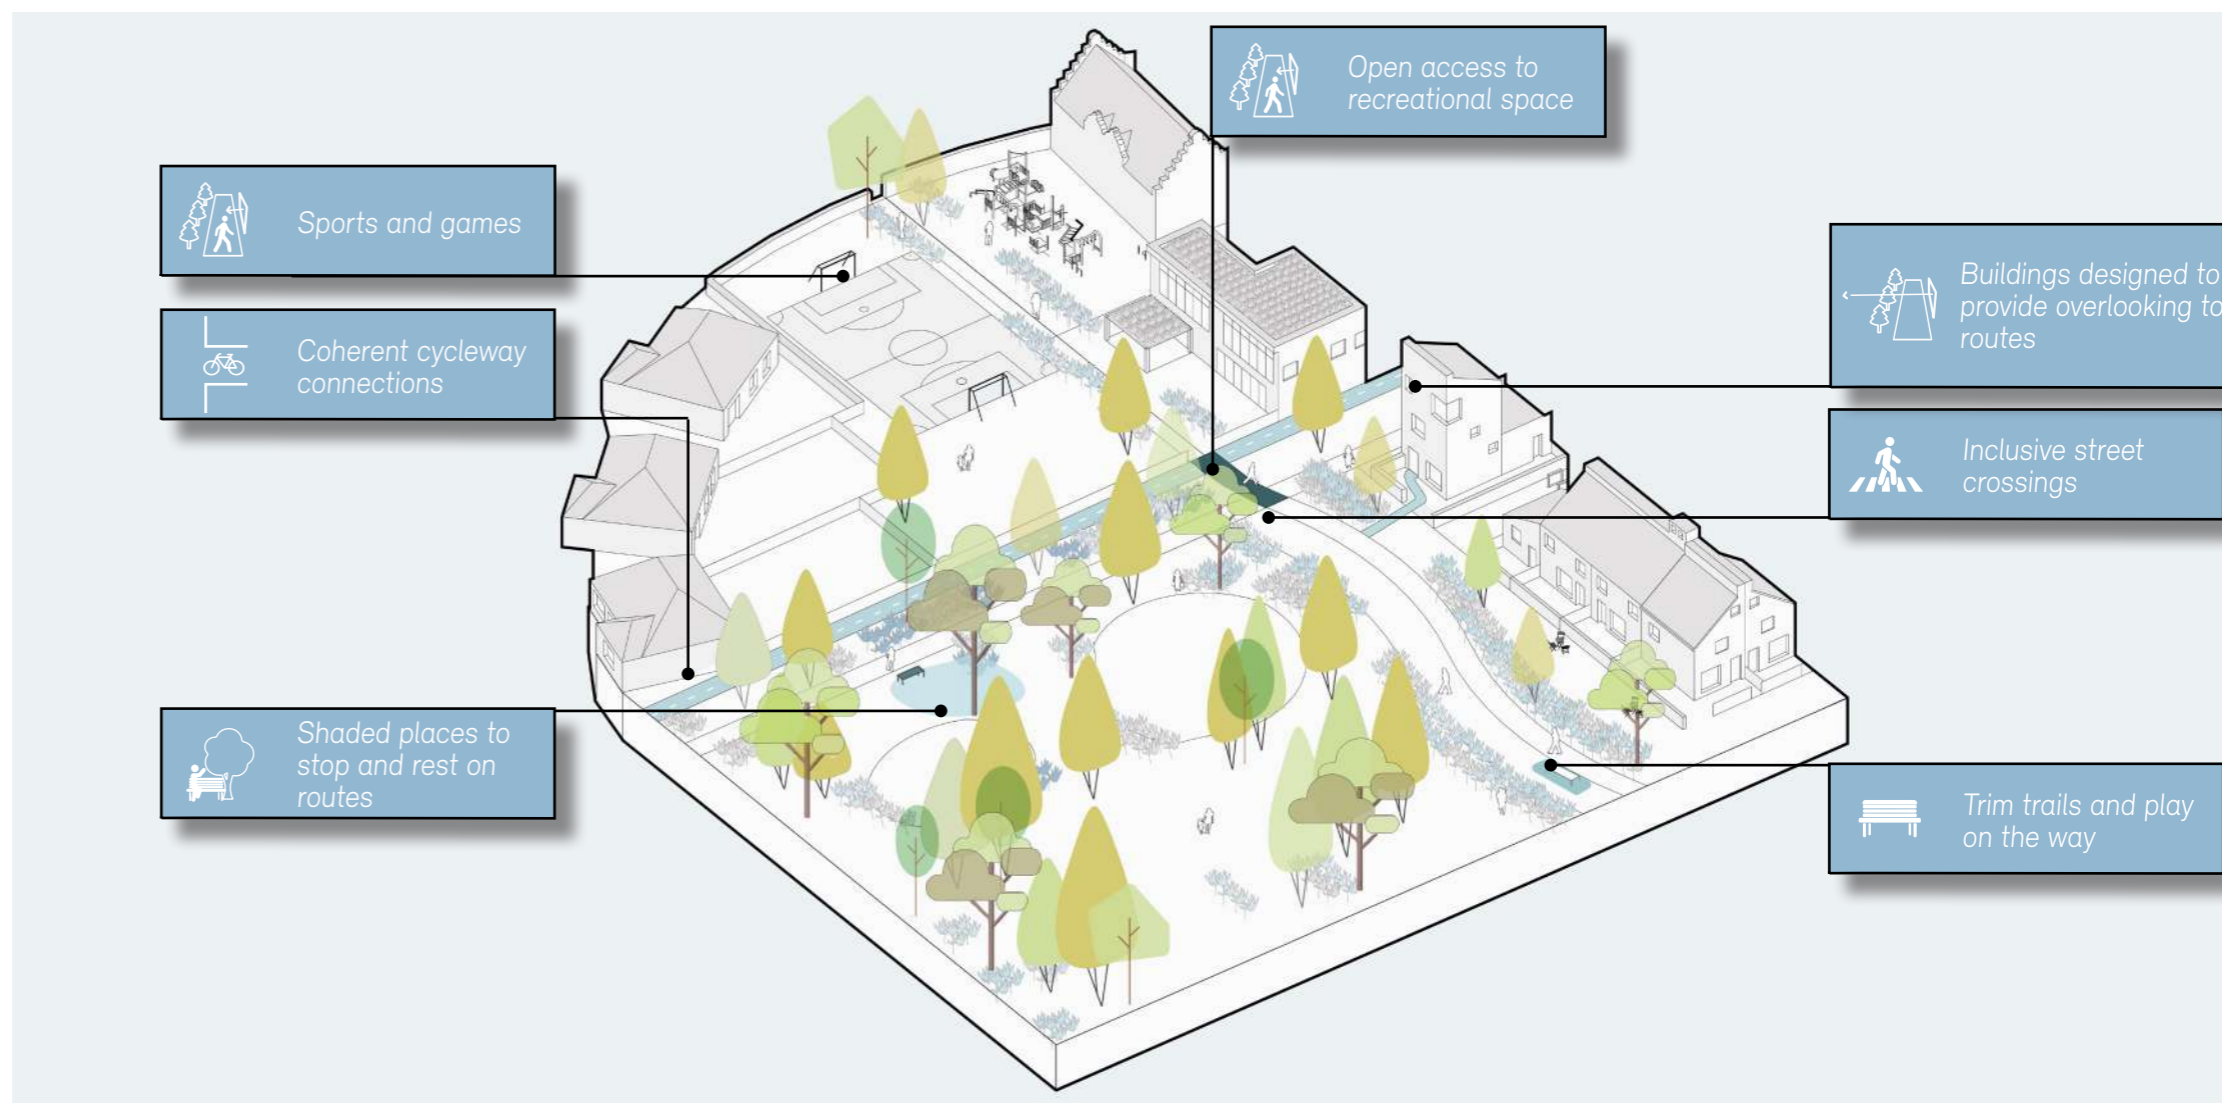

Illustrative diagram showing active and health lifestyle principles



Places to stop and rest amongst biodiverse planting



Multi-generational trim trails



A multi-modal plaza with biodiverse planting and shaded seating

Materials and Elements

"Large panels are very enticing to tag whereas thinner metal bars are very difficult. [Otherwise] it looks terrible after a few years which encourages vandalism more."

Resident comment via interactive map

What is it and Why is it Important

Thoughtful use of planting, materials and details in our public spaces will contribute to sense of value, the aesthetics of their long term care, their elegant usability, and their sustainability.

Good place design need not be expensive and can even save money, for example reducing large areas of costly paving reduces overheating risks and leaves more space for nature.

Must:

- Community amenity centres must include significant planting and trees to help shelter the space and foster social cohesion within a natural environment (policy 56, 59, 70, 71)..
- All new public spaces must be designed for inclusivity including textured paving blocks, level surfaces and 20mm kerbs. Surfaces must be robust, and loose gravel paths avoided (policy 56, 59, 80).
- Hardscape materials must be used in a consistent way to avoid a patchwork appearance (policy 55, 56, 59).
- Non-adopted paved surfaces must be permeable (policy 31, 56, 66).
- Paving colours and textures must be chosen to work harmoniously alongside surrounding building finishes for example Cambridgeshire's material vernacular of limestone and gault brick (Policy 55, 56, 59).

Should:

- Use a simple and consistent palette of hard and soft materials and street furniture and surface treatments, prioritising the use of natural materials where possible. (Policy 59).

Resources


- A Small Studio - A Bat's Highway: Lighting Design for Bats (2020)
- Department for Transport - Guidance on the Use of Tactile Paving Surfaces (2021)
- UN Habitat - Global Public Space Toolkit (2016)



An attractive, long-lasting approach to public space elements & using natural materials to create a legible, safe and accessible public realm



Hard surfaces must be **accessible for all**, have natural tones and encourage walking and cycling alongside social activities

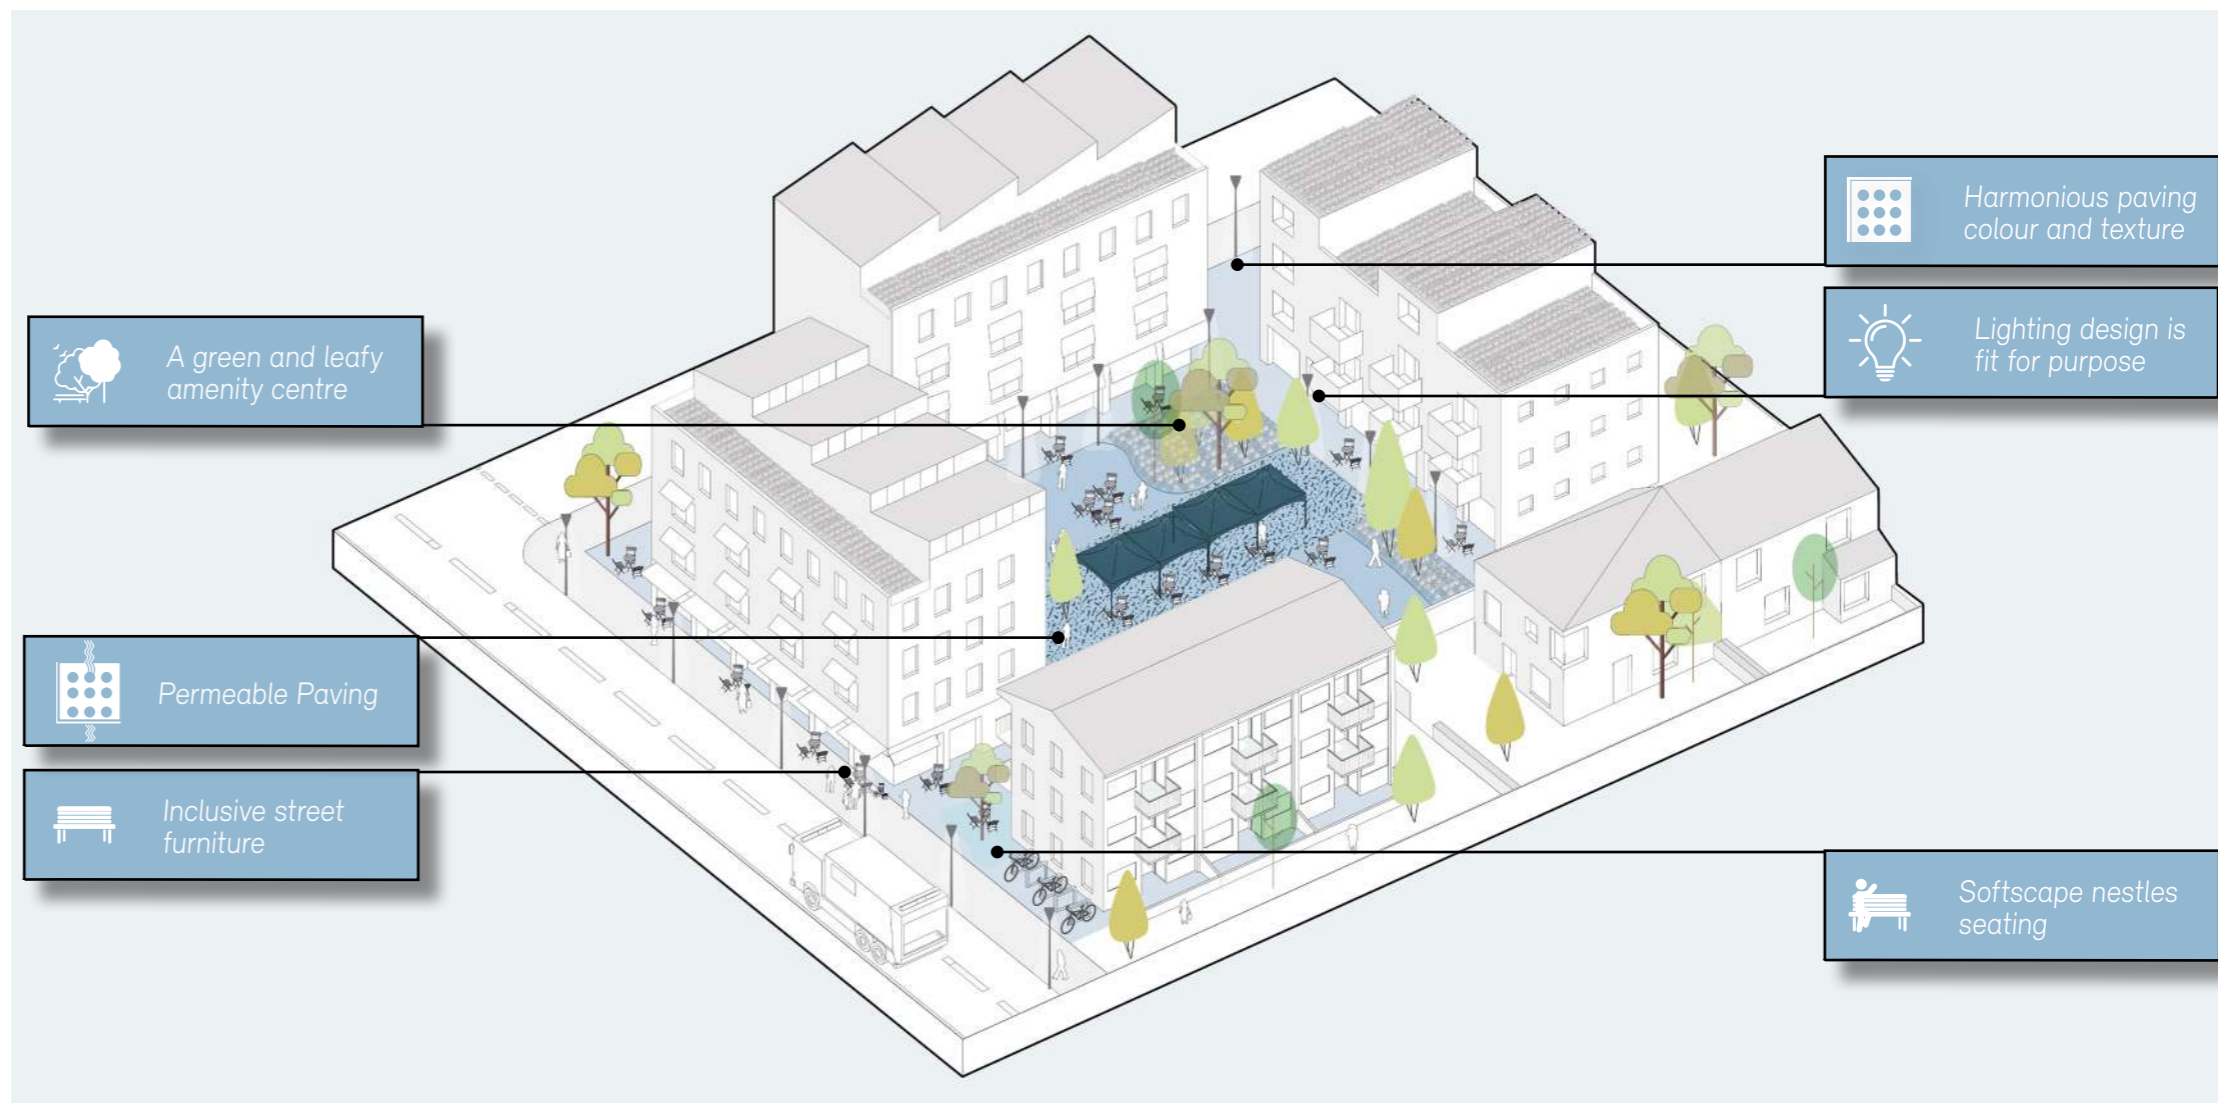

Illustrative diagram showing material and element principles



Permeable paving
Design Code, October 2023



Playful way-finding



Harmonious surface material and planting palette

4 Enhance Character

Residents want to strengthen the green character of the area, which is combined with a varied but gentle building scale. New developments need to work with the local scale of buildings and contribute safe, sociable streets and spaces, with focal points

and memorable but harmonious buildings in key places. New developments and s106 contributions must be harnessed to benefit the local area, with the existing local environment invested in and seeing improvement when there is new construction.

"We need more homes.... I hope this isn't code for 'no taller or denser developments allowed.'"

Resident comment at workshop 3

"Everyone needs to benefit, not just new residents, what about looking after what we've already got!"

Resident comment at workshop 3

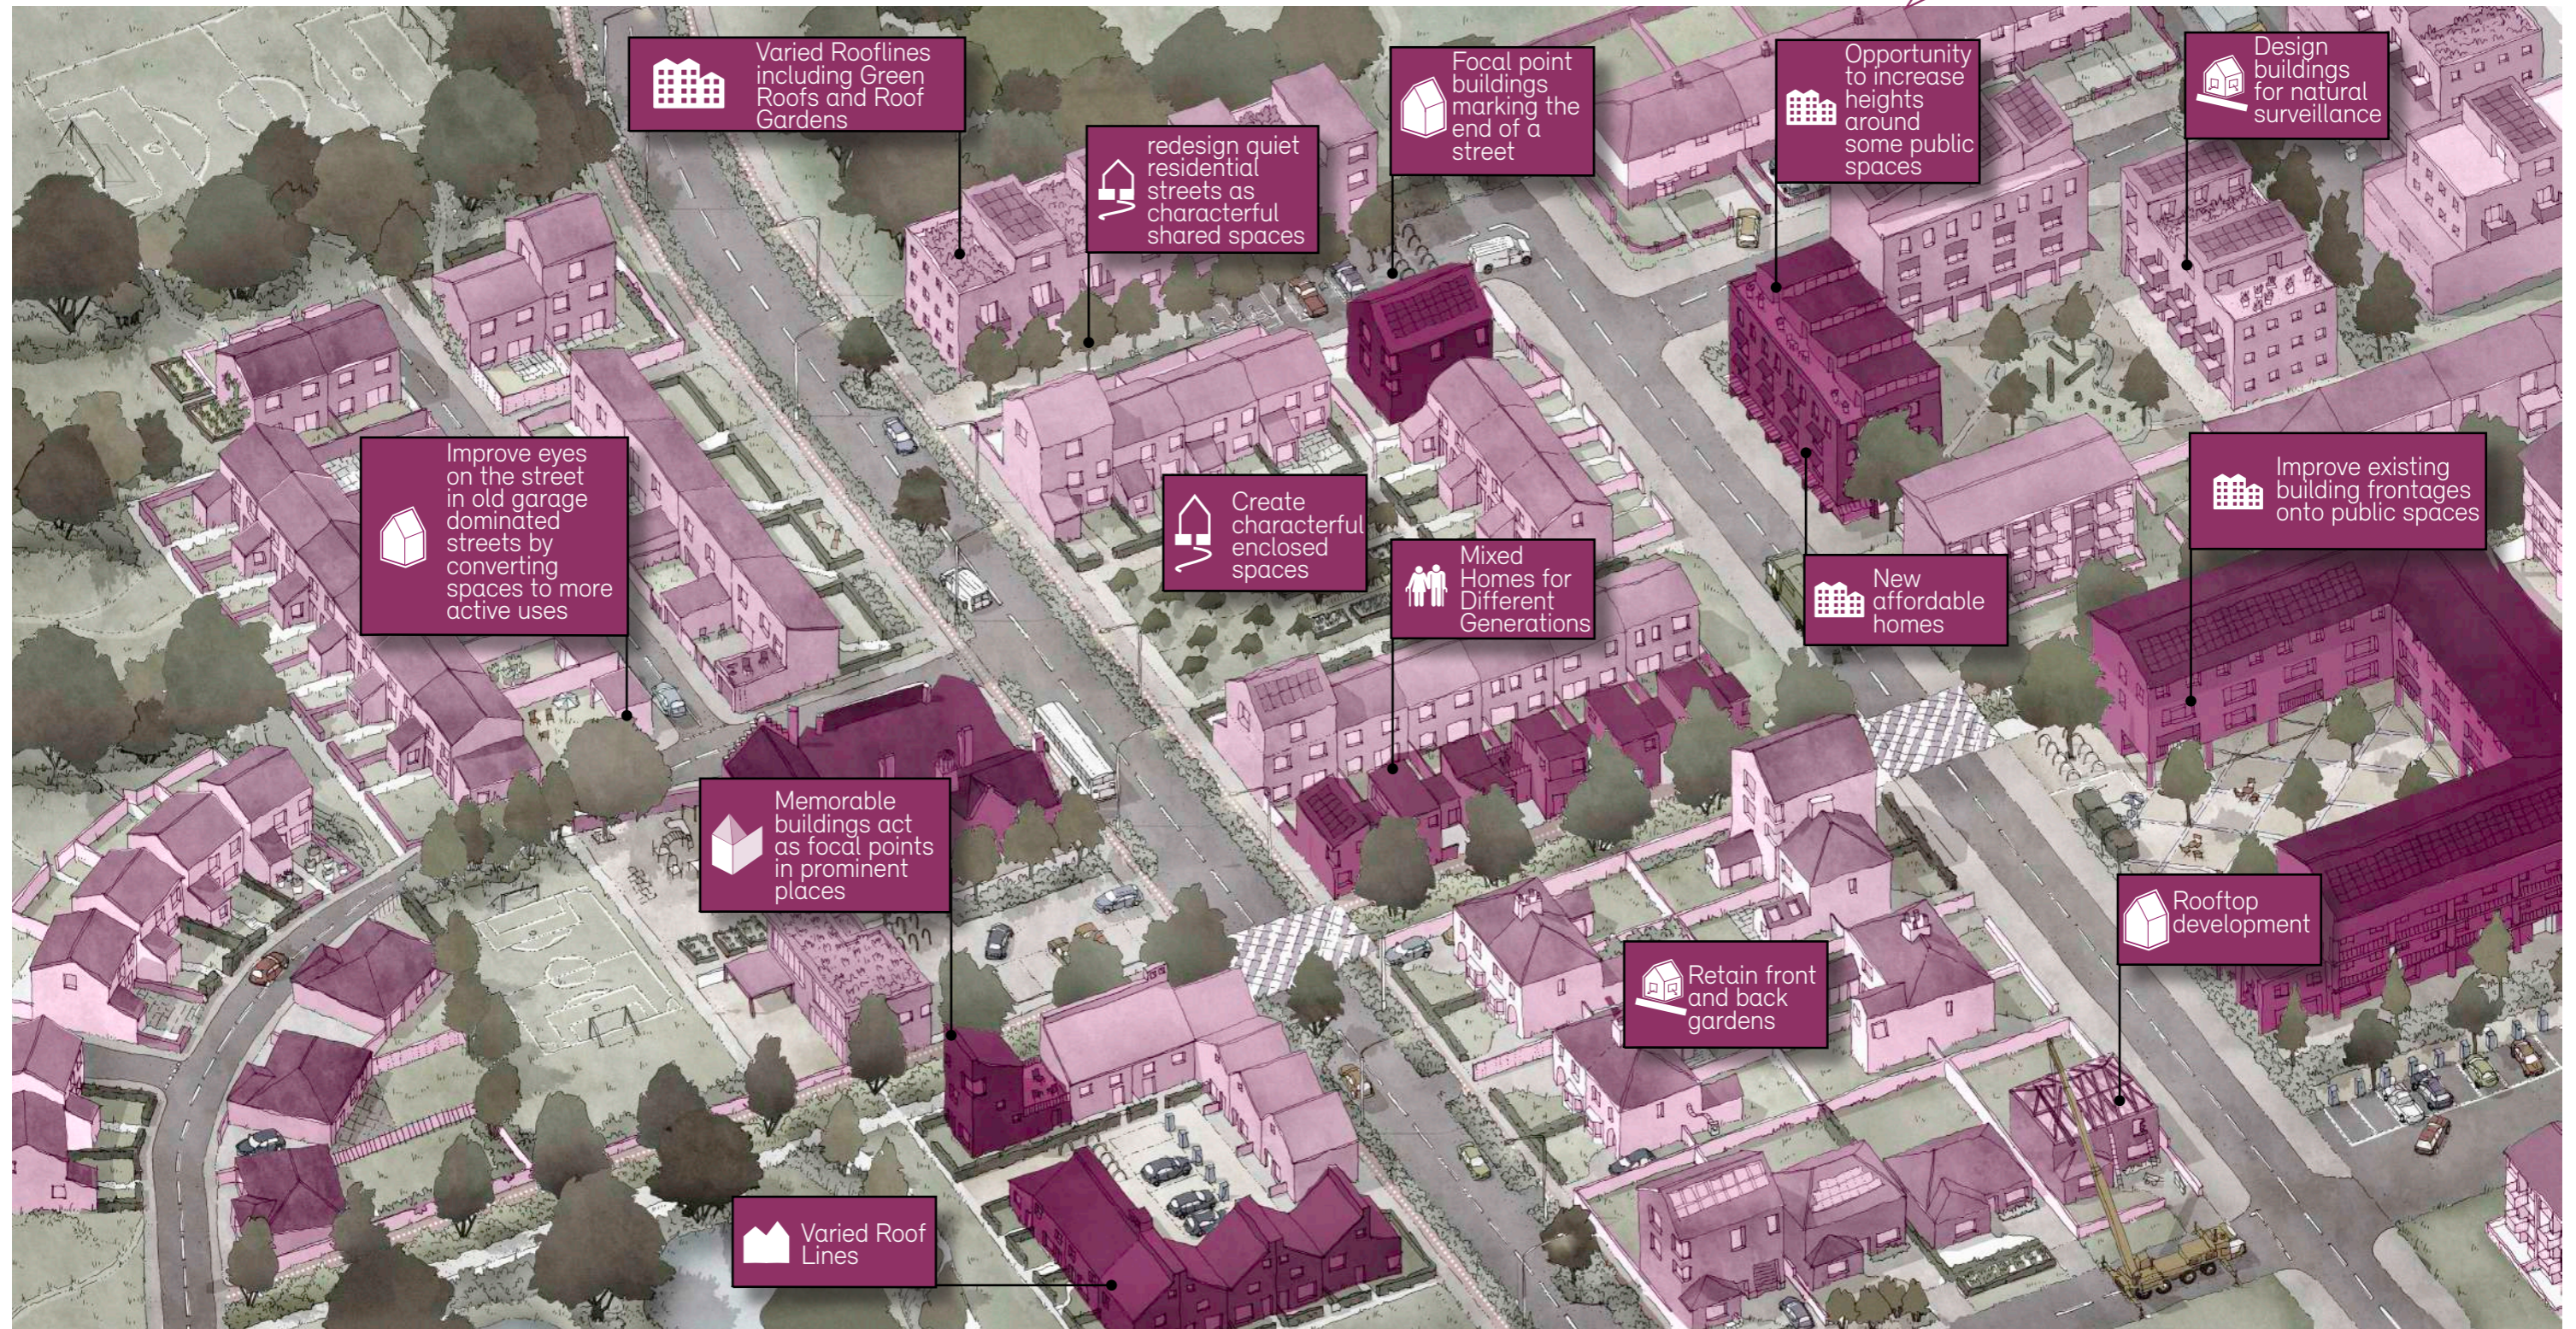



Image shows hypothetical street scene only to illustrate design requirements

Placemaking Opportunities

The plan opposite identifies key opportunities for strengthening sense of place. These areas combine opportunities to enhance frontages, routes, quality of public space and urban greening.

Priorities include:



- Ensuring public spaces and parks are framed with attractive active frontages and eyes on the street
- Creating focal points for prominent places/activities
- Combining community and other non-residential uses with new homes to make sustainable mixed use places
- Use building design to improve visibility and accessibility in areas with poor access including Nuns Way and Kings Hedges recreation ground.
- Combine improved building frontages with walking and cycle routes, urban greening and tree planting.

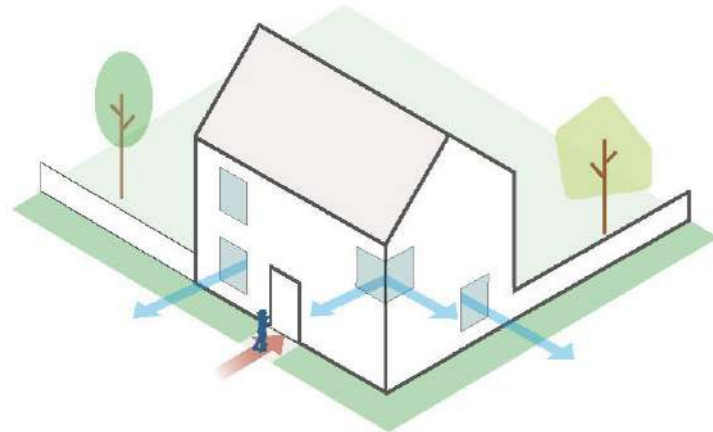

Create new enclosures and frontages with eyes on the street to give each home, building or community use a pronounced street facing identity.

KEY

- Major connecting routes
- Public spaces and parks
- Code boundary

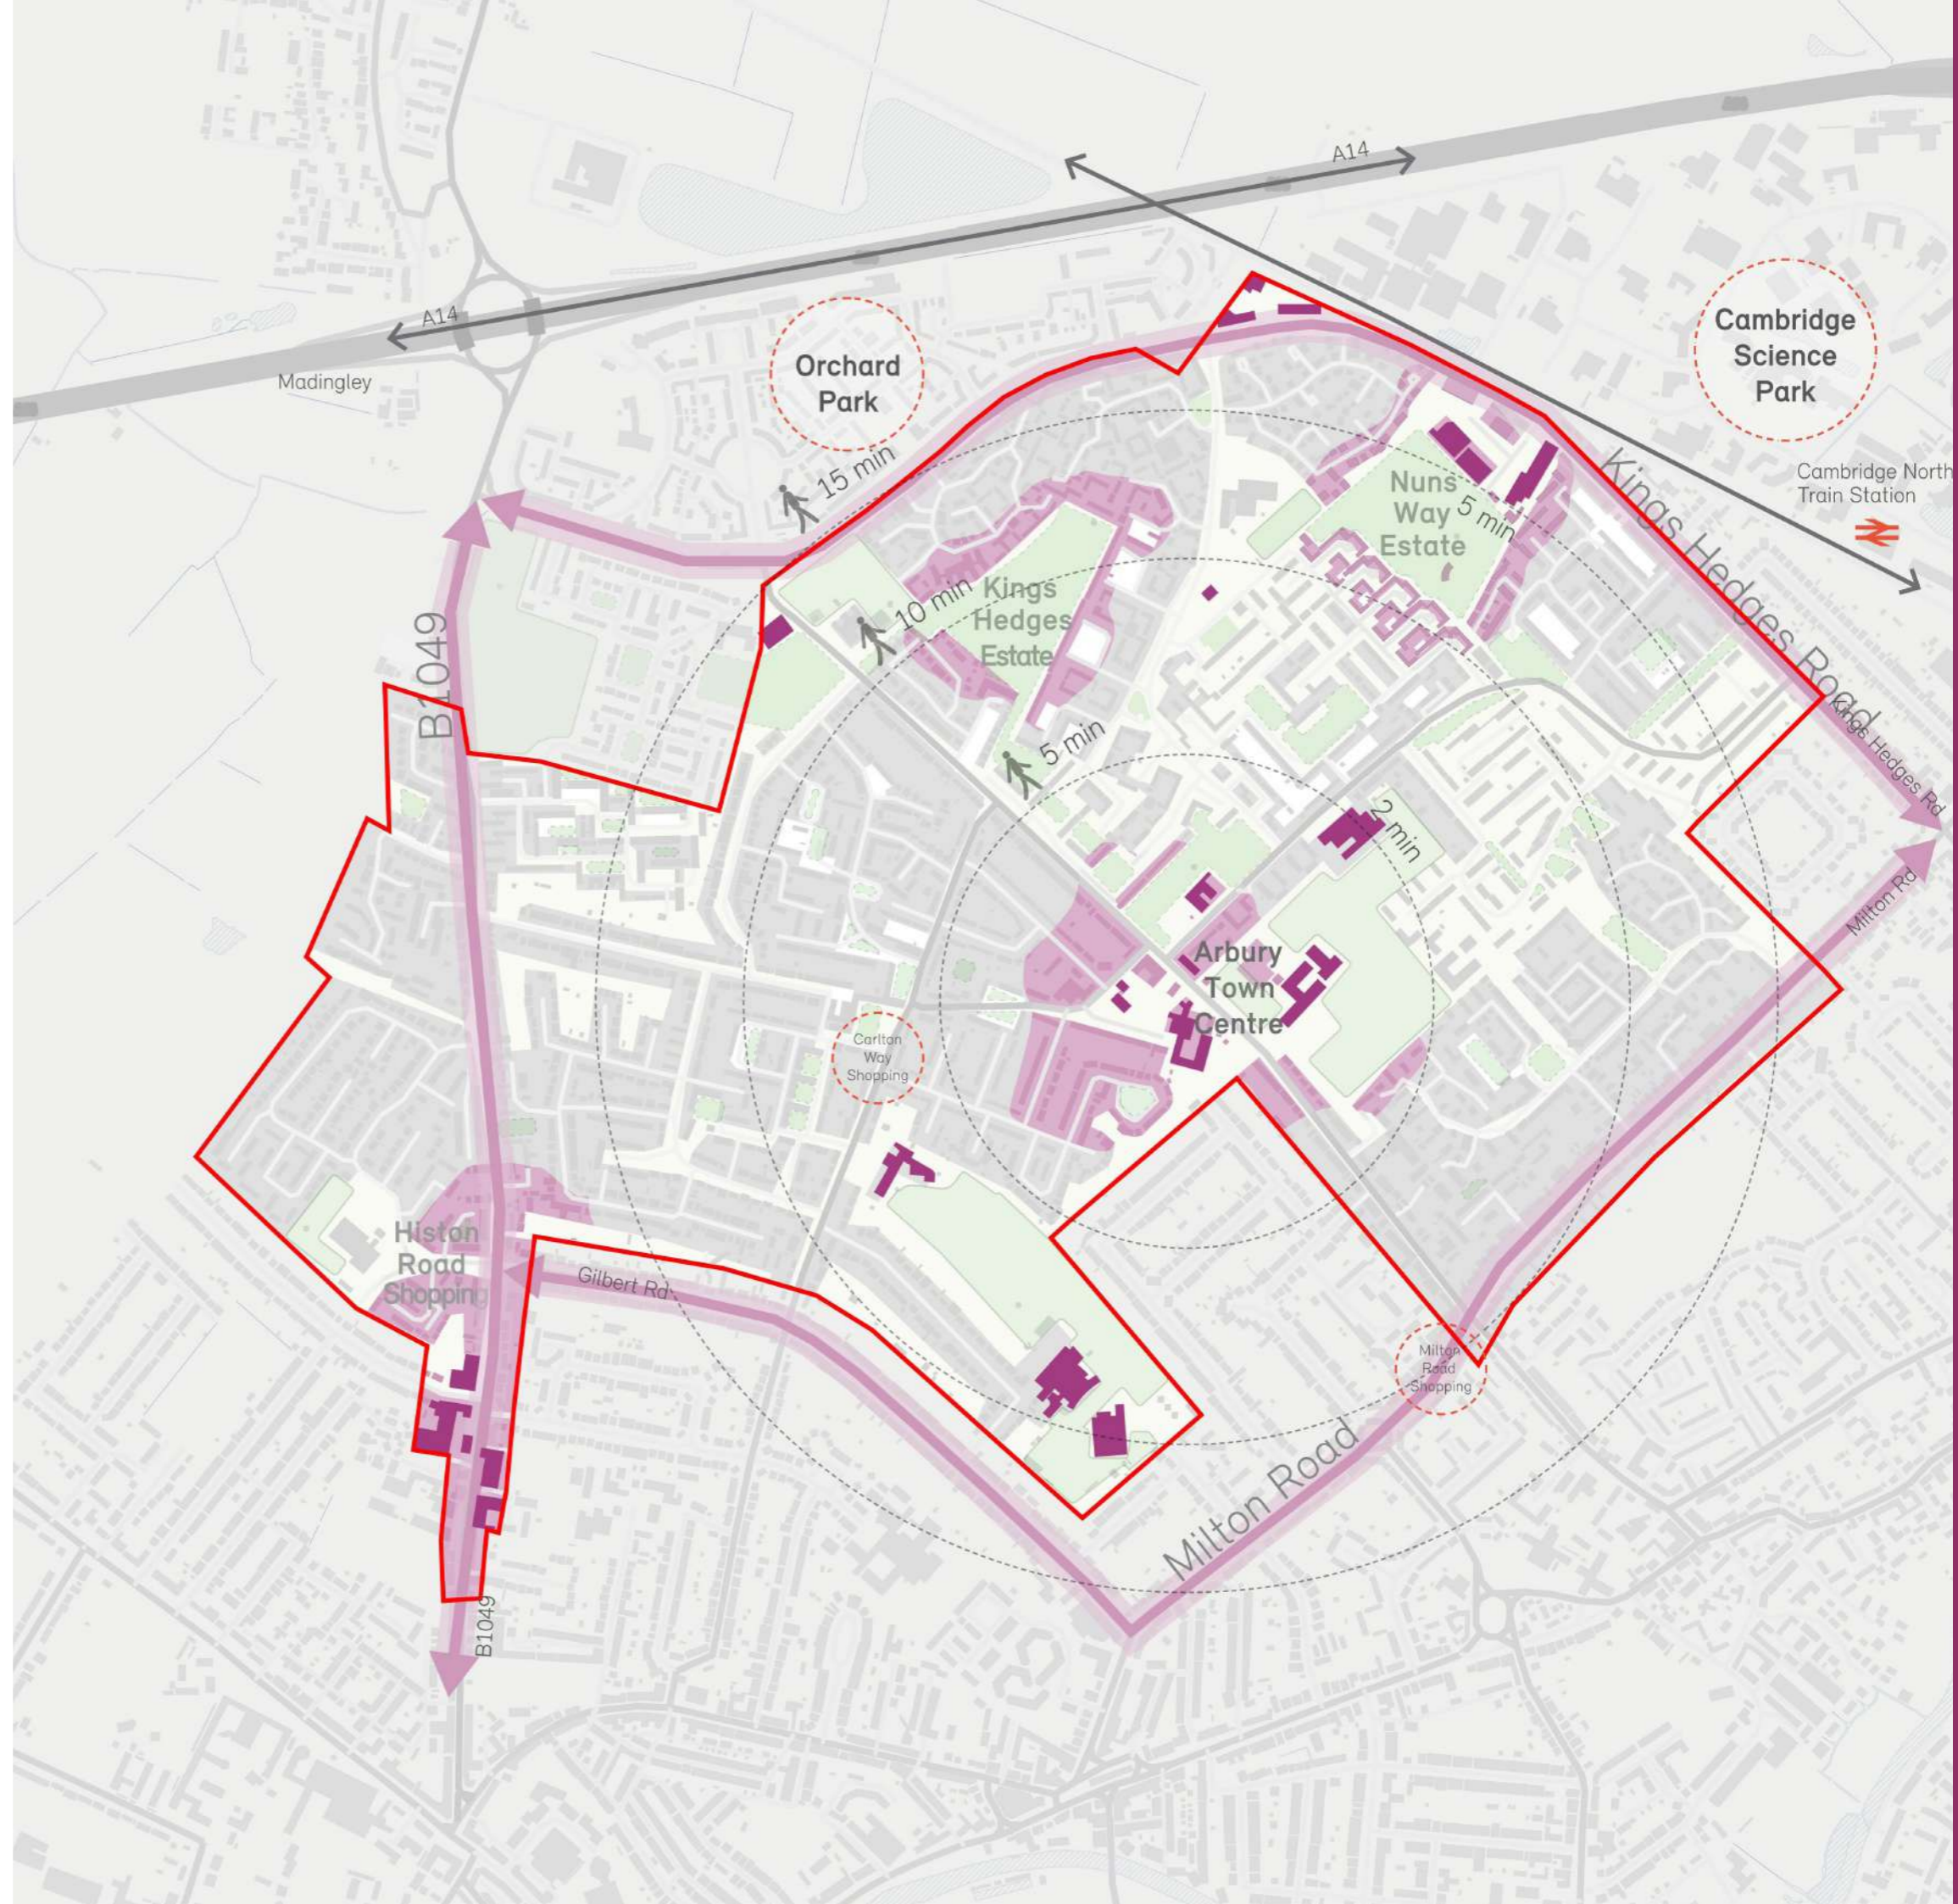

Identity of Home

"create a piece of multipurpose sculpture that acts as a seating area and play structure"

Resident comment via interactive map

What is it and why is it Important

Never forget that every "unit" is somebody's home and look to improve existing homes as well as providing better new ones. The identity of the home can be part of a shared group, for example a composed design of buildings looking on to an attractive green space.

Must:

- Every new home must have access to a usable private or private shared garden, roof garden, or balcony (policy 50).
- To promote health and wellbeing homes must have views or close access to significant natural features such as tree groups, raingardens and green spaces (Policy 71).
- To ensure development quality is captured at planning stage, critical details and description of materials must be provided as part of building design reserved matters applications, including:
 - Window reveals, sills and heads
 - Roof eaves and verges
 - Decorative features

Should:

- For new buildings, front doors and building entrances should be included that are visible from the street or public space (Policy 56e).
- Incorporate planted or hedge thresholds for new homes and maintain areas of planted front gardens and hedges during works to existing properties.
- Use sympathetic design and material treatment to subtly highlight important features such as entrances, windows, or create appropriate focal points.
- Test proposed external materials and important details by constructing sample panels.

Resources


- DLUHC National Design Guide
- Cambridgeshire Quality Charter for Growth



Remember that **every "unit" is somebody's home**



Establish **quality** materials and details at the planning and pre-construction stage

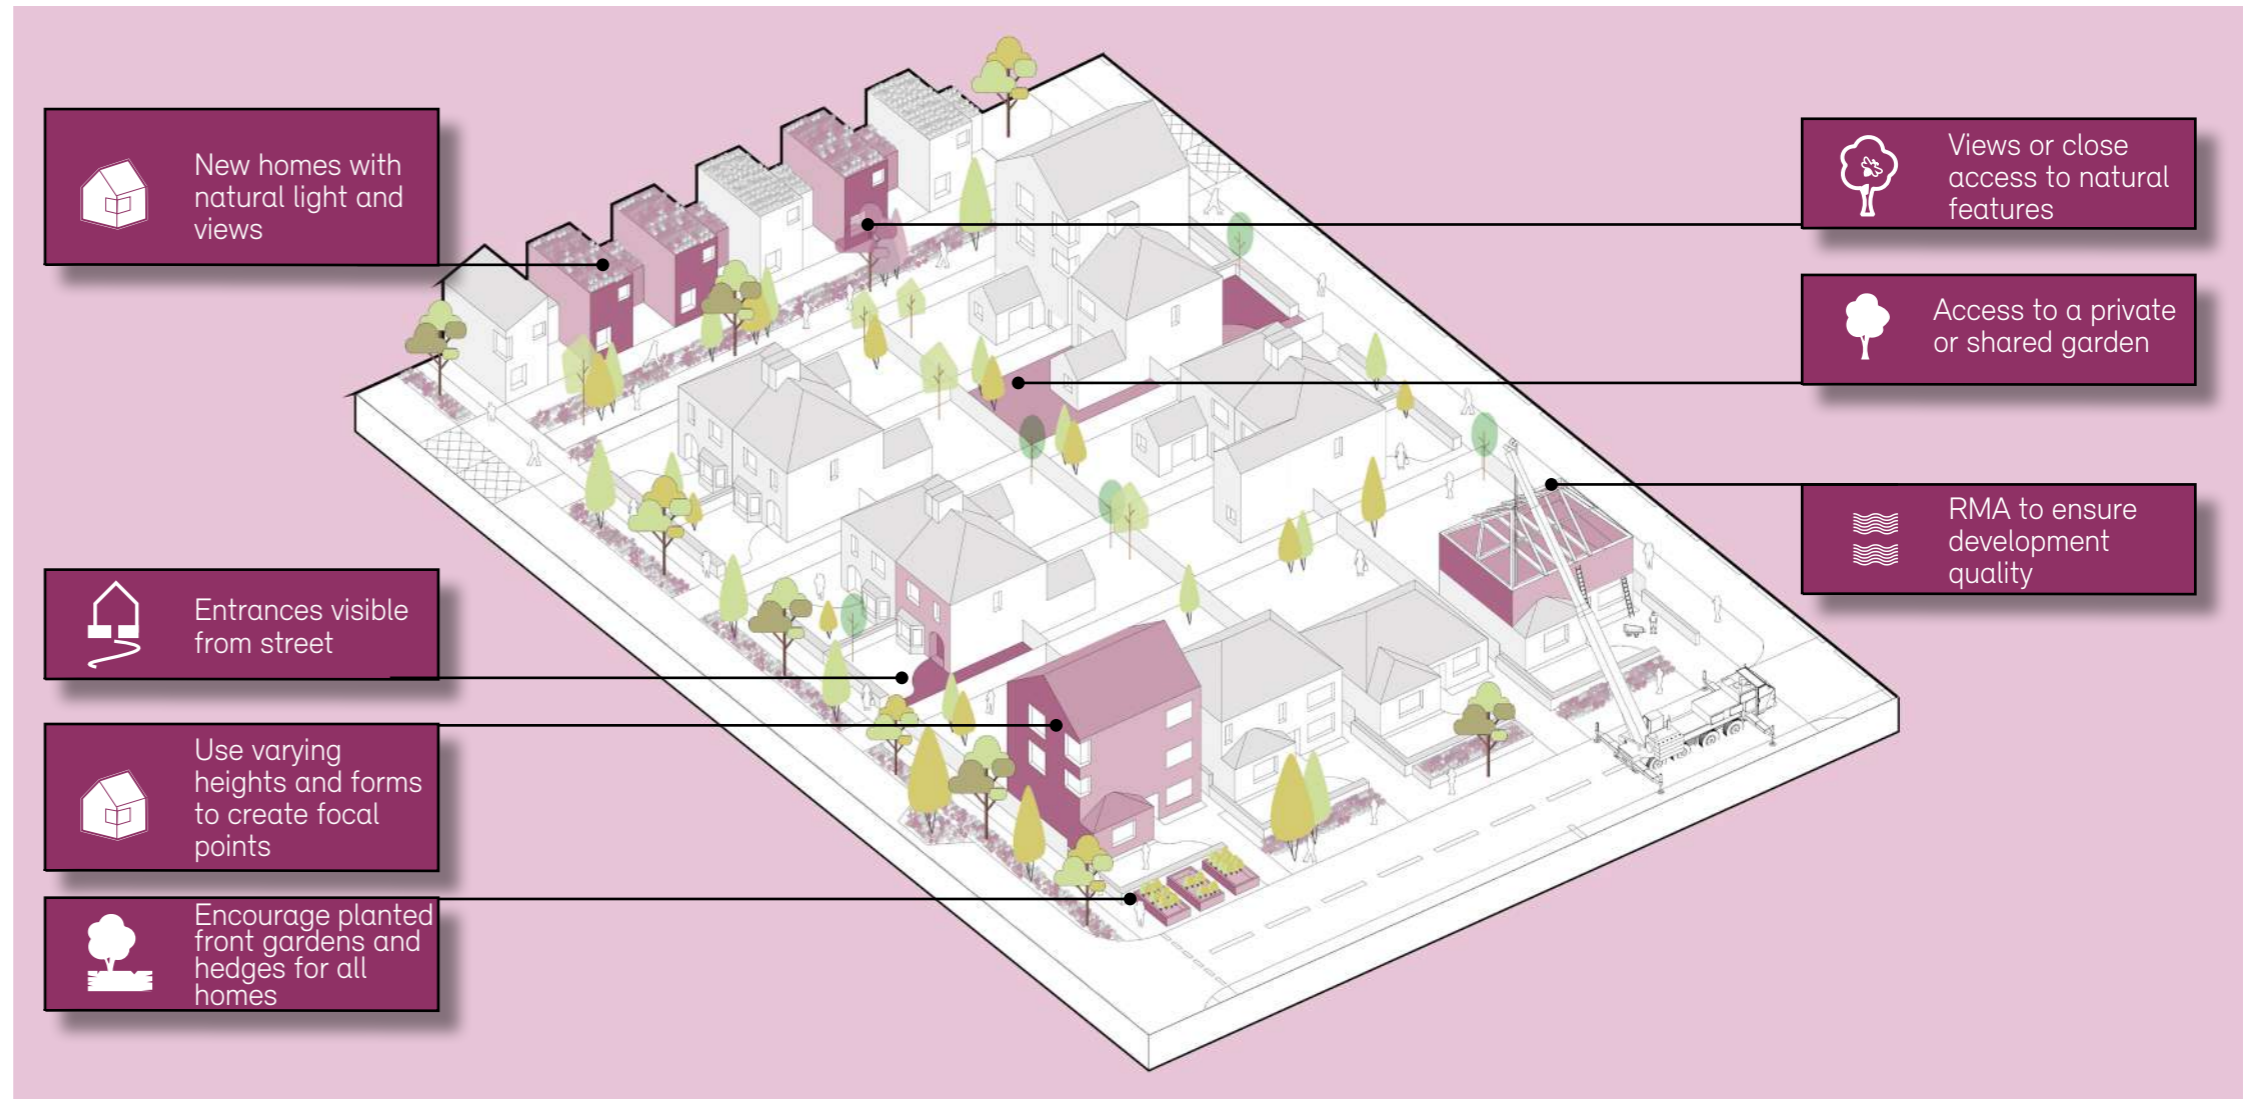

Illustrative diagram showing Identity of home principles



Mixed Homes for different generations, **Colby Lodge, London Borough of Waltham Forest, Pollard Thomas Edwards**



Homes that have views or close access to natural features, **New Ground Cohousing, London Borough of Barnett, Pollard Thomas Edwards**



Entrances visible from public spaces, **The Avenue, Pollard Thomas Edwards**

Enclosure and Focal Points



Improve **natural surveillance** on all routes and public spaces



Co-design new developments by **engaging** with local people early

What is it and why is it Important

Streets and spaces need to be lined with attractive building frontages and hedge boundaries to provide well defined public and private spaces. Design can be used to help way-finding by creating memorable buildings and landscapes with distinctive tree planting or composed clusters of buildings and frontages.

Must:


- Provide a continuity of frontage by connecting plots together with walls and hedges to give a sense of enclosure onto the street and public spaces (Policy 56a).
- Emphasise “eyes on the street”. Layouts must provide natural surveillance with front doors and windows for active uses for example living and dining rooms and kitchens facing onto streets and green spaces. (Policy 56d, 57b).
- Large developments must be shown to be composed as a group that works alongside existing neighbours to contribute to a distinctive sense of place (Policy 56a).
- Seek to provide way-finding at the planning stage. Show how signage, buildings, and urban design will combine to help people navigate the area (policy 65).

Should:


- Create special places and moments. Identify opportunities for legibility with memorable trees, buildings, and clusters of building frontages when working at junctions, landmarks, flagships, introductions or destinations.
- Future projects should seek to improve existing rear garage courts, large parking areas, and rear service areas with landscaping and new frontages. For example, tree planting, amending existing frontages, or providing new mews homes that help enhance safety natural surveillance (policy 55, 56, 59, 71).
- While retaining enclosure seek to incorporate some gaps in buildings and dense trees to provide depth of views with glimpses of buildings and landscapes beyond the street.

Resources

- DLUHC National Design Guide
- Cambridgeshire Quality Charter for Growth

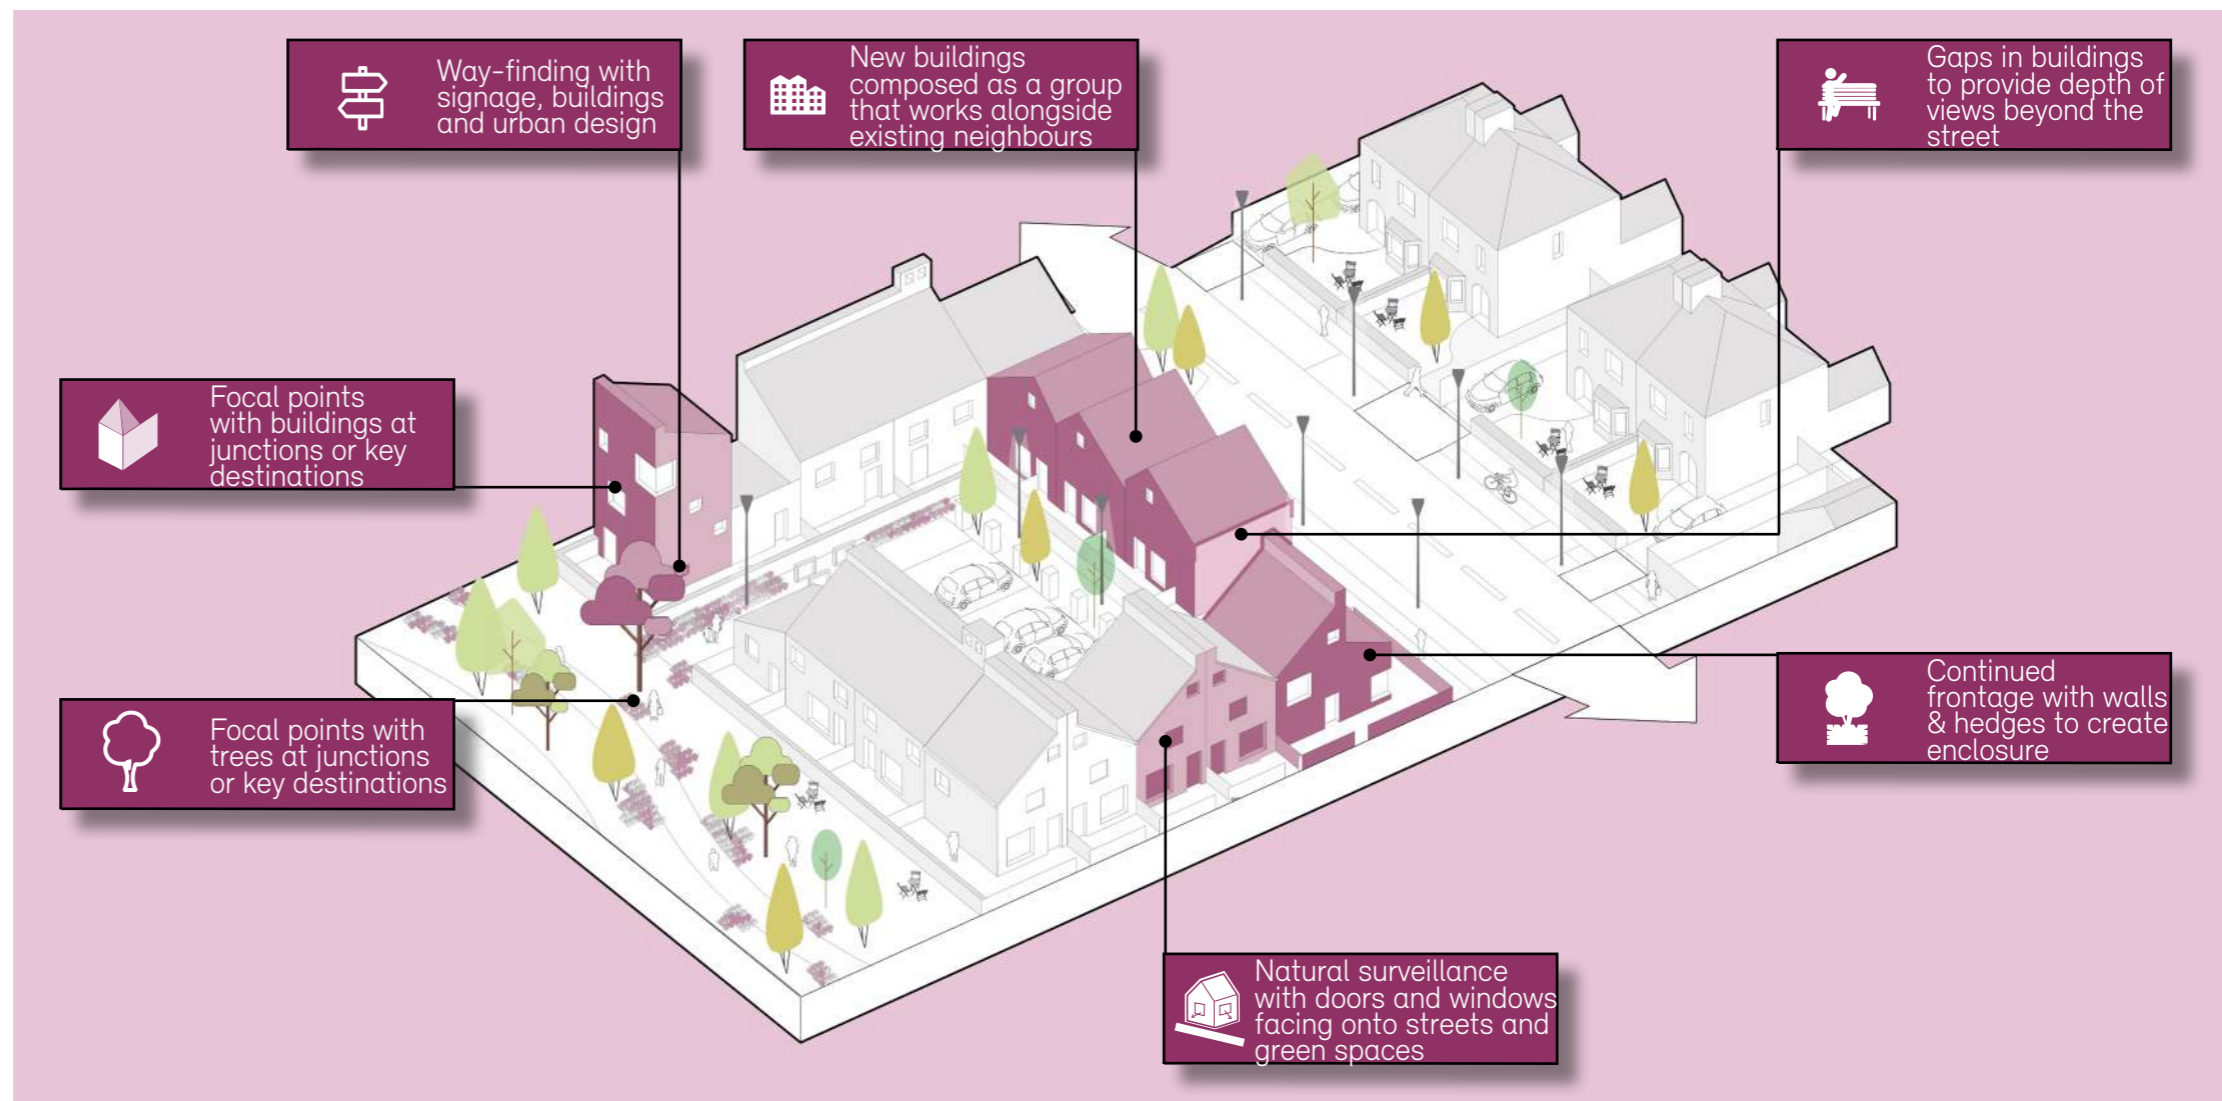

Illustrative diagram showing enclosure and focal point principles

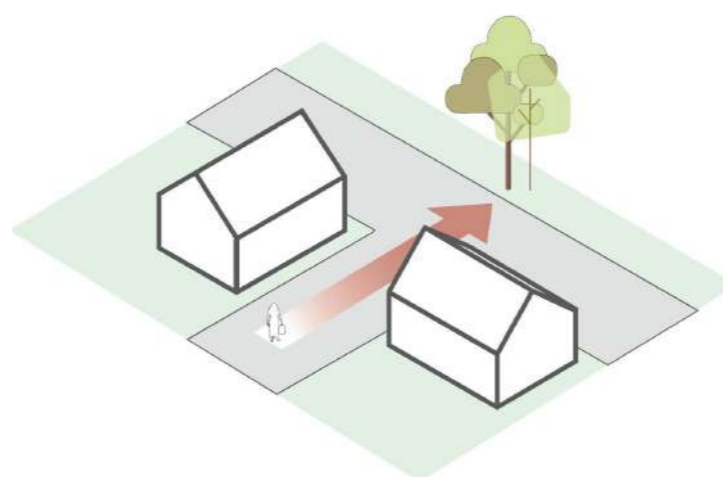

A carefully located tree can contribute to more than one street and view
Design Code, February 2024



Homes that combine to create a continued frontage, **Woodside Square, London Borough of Haringey, Pollard Thomas Edwards**



Suburban home creating a focal point at the end of the street, **The Avenue, Pollard Thomas Edwards**

Scale and Form

"A reasonable step-back on new multi-story buildings, their impact can be lessened"

Resident survey comment



Apply **20% biodiversity net gain** on all developments. Prioritise on-site landscape improvement to maintain leafy character.



Significantly **increase natural surveillance** on poorly overlooked "garage" streets

What is it and why is it Important

The neighbourhood needs to maintain a domestic scale of building with an emphasis on gentle density principles when handling variation in height and scale.

Scale and form of buildings is important in terms of design as it provides a sense of identity for the home, both at the scale of the individual home, its role in the street, and a group of homes where this is appropriate.

Must:

- Heights must retain the low-mid rise character of the area in which buildings range from 2 up to 6 storeys.
- Scale and form must be carefully composed and demonstrate through drawings and/or models to show relationships to nearby buildings, spaces and routes providing justification for any increase in height, scale and form i.e. creating a focal point for a street, to highlight corners and junctions, or overlooking public spaces.
- Buildings with large footprints, such as apartment buildings, must be composed as part of the wider area and demonstrate how they avoid creating a bulky appearance on the skyline, for example by incorporating stepping and varied rooflines. (policy 60)
- Must avoid dense clustering of tall buildings (policy 60)

Should:

- Larger developments should include varied rooflines such as combinations of green roofs, roof gardens and tile sloping roofs where appropriate.




Illustrative diagram showing scale and form principles



Car-free street with building's overlooking green spaces, **Abode, Cambridge, Proctor Mathews**



Varied roofline and use of roof terraces gives harmonious variety to the street, **Woodside Square, London, Pollard Thomas Edwards**

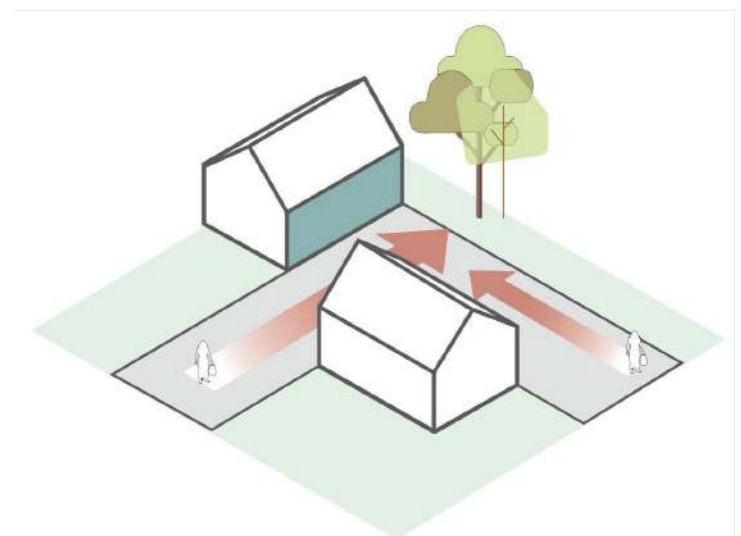

Identify views and vistas at an early stage to help locate memorable focal point buildings and important landscape feature such as large trees

Resources

- DLUHC National Design Guide
- Cambridgeshire Quality Charter for Growth

Dos and Don'ts

"No good making improvements and then just sitting back. Continued upkeep needed."

Resident survey comment



Provide **new homes** with **no loss of protected green spaces**



Apply **all code principles** for all large planning applications

Do:

- Face the street. Design buildings at street corners that celebrate their location and where both street elevations are treated as important frontages.
- Incorporate green roofs and roof gardens to help offset loss of associated green spaces when extending or developing buildings
- Seek to provide a proposal that will age well, be maintained and prioritise the use of natural and hard-wearing traditional materials for example using brick, tile, and quality timber.
- Use thoughtful architecture to create enhanced character while maintaining privacy to neighbours in constrained areas, for example by modelling buildings at upper floors or including angled windows to avoid unwanted overlooking.
- Incorporate simple quality details for example deep full brick reveals to windows. Such modelling can help shade openings and reduce the need for other shading to be added.

Don't:

- Avoid stretches of repetitive blank or near blank façades and flank ends to buildings. This is to provide eyes on the street, but also to create varied and characterful frontages at a human scale.
- Avoid generic clip-on details that do not reflect the character of Cambridge or the neighbourhood. This is to encourage high quality, long lasting, and quietly contemporary detailing on all new buildings.
- Avoid high-level window sills to living spaces that cut off views of gardens and street life.
- Remember to design-in the impact of modern thick window frames on small window openings, which can unintentionally reduce available light and views. Because of this it is usually best to keep window design and openings generous and simple.
- Avoid erosion of character in building details. When replacing roofs, windows, and doors aim to retain sympathetic original designs. Most buildings, even apparently simple ones, are composed designs, and so the details matter to keep them looking attractive and aging gracefully. If your home is missing detail, you can often see original designs on neighbouring properties.
- Avoid the loss of characterful uses where the prevailing use of the site is unique or positively contributes to the area.




Illustrative diagram showing do's and don'ts



Avoid poor quality pastiche building products
Design Code, February 2024



Avoid visual clutter from building services and service boxes

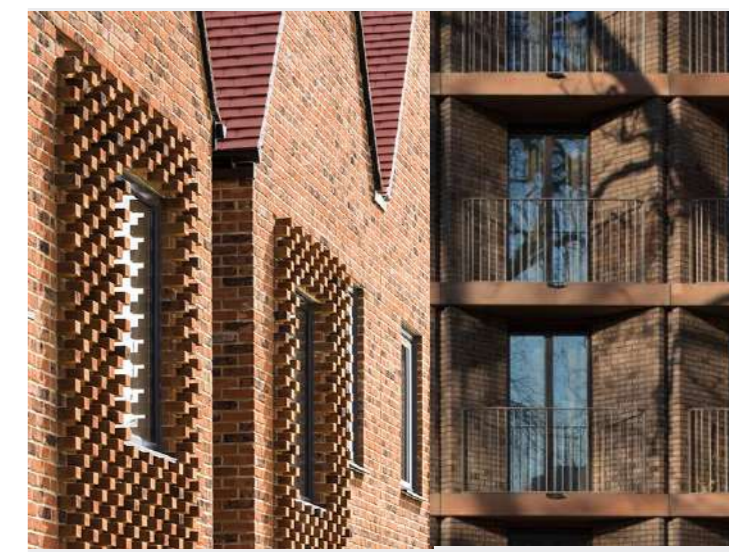

Incorporate simple quality details to make every home feel special

5 Increase Sustainability

Take opportunities to reduce energy use and carbon emissions, generate clean energy, and improve health and wellbeing for residents – both at home and around the neighbourhood.

When designing new developments plan to reduce whole life carbon by improving and reusing existing buildings, recycling elements, and using low carbon renewable materials.

“Solar panels were mentioned and these are great, but more important are heat pumps for removing gas heating.”

Resident survey comment

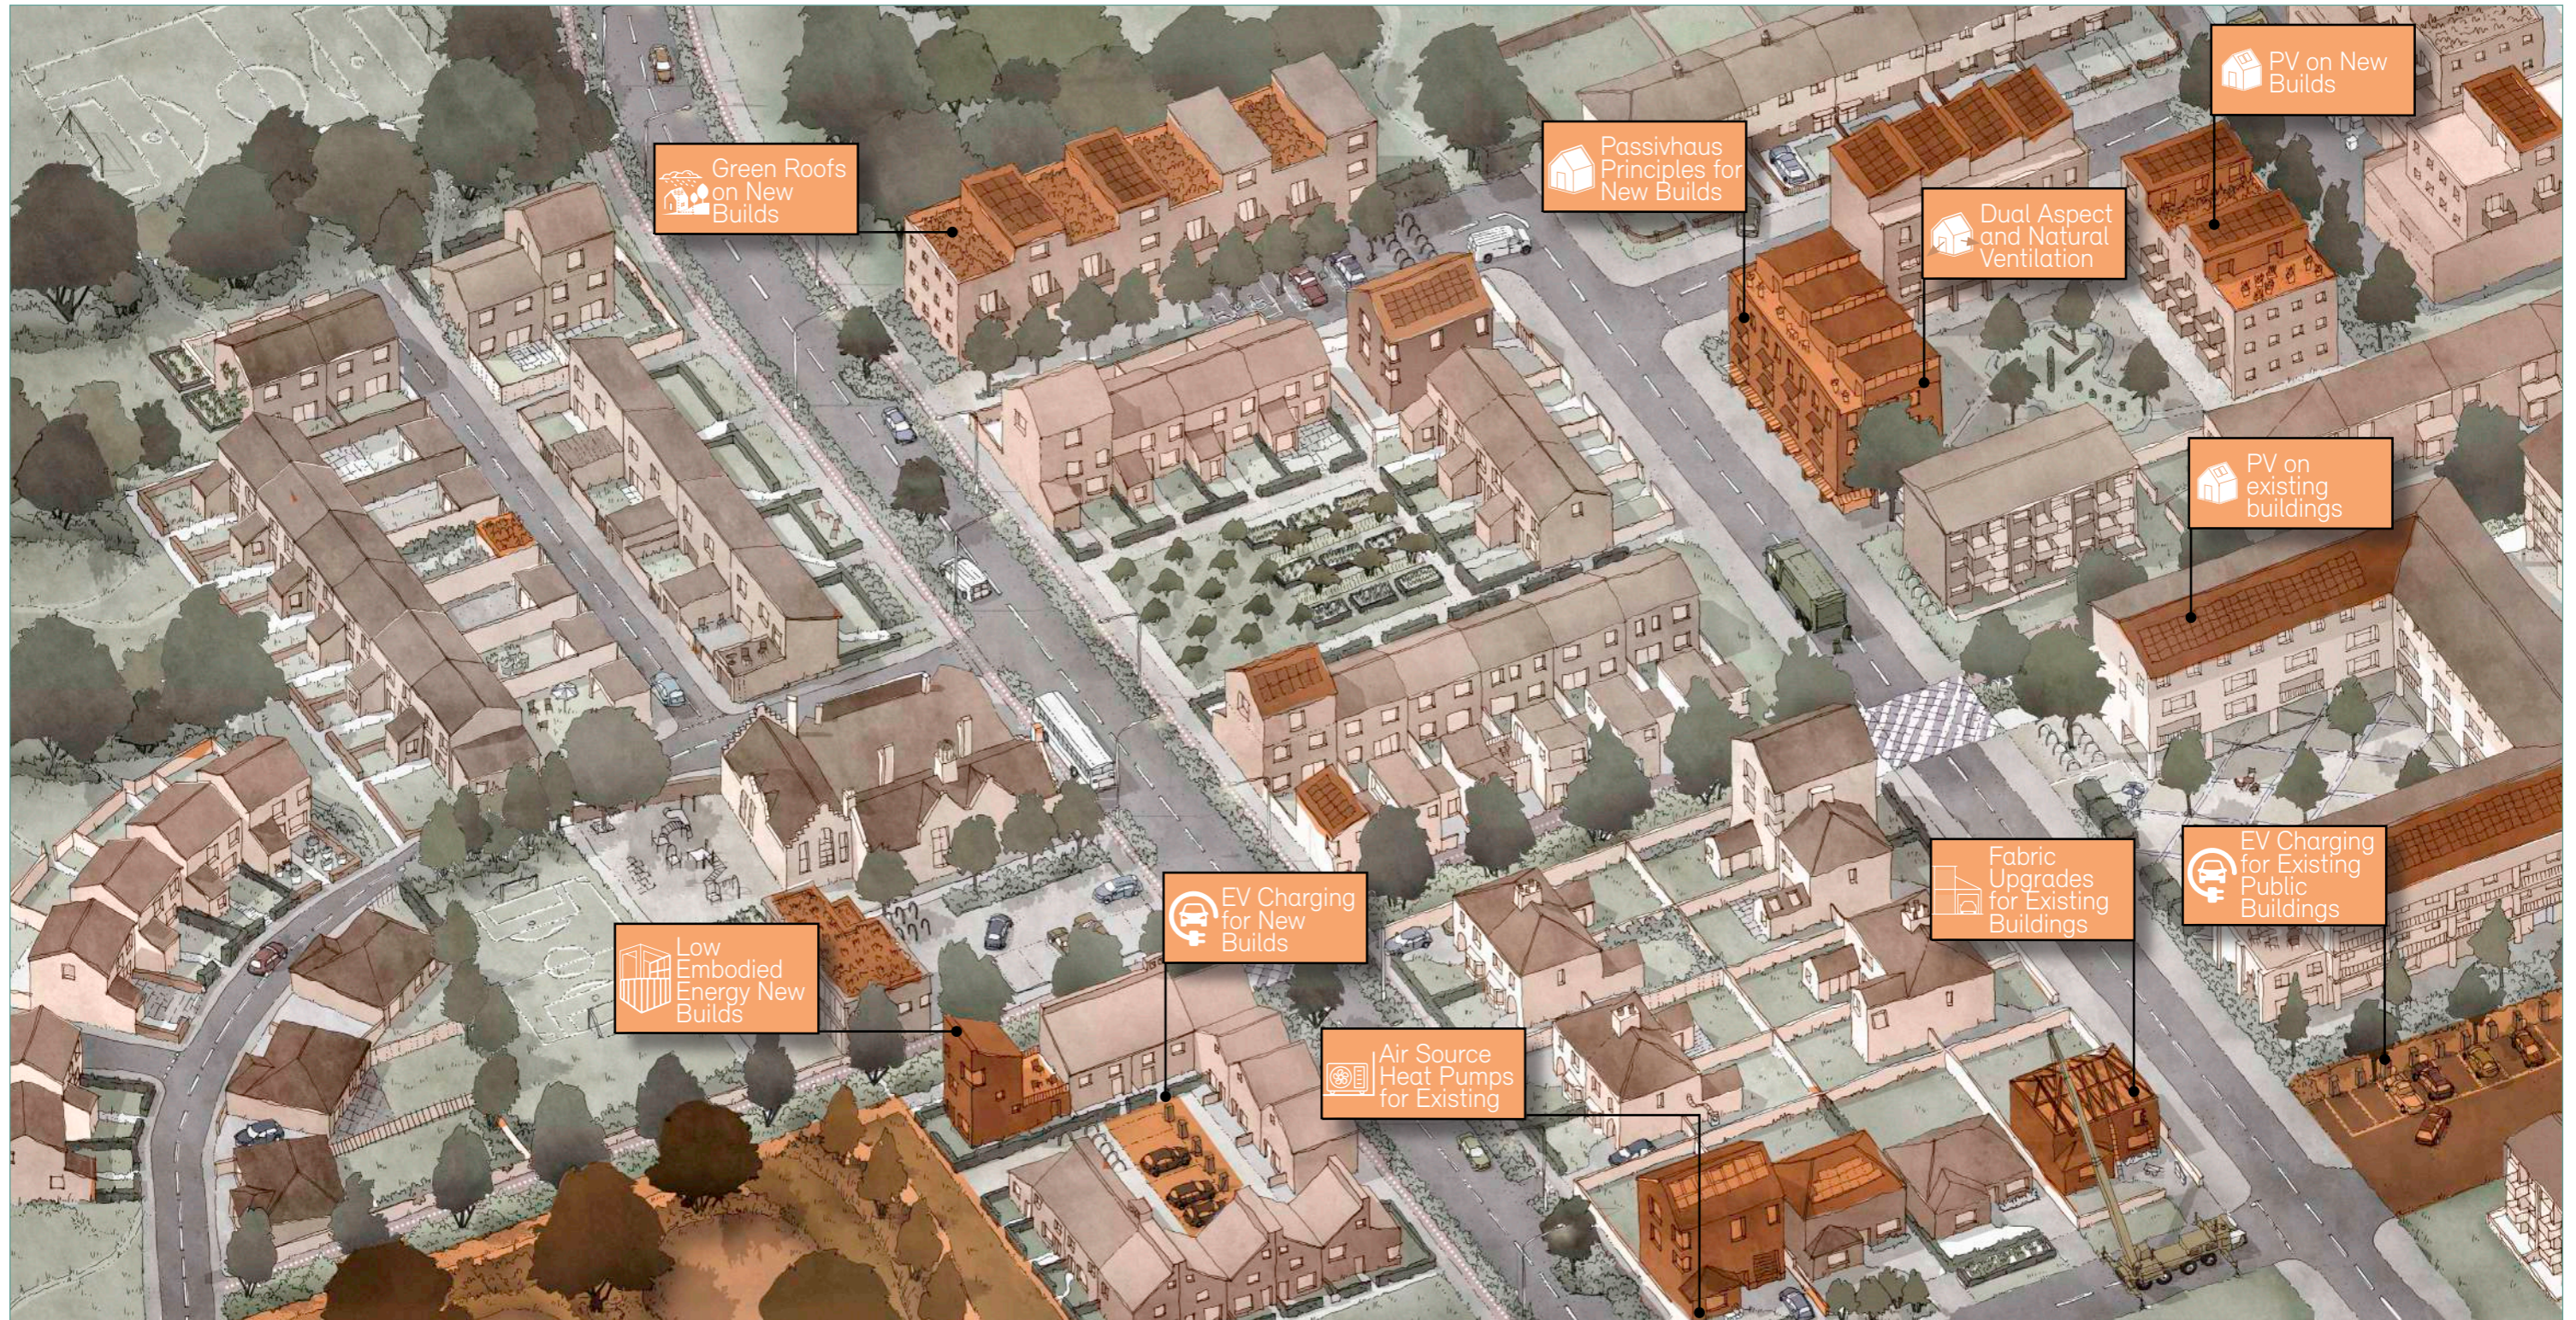


Image shows hypothetical street scene only to illustrate design requirements

Sustainability Opportunities

There is a general requirement to improve energy efficiency and help reduce the urban heat island effect that is a legacy of the post-war buildings and streets in the area.



Existing information for similar structures suggests that many of the estate buildings are reaching the end of their original design life, and would require significant uplift to meet modern standards. Many homes are also in private ownership and it is likely these will also require upgrading over time. We have included a householders guide to improvements and links to further information as part of this section.

At the same time as the houses and flats were constructed, the surrounding streets and trees were laid out and planted, and this also creates similar challenges of aging or outdated infrastructure and spaces, and a lack of urban greening highlighted by the "shady Streets" study.

Darker orange on the plan opposite identify possible priority areas:

Priorities include:

- Improving home energy efficiency and reducing bills. The plan shows in shades of orange publicly available data for the EPC (energy performance certificate) ratings for the homes within the area. Pale orange indicates homes with EPC ratings of C and above. The darker colours rate indicate poor or very poor ratings of D to G (around 50% of the homes are in these categories).
- Where significant uplift is required, home energy and environmental health improvements may be delivered through combinations of 'deep retrofit,' mixed new and retrofit development, or with new homes. It is essential that these options are explored working with residents themselves.
- Tackling the urban heat island effect with improved tree canopy cover. The red hatched areas show streets that to prioritise, which currently have little or no shelter from tree canopy.

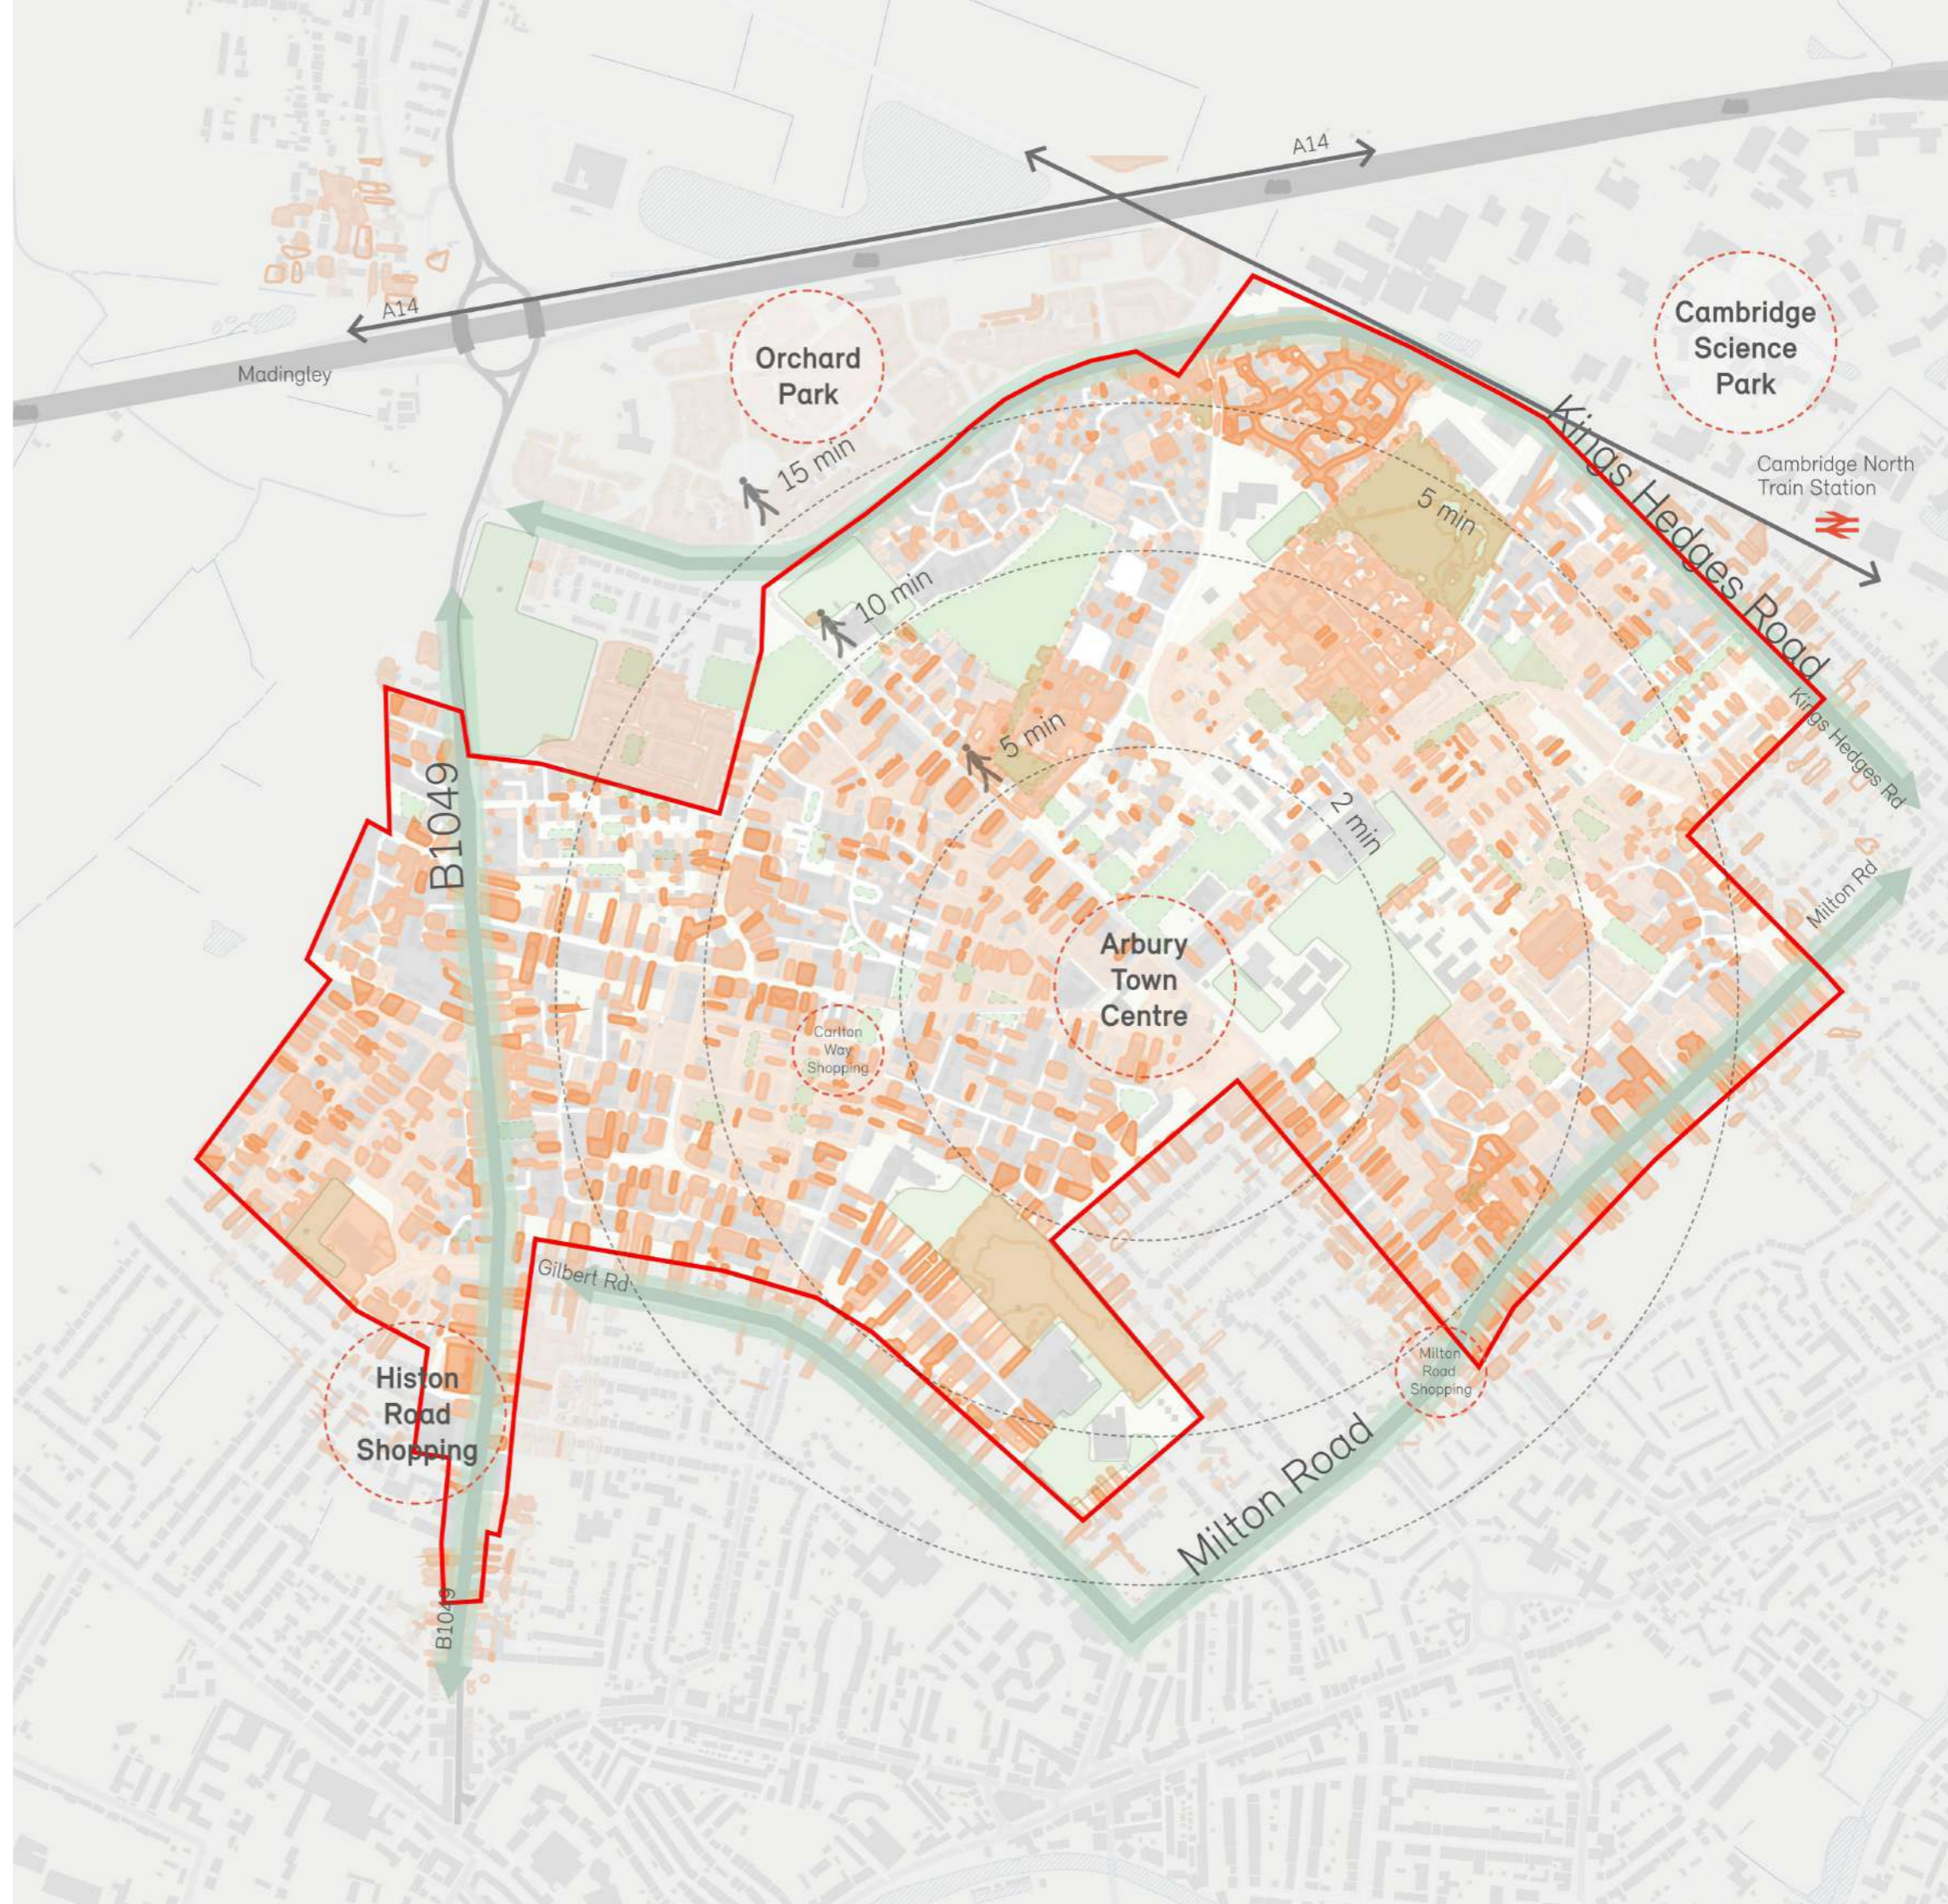

Highly Sustainable New Buildings

"My part of this neighbourhood is too old now to be enhanced, it needs serious redevelopment"

Resident comment via interactive map



Calculate **whole life carbon** for larger new developments



Target **100% dual aspect** for new homes wherever possible

What is it and Why is it Important

The requirements here are primarily intended for new homes in multi-home developments. New homes are a once in a lifetime opportunity to provide better living spaces that efficiently meet the need for more homes without new greenfield development, use fewer resources, and have built-in resilience for the future.

Must:


- Avoid overheating homes. Dynamic thermal modelling for overheating must be carried out prior to detail planning submissions for all major developments of 10 homes or more. This is to promote a holistic approach to sustainable building design including installing shading for windows.
- All new-build homes must seek to provide dual aspect wherever possible, and demonstrate adequate access to daylight and sunlight where they are not. This is to help provide sunlight at different times of the day and support natural ventilation and cooling (policy 53, 57, 60)
- New development must incorporate water efficiency measures and follow the water neutrality hierarchy and conserve water with a maximum target of 100 L/pppd water usage for new homes (Policy 31).

Should:

- All larger developments (50 units plus) should calculate whole life carbon with the aim of significantly reducing carbon in their construction and operation. Carbon Methodology Reports are to be prepared to establish relevant targets (policy 28, 29, 30)
- All major developments should aim to provide at least 20% biodiverse planted green roofs. This is to help maintain biodiverse green spaces in the area and mitigate lost green space (policy 57, 69, 70, 71)
- All major developments should include post-occupancy evaluation (POE). This is to help check that developments are working well, and to learn lessons for future projects.

Resources

- The GRO Green Roof Code - Green Roof Code of Best Practice for the UK 2014
- <https://www.architecture2030.org/>
- <https://goodhomes.org.uk/news/shading-for-housing>
- LETI guidance www.leti.uk/

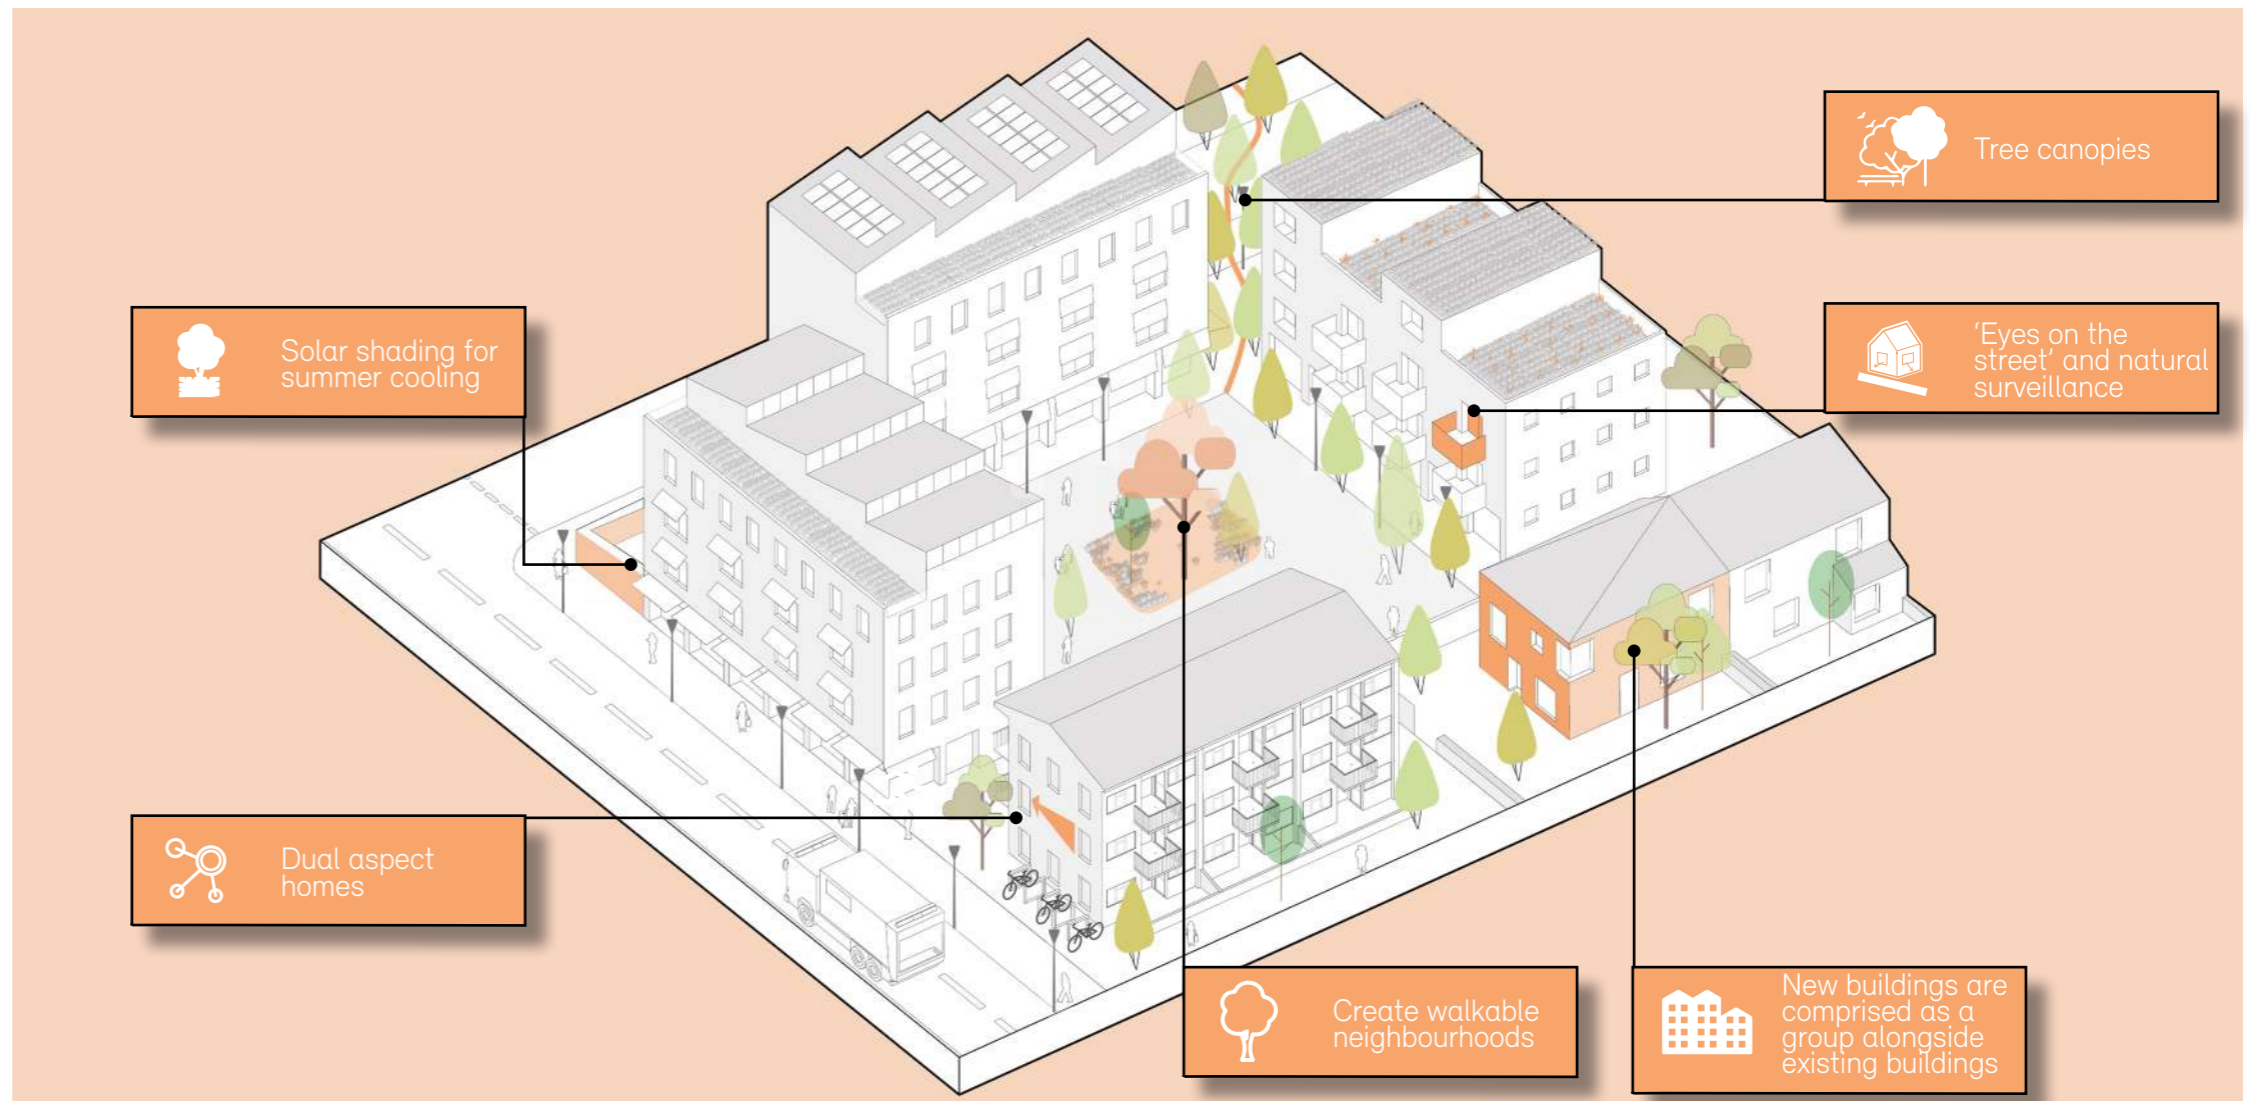


Illustrative diagram showing new building principles



Flats overlooking a secure shared garden **New Ground Co-Housing, Pollard Thomas Edwards**



Balconies for all upper floor flats, **Colby Lodge, Pollard Thomas Edwards**

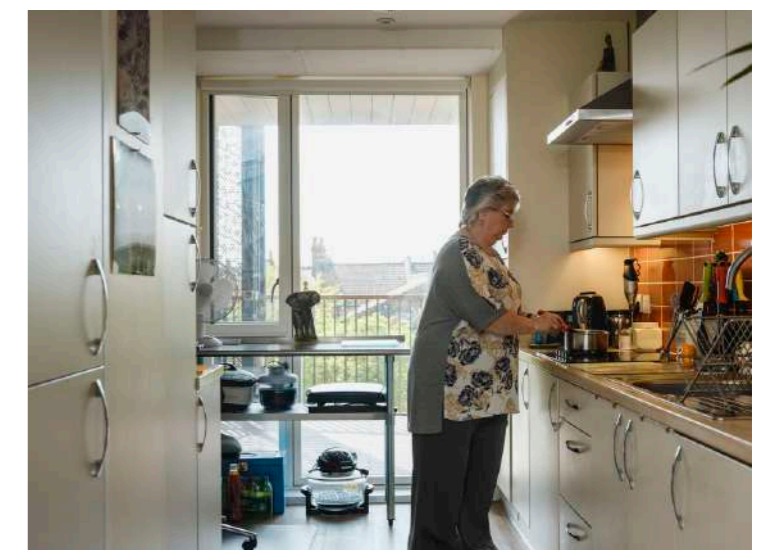

Dual aspect homes, **Colby Lodge, Pollard Thomas Edwards**

Generating Clean Energy

"Could the council consider a requirement for solar PV to be fitted on all new build properties?"

Resident survey comment



Include **solar shading** for windows to avoid overheating instead of reducing window sizes



Save water target 100 L/pppd for new homes

What is it and Why is it Important

Rooftop PV (solar) panels generate electricity for the home to use, or to be sold to the grid. Air Source Heat Pumps together with Mechanical Ventilation and Heat Recovery (MVHR) efficiently extract and heat from the atmosphere.

Only 4% of homes in the UK generate clean energy from PV panels, and even less have heat pumps.

With costs of fuels increasing, this code intends to encourage homes in the area to adopt clean new energy technologies.

Must:


- All new homes and buildings must be designed to follow the sustainable energy hierarchy (policy 1, 28, 57)
- All new housing developments must include an element of on-site energy generation through rooftop PV solar panels. PV panels can be successfully incorporated with a biodiverse planted roof (policy 1, 28, 29)
- Where Air Source Heat Pumps (ASHP) are visible from the street or other public spaces they must be appropriately screened (policy 55, 56, 57, 58)

Should:


- All new homes should be all electric powered and maximise opportunities to generate clean low-cost energy for the home.
- Install ASHP and MVHR (Mechanical Ventilation with Heat Recovery) to provide fresh filtered air into a building whilst recycling heat
- PV panels on existing buildings should be carefully arranged in neat and even groups to avoid visual clutter.

Resources


- Action on Energy Cambridgeshire - Action on Energy Cambridgeshire (actiononenergycambs.org)
- Open Eco Homes - Case Studies - Cambridge Carbon Footprint
- LETI www.leti.uk/cedg

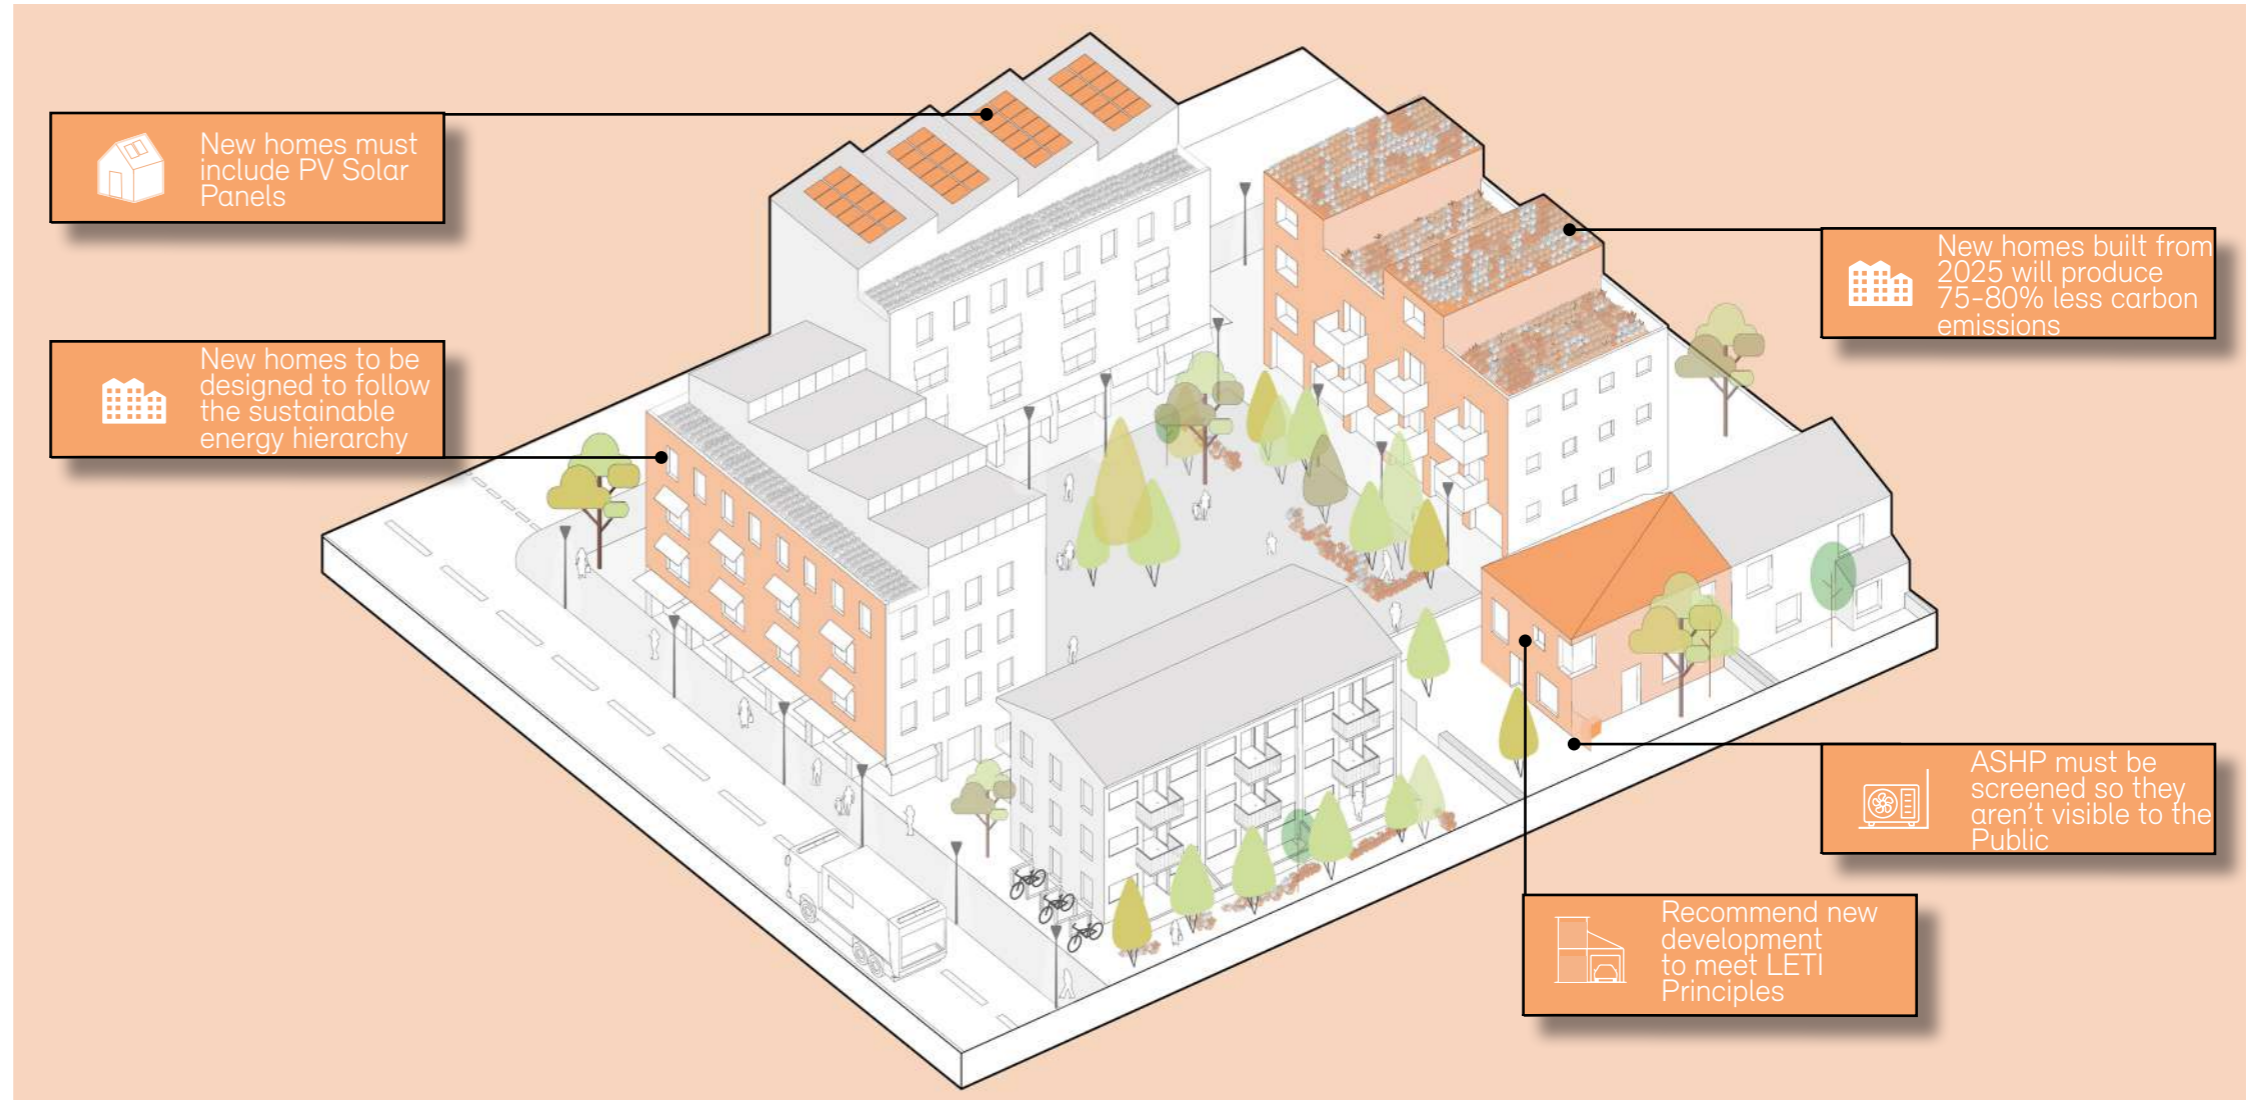

Illustrative diagram showing clean energy principles

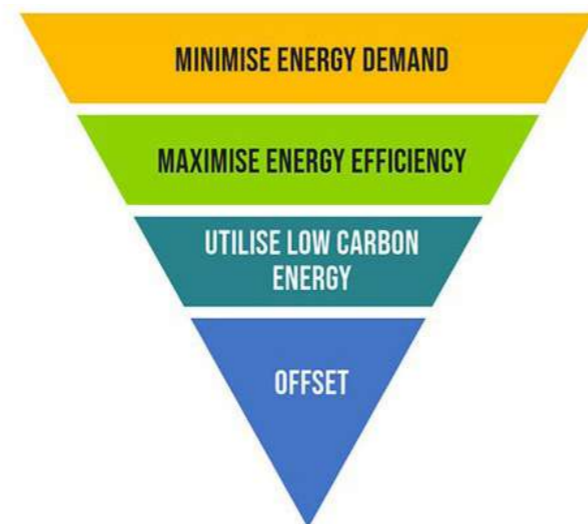

Sustainable energy hierarchy
Design Code, February 2024

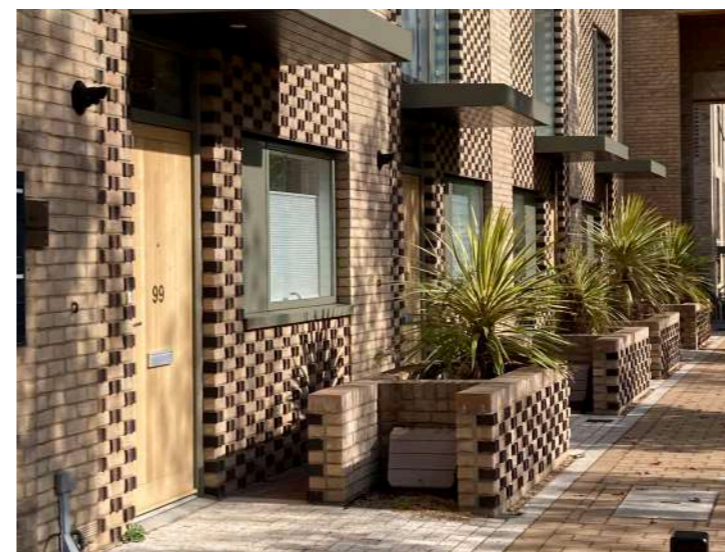

Patterned brick work expressing entrances and hiding services, **Abode**, Proctor Mathews




Screened ASHP integrated into Public-Realm, **Marmalade Lane**, William Green Architects

Climate Change Resilience

“Design with and by the community, not just for it. Enshrine and fund community co-creation in all aspects of planning and development.”
Survey comment



Refer to Cambridge “shady streets” study to target improved street greening and shading during projects



Minimise hard landscaping and use natural and cool materials as much as possible.

What is it and Why is it Important


Cooling and shading applies both inside and outside buildings, creating pleasant usable spaces. Through a comprehensive heat resiliency approach, overheating and exposure to harmful UV radiation can be addressed through combinations of architectural shading, trees, and green planted surfaces including green roofs. The requirements in the section are primarily intended to be applied in suitable large e.g. multi-home or highways developments.

Must:

- Consider how shading will be incorporated at the preliminary stages of design (policy 28)
- Must include tree planting to deliver shading and heat resilience.
- Green roofs must be maximised by new developments and major improvement works where possible to help absorb heat and reduce temperatures of the roof surface and surrounding air (policy 57)

Should:


- Refer to the Cambridge “Shady Streets” study to target improved street greening and shading
- Street trees should be planted at ten metre centres to achieve a combined canopy cover over time which will help reduce the urban heat island effect.
- Where increasing tree canopy is not practical in public spaces then material canopies and sails should be considered
- Consider the use light colours for roofs and paved surfaces

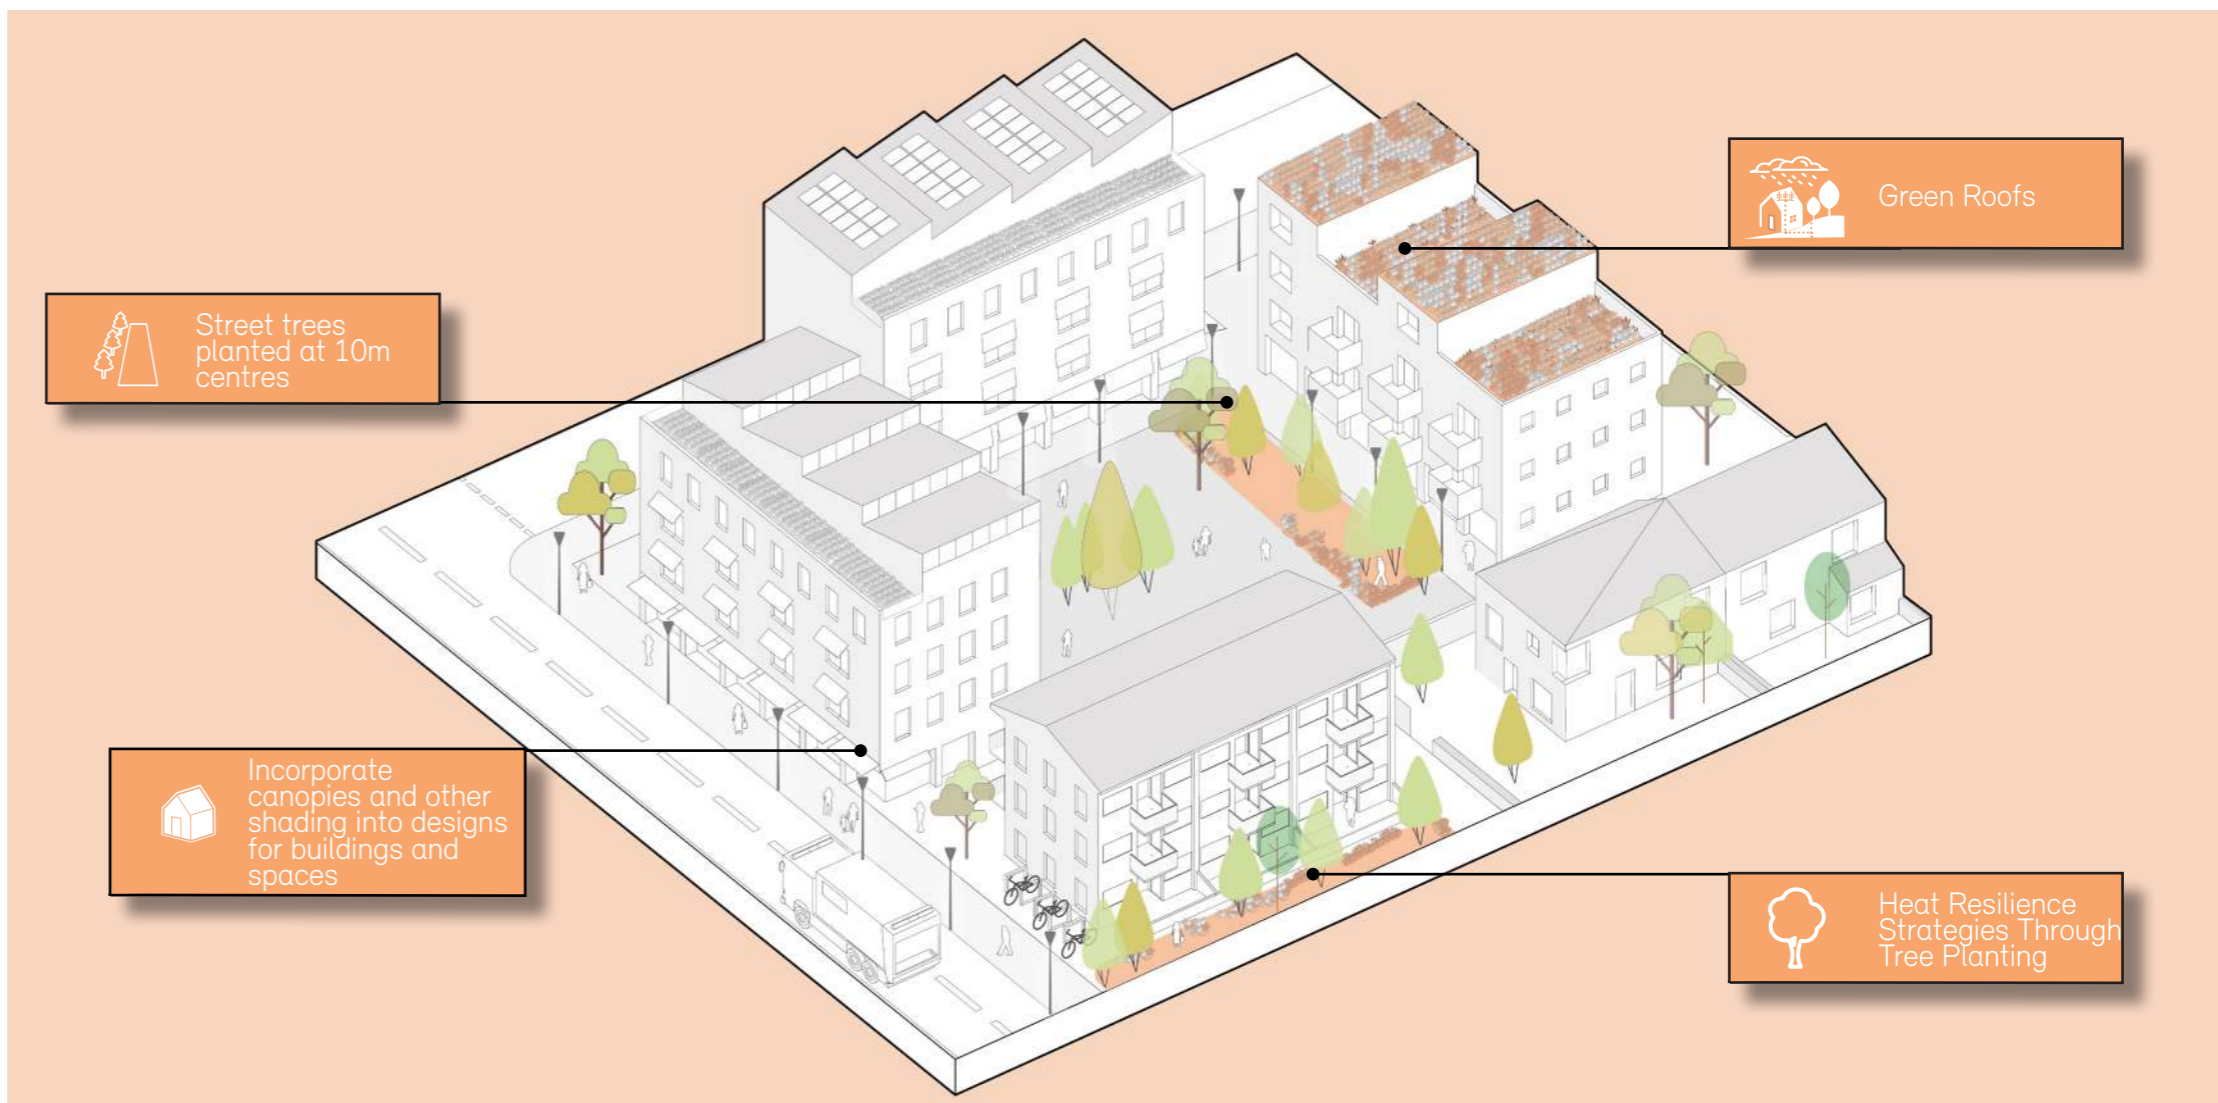

Illustrative diagram showing cooling and shading principles

Resources

- Greener Grangetown - Arup
- Retrofitting your home - Cambridge City Council

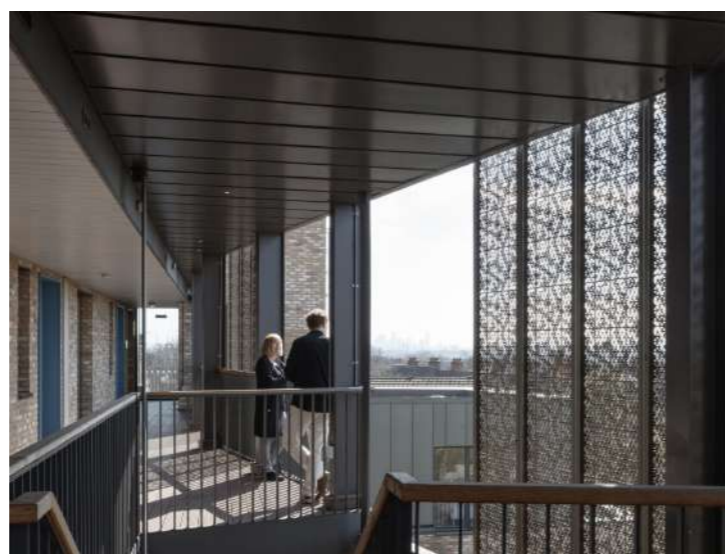

Ornamented screens on a shared resident space, Colby Lodge, Pollard Thomas Edwards




Cooling and Shading Window Detail on Galdsmith Street, Mikhail Riches



Sail shading in public spaces Seville City Council

Improving Existing Buildings

"The most environmentally sustainable building is one that already exists. I believe that more can be done to existing housing stock"
Resident survey comment



Include **PV solar panels** for new developments and encourage fitting PV to existing homes



Provide **EV car charging** infrastructure for new and existing homes

What is it and Why is it Important

The code looks to assist and encourage the sustainable improvement of existing homes and buildings. The most sustainable option for development often includes maintaining, reusing, improving, adapting, or incorporating existing structures.

Use a whole house approach. A good example is the LETI approach, which focuses on rapid reduction in energy use to deliver net zero with a holistic approach.


Applications for extensions to existing dwellings and/or the conversion of ancillary residential floorspace to living accommodation should be accompanied by cost-effective improvements to the energy efficiency of the existing dwelling (policy 30)

Should:

- When planning new development on a site with existing buildings, applications should demonstrate options for adaptation or partial reuse of existing structures have been considered.
- Where buildings are intended to be demolished, proposals should include strategies for reuse or recycling of existing materials for example reusing bricks, with first preference for reuse on site or in the local area.
- Where large multi-home refurbishments are planned, a whole-house approach should be applied. This is because taking energy efficiency measures one by one without attention to how they'll interact can cause problems. For example, adding better glazing and draught-proofing can increase damp problems if you haven't provided suitable ventilation.
- Large-scale improvement works and plan making should be designed in consultation with residents.

All major refurbishment projects should take the coordinated whole-house approach which may include:

- Air Source Heat Pumps (ASHP). These have permitted development rights but should be in rear gardens or screened from the street with an enclosure or planting.
- Rooftop PV panels installed on suitable roofs. On sloping roofs these should be grouped neatly and fitted flush with the surrounding roof finish to avoid visual clutter.
- Better windows e.g. triple glazing. All replacement windows should follow the original design for the building to help retain its character.
- External Wall Insulation (EWI) is an insulating layer that provides a new external finish, wrapping buildings like a warm jacket. Proposals should consider including traditional tile hanging, brick slips, and weatherboarding as new finishes – rather than only using render. This is to avoid large areas of insulated render, which can become dirty and discoloured, and to help maintain texture and add to local character.

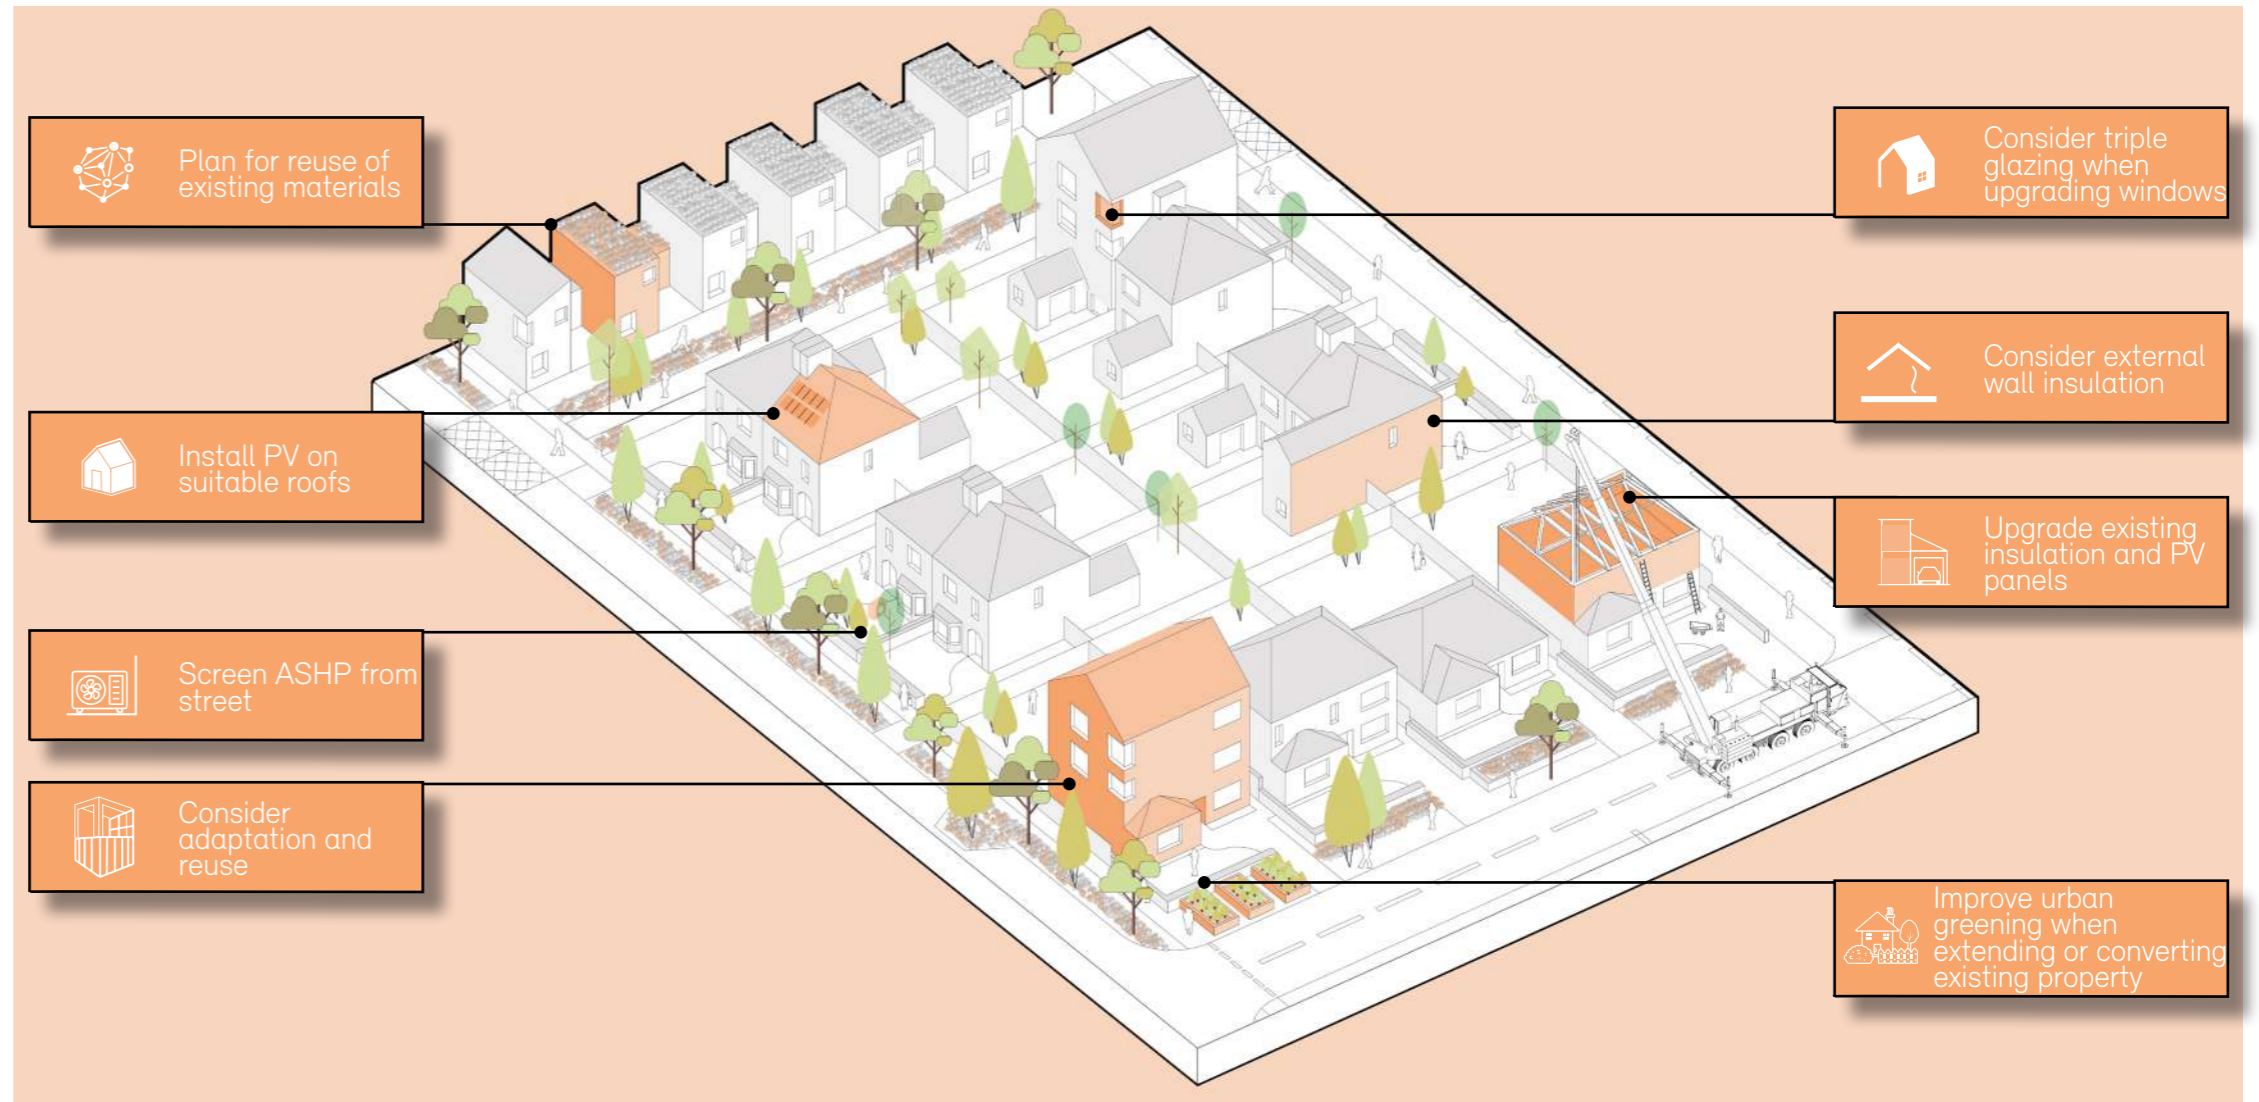


Illustrative diagram showing existing building principles



Insulated render retrofit project, **Cambridge City Council** Design Code, February 2024



Overcladding with boarding to meet "energiesprong" standards, Nottingham, **Richard Partington Architects**

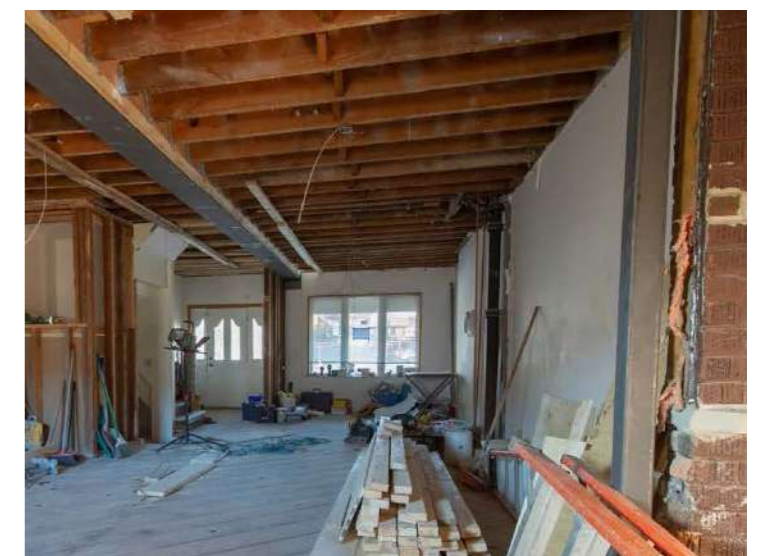

Deep retrofit project on site

Householders Guide

What is it and Why is it Important

80% of the buildings with us today will still be in use in 2050. Existing homes need to be improved to keep them healthy, reduce the resources they consume and the cost of running them. These improvements can usually be done as permitted development.

Cambridge City Council have produced 'Retrofitting your Home' to provide building owners in Cambridge with practical information on how to make their homes more energy efficient. Measures include:

- Seal up gaps in external walls, floors, and doors and windows - saving around £95/220kg carbon a year
- Use LED light bulbs and choose energy-saving appliances - saving around £60/50kg carbon a year
- Use low-flow fittings when upgrading kitchens and bathrooms to reduce the amount of water used
- Lag pipes outside the house and in cold spaces
- The diagram opposite illustrates larger energy reduction projects likely to be suitable for homes in the area. The costs are estimates and assume work will be carried out by accredited contractors

Homes with gardens also have a big role to play in making space for nature


- Aim for at least 50% of your front garden to be planted and use water permeable surfaces for paths and driveways.
- Install a rainwater butt to water the garden
- Use hedges for boundaries on front gardens
- Plant trees for summer shade. Fruiting trees can work well near homes and provide food for birds and other wildlife
- Plant native plants and pollinators and include habitat spaces such as appropriately placed rotting logs and bug hotels. Hedgehog holes in garden fences can help create a network of living garden spaces.

Resources


- Retrofitting Your Home - Cambridge City Council cambridge.gov.uk/media/11676/retrofitting-your-home-report.pdf
- Funding support - <https://www.actiononenergycambs.org/funding/>




Maintain as much of the front garden as possible. Where change is required, aim for at least **50% of your front garden to be planted**



Prioritise simple low cost jobs such as sealing gaps in **external walls, floors, and doors and windows**

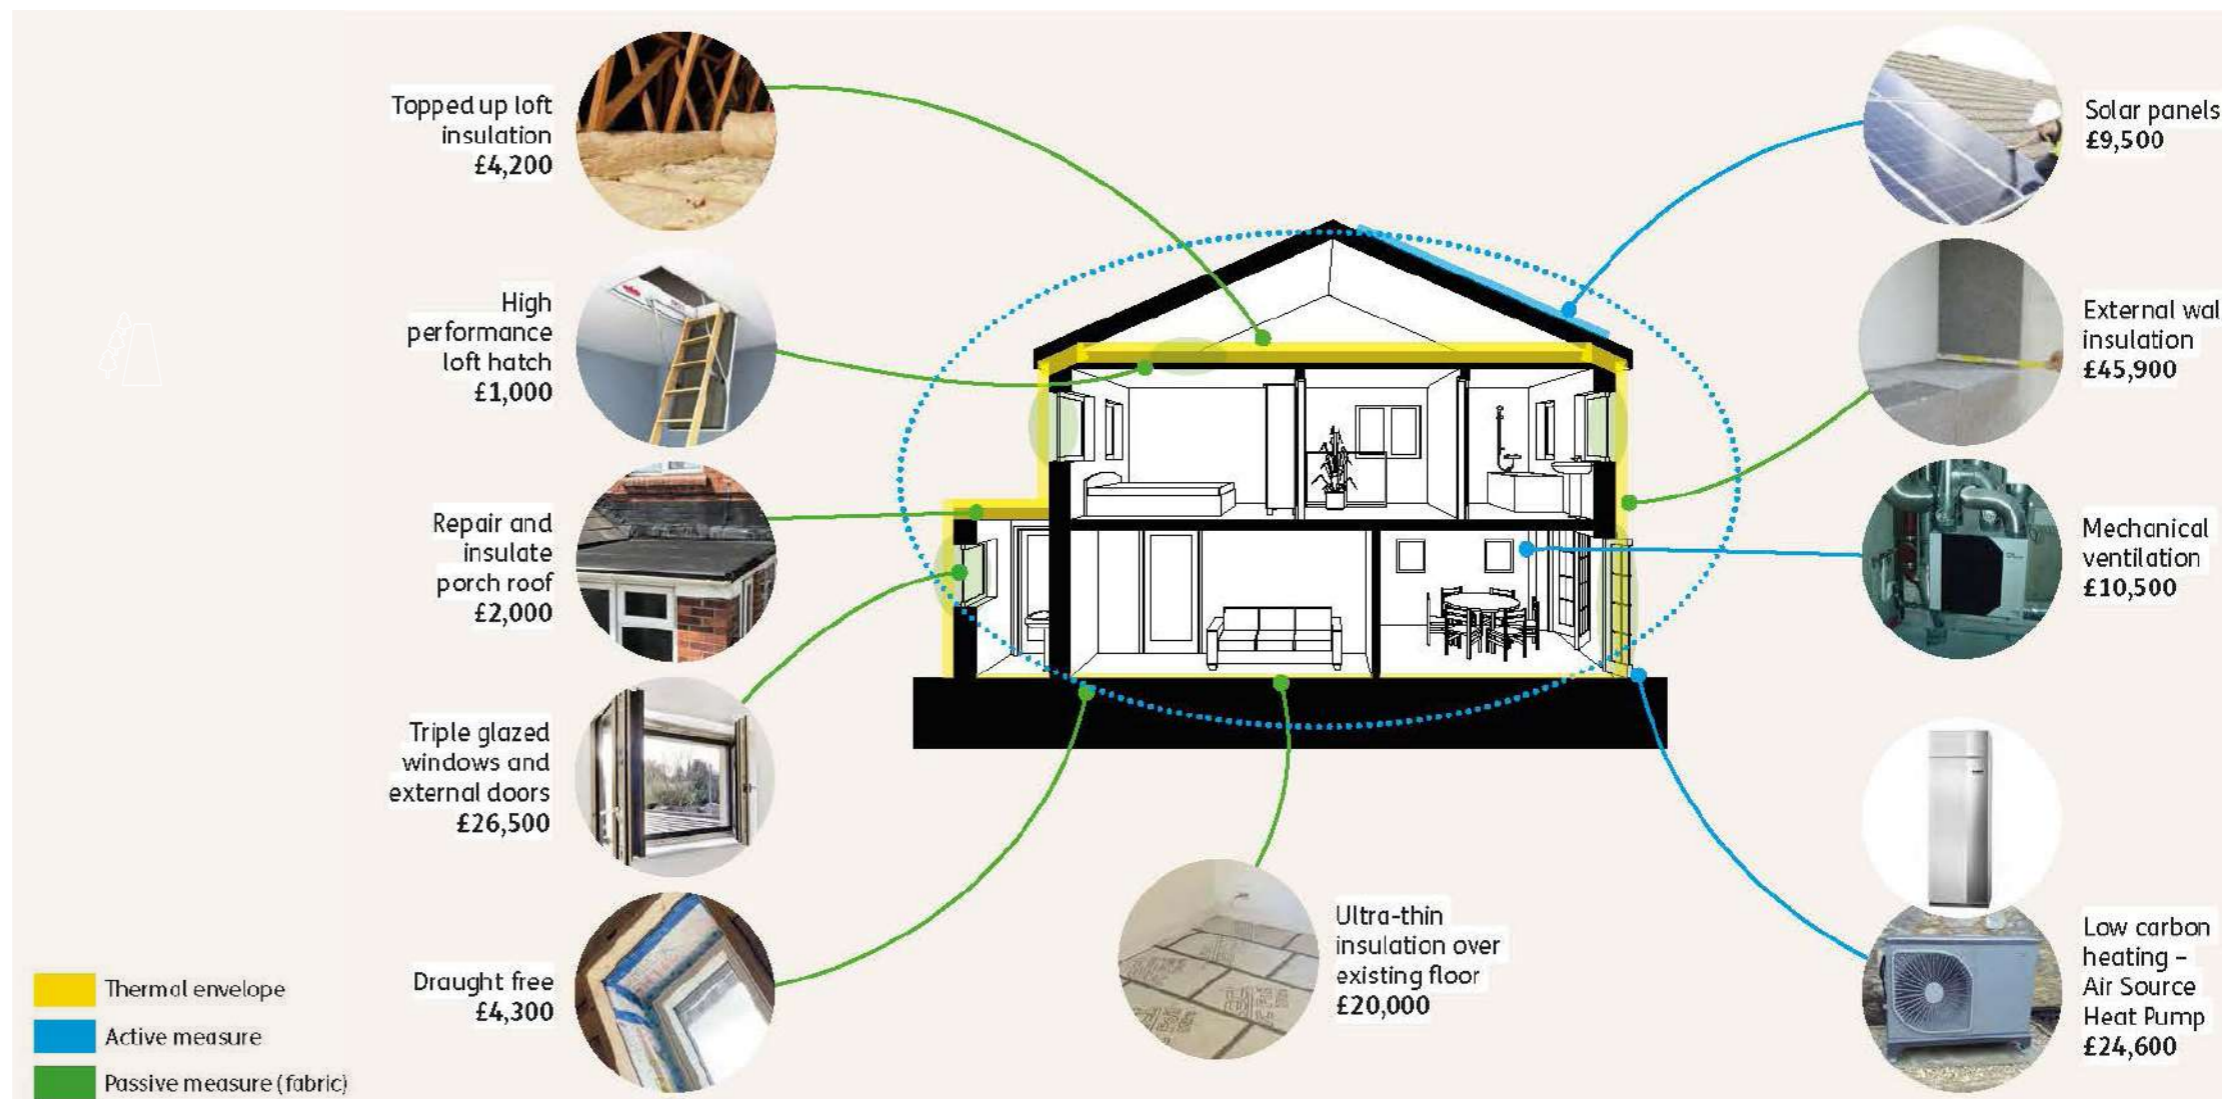

Illustrative diagram showing typical larger sustainability projects and estimated costs to upgrade a typical mid 20th century home (extract from 'Retrofitting Your Home')

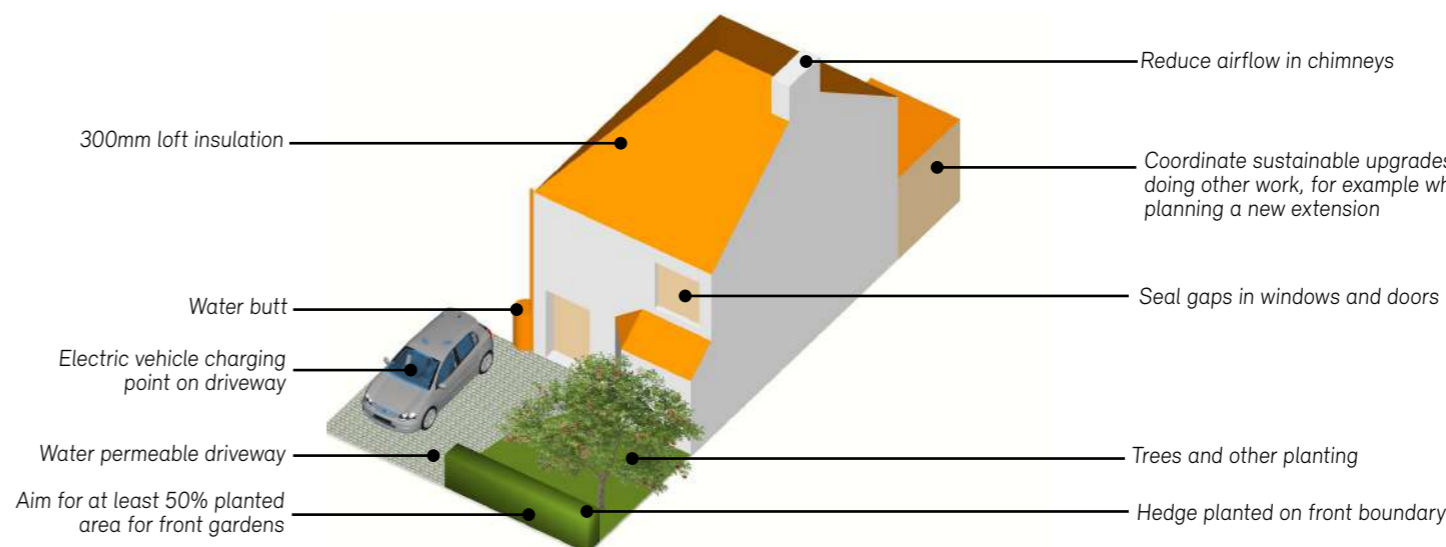

Small scale and lower cost sustainable home improvements

Planning Checklists

Introduction

This compliance checklist has been prepared to assist design teams and planning officers. It is intended to help all involved to ensure that submissions provide the necessary information to demonstrate how the design quality objectives that underpin the Code have been met.

The checklist is intended as a useful companion to the Design Code. It does not replace the Code.

The checklist follows the same structure as the Code, using the 5 Principles. Strategic Design Code outcomes are briefly summarised. In italics, a brief description of documentation that may be useful to support the submission is then provided.

Tick boxes have been included, with a box for each pre-planning stage. These are to help design and planning teams keep on track, sense-check work to date, and ensure timely consideration of important design code requirements during the creative process.

The drawings and statements indicated within this document are not in any way intended as a comprehensive list of planning drawings or documents that will be required within planning applications (albeit they may form part of it). These technical requirements should be confirmed with the planning team.



Easy to use raised planting beds in a shared garden **Woodside Square, Pollard Thomas Edwards**

to be finalised

to be finalised

to be finalised

to be finalised

to be finalised